

HDL11-ACS TAOS




An HDL11 Taos pendant is the perfect option for use with our exclusive ACS. (Aurora Catenary System). With several optic and shroud options ranging from a discreet NS up to an 8" acrylic lens, four optical choices, three sizes of festoon lenses, the HDL11 is highly configurable. The Taos is a perfect choice for many hospitality, retail plaza, or residential applications.

Fixture Features include:

- Interchangeable LED Module in 2, 4 or 6 Watts up to 345 lumens
- Interchangeable UV & Shock Resistant Silicone Optic
- 2700K (80 & 90 CRI) or 3000K (80 CRI)
- Thermally Integrated® and Field Serviceable LED Module
- Dimmable to <10% Triac/Forward Phase) via compatible Transformer
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Also available with Rigid and Hanging Mount Options (See HDL11-RM and HDL11-HL)

Catenary features include:

- Pre-assembled System for Easy Installation
- Compatible with Catenary Cable up to 1/4" dia. (by others)
- Rigid Mount utilizes Swivel-Pro™ allowing up to 15° of cable swag
- Cable Brake System™ prevents luminaire slippage
- J-box and Luminaire Machined from Solid c3600 Brass Alloy
- UL Approved System
- Also available with Non-Catenary Rigid and Hanging Mount
- Options (See HDL11-RM and HDL11-HL)

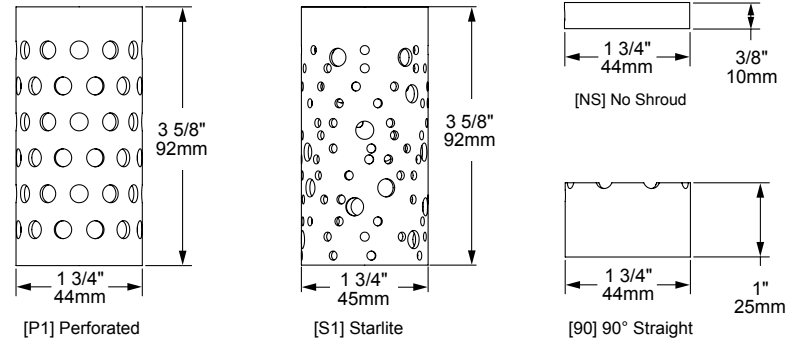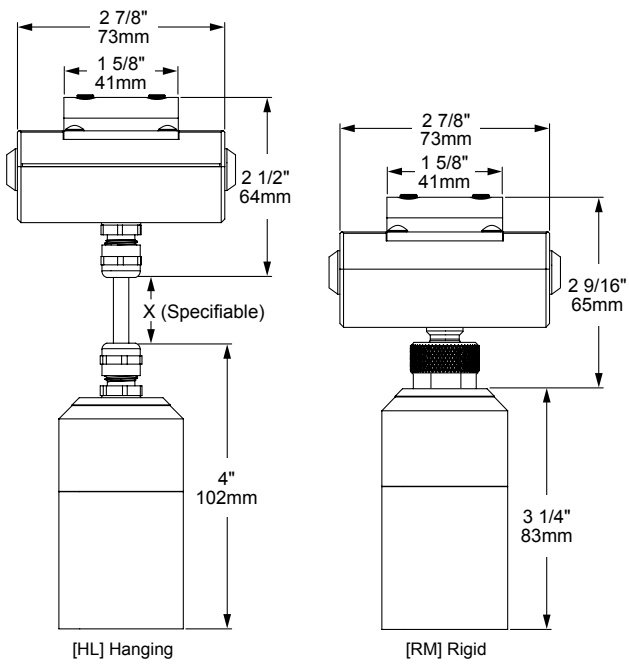

The FIT™ IP67 module is built on Auroralight's Copper Core Technology® platform and includes FIT™ Acrylic Optics.

THERMALLY INTEGRATED

AURORALIGHT

ACS

CATENARY SYSTEM

SEE NEXT PAGE FOR ORDERING INFORMATION



HDL11-ACS TAOS






Prefix

ORDERING GUIDE: **HDL11-ACS** H (HIGH PERFORMANCE) DL (DOWN LIGHT) 11 (SERIES) ACS (AURORA CATENARY SYSTEM)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED [_] QUICK SPEC (See Below)

QUICK SPEC SKU **HDL11-ACS-90-6-W-27-H-HL-NAT**

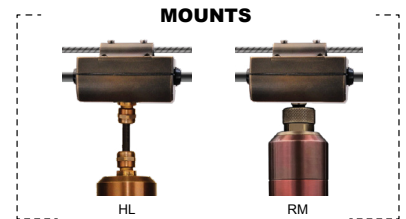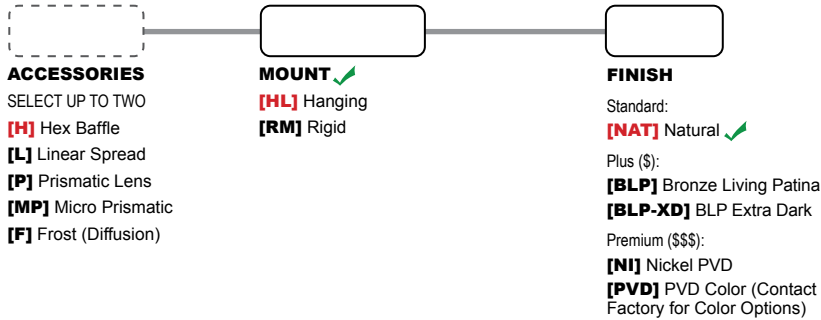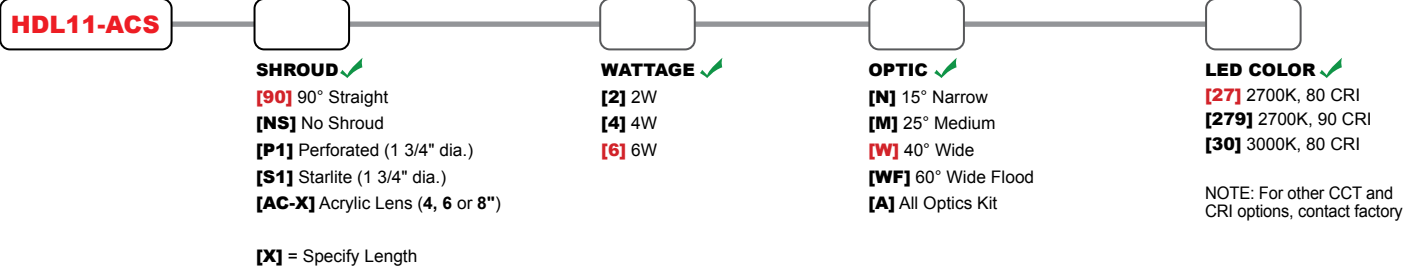


HDL11-ACS TAOS

PHOTOMETRIC OVERVIEW

Information based on 6W 25° Medium Optic. To download more in-depth IES photometric data, visit auroralight.com/product/hsl11-taos/

6W 2700K 345.0 LUMENS • CBCP 1358 AURORALIGHT HDL11-ACS-90-6-M-27		
4 FT	84.9	1.82
6 FT	37.7	2.72
8 FT	21.2	3.63
10 FT	13.6	4.54
12 FT	9.43	5.45
14 FT	6.93	6.35
16 FT	5.30	7.26
Distance From Fixture	Footcandles	Beam Width



6W 3000K 345.1 LUMENS • CBCP 1358 AURORALIGHT HDL11-ACS-90-6-M-30		
4 FT	84.9	1.82
6 FT	37.7	2.72
8 FT	21.2	3.63
10 FT	13.6	4.54
12 FT	9.43	5.45
14 FT	6.93	6.35
16 FT	5.31	7.26
Distance From Fixture	Footcandles	Beam Width

