


TYPE:

CAT. #: DLX16-ACS-

DLX16-ACS MARINER




The DLX16 pendant paired with our exclusive Aurora Catenary System (ACS) is the perfect selection to illuminate plazas, courtyards, and intimate patio areas beautifully. Choose from 3 attractive shroud options to match your aesthetic. Optimized for drop-in MR16 LED lamps for ease of serviceability or customers who prefer LED retrofit lamps as their LED solution.

Fixture features include:

- · Optimized for LED MR16 Lamps (enclosed rated)
- · Solid Brass Construction

Catenary features include:

- · Pre-assembled System for Easy Installation
- · Catenary Cable up to 1/4" dia. accepted (by other)
- Cable Brake System[™] prevents luminaire slippage
- · Solid C3600 Billet Brass Construction
- Also available with a Non-Catenary Hanging Mount Option (See DLX16-HL)

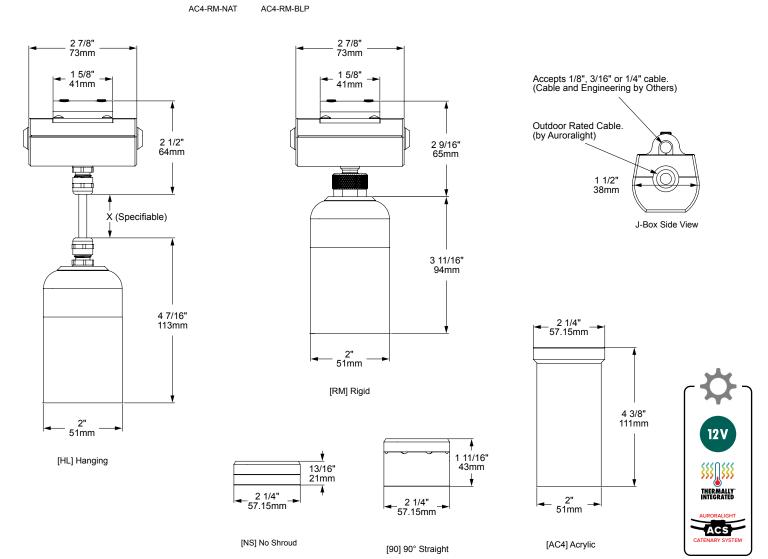









TYPE:

CAT. #: DLX16-ACS-





ORDERING GUIDE: DLX16-ACS) DL (DOWN LIGHT) X (NO LAMP) 16 (MR16 SIZE) ACS (AURORA CATENARY SYSTEM)

QUICK SPEC SKU DLX16-ACS-AC4-7W27-H-HL-NAT

DLX16-ACS

SHROUD (90] 90° Straight [NS] No Shield [AC4] 4"Acrylic

LED LAMP (92 CRI) [7N27] 7W, 15°, 2700K

[**7M27**] 7W, 25°, 2700K [**7W27**] 7W, 35°, 2700K [**7N30**] 7W, 15°, 3000K

[7M30] 7W, 25°, 3000K [7W30] 7W, 35°, 3000K

ACCESSORIES

SELECT UP TO TWO (3/16" each)

[H] Hex Baffle

[L] Linear Spread*
[P] Prismatic Lens*

[MP] Micro Prismatic*

[F] Frost (Diffusion)

[AR] Accessory Retainer (Optional)

* Limit ONE when AR is selected

MOUNT / FINISH

[HL] Hanging

[RM] Rigid

Standard:

[NAT] Natural 🎺

Plus (\$):

[BLP] Bronze Living Patina

[BLP-XD] BLP Extra Dark

Premium (\$\$\$):

[NI] Nickel PVD

[PVD] PVD Color (Contact Factory for Color Options)

LED LAMP FACTS

Brightness	580 lumens	
Life	25,000hrs	er
Energy Used	7.5 watts	ENE
Halogen Equivalent	75 watts	C
CRI	92	
Dimmable	Yes	
Warranty	5yrs	





For factory supplied 7.5w LED lamp



