



EVA

FULLY SEALED HEALTHCARE GRADE LAMP SHADE, HIGH PERFORMANCE LED WALL SCONCE

alva®

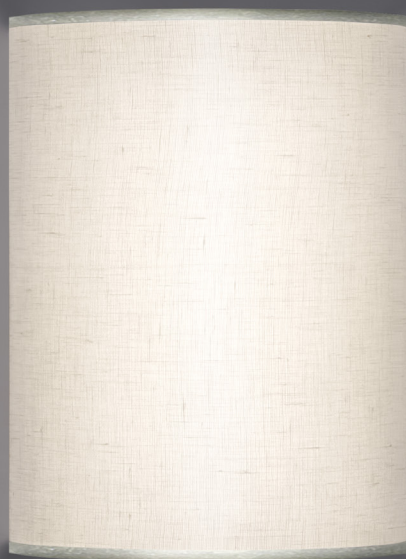

Eva-12 with Island Breeze shade, ESN trim

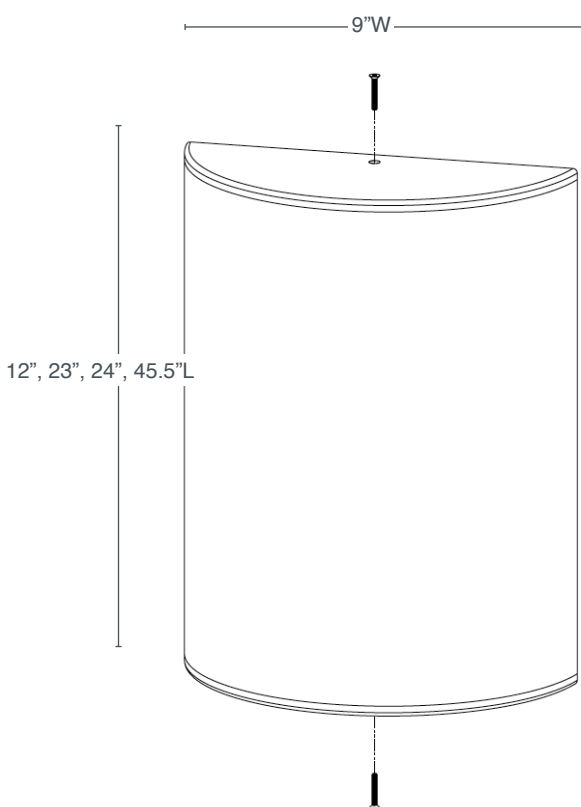

APPLICATIONS

- Healthcare, Senior Living & Multi Family Residential: Patient rooms, corridors, elevator lobbies, hotel or corporate lobbies

SIZES

- 12\"L x 9\"W x 4\" D, 4lbs
- 23\"L x 9\"W x 4\"D, 8lbs
- 34\"L x 9\"W x 4\"D, 12lbs
- 45.5\"L x 9\"W x 4\" D, 16lbs

MOUNTING

- J-Box 3.0 or 4.0 compatible
- Can be mounted vertically or horizontally or ceiling. Refer to installation instructions for details.

TWO DIMMING METHODS INCLUDED

- LUMENSELECT® 4-level light output dial (100%, 75%, 50%, 25%)
- 0-10V Dimming (100-10%)

SPECIFICATIONS

- IK10 UL Certified (protected against 20 joules of impact)
- Title 24 Compliant for Non-Residential applications
- For T24 JA8 certified, contact ALVA
- ADA Compliant
- Fully sealed lamp shade
- 120-277V Input
- Color Temperature Select (CCT), Integrated four CCT select (2700K, 3000K, 3500K, 4000K). OPTIONAL (specify)
- ETL Damp Listed (Wet Listed, IP66 Rated available (option, C.F.))
- Architectural grade finish on trim. Optional Antimicrobial Finish (must specify)
- 10 Year Limited Warranty (excludes shade)
- Tamper Resistant (option)

LAMPING

- 90 CRI (minimum)
- 85 LM/W Performance (module)
- High Efficiency, fully integrated proprietary LED Module
- 12\" - 12.6 W, 1000+ lumens (module without shade)
- 23\" - 25.2 W, 2400+ lumens (module without shade)
- 34\" - 38 W, 3600+ lumens (module without shade)
- 45.5\" - 50.5 W, 4250+ lumens (module without shade)
- Internal power supply
- Modular design, LED Module and power supply easily replaced

CONSTRUCTION

- Shade: Durable ARCHITECTURAL RESIN by ALVA
- Trim: Metal Finish Powder Coat

EVA

FULLY SEALED HEALTHCARE GRADE LAMP SHADE, HIGH
PERFORMANCE LED WALL SCONCE

alva®



Eva is ideal for healthcare applications:

- 12”L for patient room or corridor wall sconces
- 45.5”L above patient beds

Vandal resistant, architectural resin by ALVA® Shade Options



IB - Island Breeze

GS - Gold Shimmer

B - Burano

W - White Resin

A - Autumn

LC - Linear Cross

Metal Trim Powder Coat Finish Options



ESN - Enviro Satin
Nickel

EOB - Enviro Oil-
Rubbed Bronze

WHT - White

EVA


FULLY SEALED HEALTHCARE GRADE LAMP SHADE, HIGH PERFORMANCE LED WALL SCONCE

alva®

LUMENSELECT™

LUMENSELECT™, a dimming control panel on all ALVA luminaires, allows you to customize light output to create the desired atmosphere and to limit the consumption of electricity. The LUMENSELECT™ rotary switch should be turned gently clockwise with a small flathead screwdriver with a 1/8" or 3mm wide tip, one click at a time from factory setting to get desired output level.

LUMENSELECT™ control panel on the end cap of ALVA luminaires:

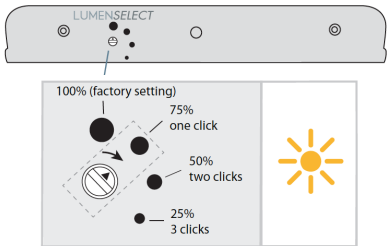

Setting LUMENSELECT™ Levels

ALVA luminaires come factory set at 100% light output. You may choose from four output settings, typically performed at the time of installation:


- 100% light output & energy consumption
- 75% light output & energy consumption
- 50% light output & energy consumption
- 25% light output & energy consumption

LumenSELECT™ Setting	Wattage	Delivered Lumens
100%	24	1224
75%	18	918
50%	12	612
25%	6	306

**Tested with Island Breeze Resin, 3000K CCT*

CCTSELECT

CCTSELECT control panel on the end cap of ALVA luminaires:

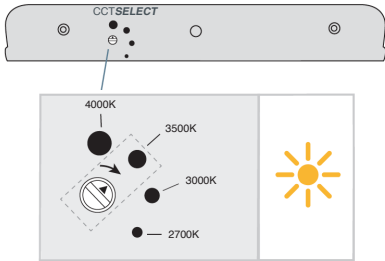

Setting CCTSELECT Levels

ALVA luminaires come set at your call out in your order. If CCT is not indicated, your module will be set at 3000K by default.

Remote Dimming Option, 0 - 10V (100 - 10%)



0-10V dimming may be used with compatible dimmer controls
Please refer to ALVALIGHT.COM for a listing of compatible dimmers



Eva-46 with Island Breeze shade, ESN trim

ORDER CODE:

EVA						
MODEL	LENGTH	SHADE MATERIAL	SHADE PATTERN	METAL TRIM	CCT	ANTIMICROBIAL FINISH
	12 12"	R Resin	B Burano	POWDER COAT FINISH OPTIONS	2700 2700K	
	23 23"		GS Gold Shimmer	ESN Enviro Satin Nickel	3000 3000K	AM Antimicrobial Finish
	34 34"		IB Island Breeze	EOB Enviro Oil-Rubbed Bronze	3500 3500K	
	46 45.5"		A Autumn	WHT White	4000 4000K	
			LC Linear Cross		CS CCT Select Option	
			W White Resin			