

# Pi

Quietly Fixed



Spec-grade performance LED downlights. Optimal for hospitality, high-end residential and corporate projects. Pi downlights offer, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.



- Tool-less Push-and-Release reflector
- 2 options of mounting brackets
- 6mm and 9mm LES COB LED engines
- Dim-to-Warm capability with the "W" output
- Specific driver brands available on request
- Min. Fixture Efficiency 100lm/W (for Static White)
- 5 Years limited warranty



Code example: P i F - N I C - 1 - T - W - W D - 9 - M - W F - W - 1 - S - 0

Housing	H*	Voltage	Trim
INT Remodel	4 in.	1 120V	T With Trim
NIC Non-IC (New)	4 in.	2 240V	0 Trimless
ICN IC (New)	5 in.	3 277V	
ICA IC-Airtight (New)	7 in.	U Unv.	
CHP Chicago Plenum	7 in.		

H\* \*Overall height of housing

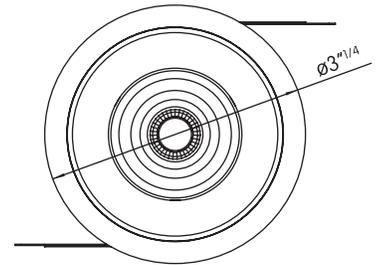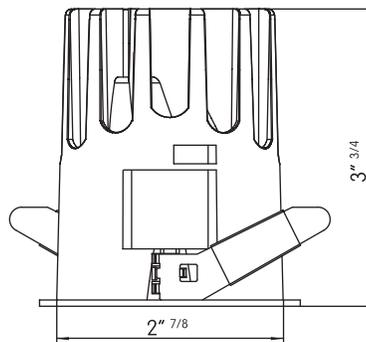

Output*	Color Temp	CRI	Beam	Reflector	Finish	Dimming	Accessories	Emergency
S 950lm (13W)	27 2700°K	8 +80	N 15°	WF Flat White	W Flat White	0 No Dimming	D Diffuse Lens	0 No
H 1300lm (15W)	30 3000°K	9 +90	M 25°	BF Flat Black	B Flat Black	1 0-10V to 1%	S Solite Lens	1 1hr.
W <sup>1</sup> 950lm (15W)	40 4000°K		F 40°	BN Black Nickel	S Silver	2 0-10V to Fade-off	H Honeycomb	2 2hrs.
	WD <sup>2</sup> 3000°K-1900°K			SC Specular Chrome		E ELV Dimming	L Linear Lens	3 3hrs.
				DC Diffuse Chrome		D DALI to 1%		
				BG Bright Gold				
				DG Diffuse Gold				

**Notes:**

\* Denotes Delivered Output at 4,000°K CRI+80

<sup>1</sup> Denotes output specific to Dim-to-Warm feature.

<sup>2</sup> Dim-to-Warm only available in CRI +90.

Check with Factory for Lead-times.

Bold Lighting reserves the right to make technical changes without notice.



**Bold Lighting**  
Atlanta, Georgia, USA  
www.boldlighting.us

e: info@boldlighting.us t: +1-833-BOLD-1-US +1-833-265-3187


# Pi

Quietly Fixed

# bold lighting


## Photometric data: Type C Polar Curves

Narrow Distribution 15°

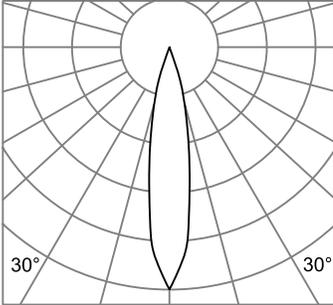


Max. 7,500 cd

Medium Distribution 25°

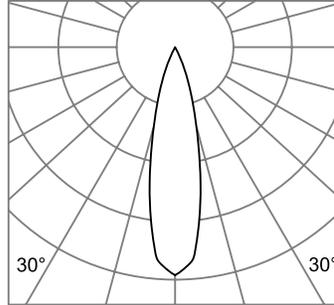

Max. 6,275 cd

Flood Distribution 40°

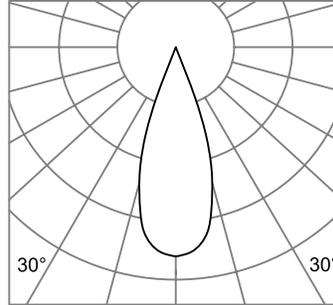


Max. 3,600 cd


## Delivered Lumen Output

Output	Consumption	CRI 80			CRI 90		
		2700K	3000K	4000K	2700 K	3000 K	4000 K
S	9W	896lm	944lm	984lm	796lm	944lm	832lm
H	13 W	1200lm	1268lm	1320lm	1000lm	1064lm	1120lm


## NON-IC HOUSING

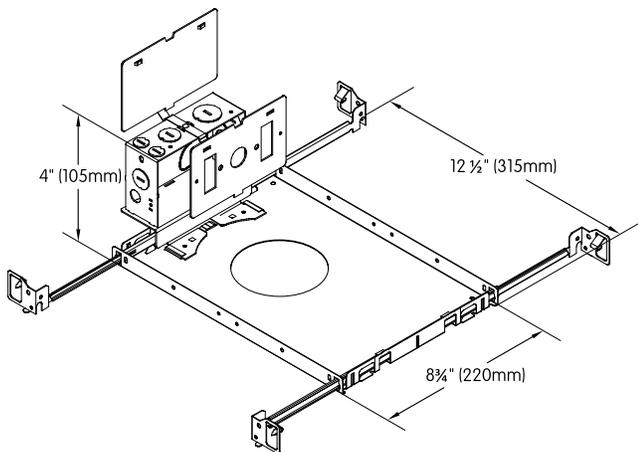

## IC HOUSING

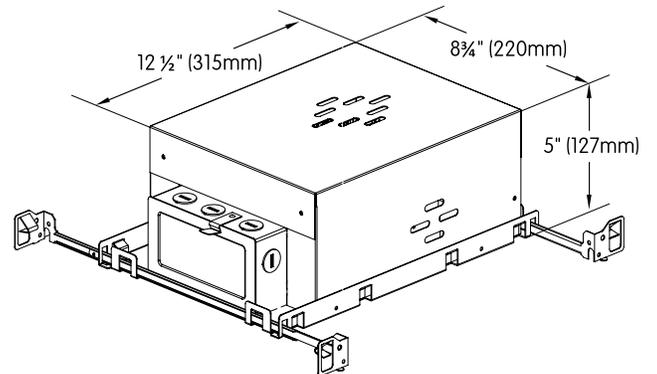

## AIRTIGHT IC HOUSING

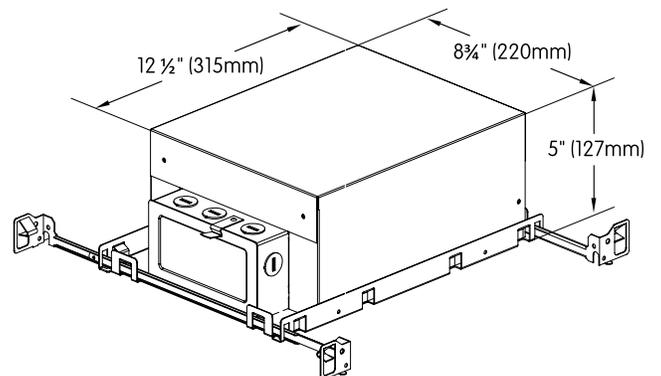

WARRANTY: 5 year limited on LED and driver. See website for details  
LABELS:

 ETL tested to UL standards 1598, Dry/Damp listings

IC/Airtight, compliant. Chicago Plenum Available

 CE Certified

 CCC Certified to GB7000

## Notes:

\* Denotes Delivered Output at 4,000°K CRI+80

<sup>1</sup> Denotes output specific to Dim-to-Warm feature.

<sup>2</sup> Dim-to-Warm only available in CRI +90.

Check with Factory for Lead-times.

Bold Lighting reserves the right to make technical changes without notice.

**Bold Lighting**

Atlanta, Georgia, USA

[www.boldlighting.us](http://www.boldlighting.us)

e: [info@boldlighting.us](mailto:info@boldlighting.us) t: +1-833-BOLD-1-US +1-833-265-3187