

Product Code												
U6		WO	0				67			I		
Series	Mounting	Optic	Beam	CCT	Output	Control Gear	IP	Body finish	Emergency	Layout	Length	Wiring
U6	IS ID	WO	00	827 830 840 927 930 8WD 9TW	M1 M2 M3 D1 D2 D3	A B D F	67	BS WS GS	N	I	12 24 36 48 60 C00	T1 T2



The U060 cut-off washer marks a breakthrough in wall washing illumination as it offers a flawless surface uniformity while blocking the backward and longitudinal light spill. This luminaire is glare and light pollution free! This Wallwasher is designed to be highly configurable in output and lengths, used for interior and/or exterior lighting. Its optics are designed to accommodate a flawless LED color mixing when used for tunable white or RGBW color changing.

The U60 Lightway Cut-Off Washer, (available in black, white or grey) is optically engineered to offer true Wallwash distribution.

Vertical Light uniformity 1:4.

Can be installed up to 4" from adjacent wall without lateral light spill

Optimized cut-off: blocking the backward and longitudinal light spill (glare-free).

Homogeneous color mixing within one reflector: RGBW, warm dimming and dynamic white.

Its LOR is 70% and LED efficiency of 103 lm/W.



USA Revision: 1 Nov 2018

### Mounting

- IS:** Recessed  
inground shallow
- ID:** Recessed  
inground deep

### Optic

**WO:** Cut-Off Washer

### Beam

**00:** No Beam

### CCT

- 8WD:** 1800K - 2780K
- 827:** 2700K, CRI +80
- 830:** 3000K, CRI +80
- 835:** 3500K, CRI +80
- 840:** 4000K, CRI +80
- 927:** 2700K, CRI +90
- 930:** 3000K, CRI +90
- 9TW:** 2200K - 5000K

### Output (Delivered, 3,000K CRI +80)

- M1:** 9W/ft, 500 lm / ft.
- M2:** 12W/ft, 700 lm / ft.
- M3:** 17W/ft, 950 lm / ft.
- D1:** 2x4W/ft,
- D2:** 2x6W/ft,
- D3:** 2x9W/ft,

### Control gear

- A:** NON DIM / ECG
- B:** 0 TO 10 DIM
- D:\*** DALI
- F:\*** 2 Wires Phase Dimming

### IP

**67:** IP67

### Body finish

- BS:** Black Smooth
- WS:** White Smooth
- GS:** Grey Smooth

*\*This driver option is only available integral for fixtures 24" and longer*

### Emergency

**N:** No emergency

### Layout

**I:** I shape

### Length \*


- 12:** 12<sup>3/4"</sup>
- 24:** 24<sup>1/4"</sup>
- 36:** 35<sup>3/4"</sup>
- 48:** 47<sup>1/2"</sup>
- 60:** 59<sup>1/4"</sup>
- C00:** Custom  
For custom length, please note length in Inches

*\*These are rounded values, please refer to installation manual for exact dimensions.*


### Wiring

- T1:** Stand Alone
- T2:** Through Wiring


## Photometric Data:

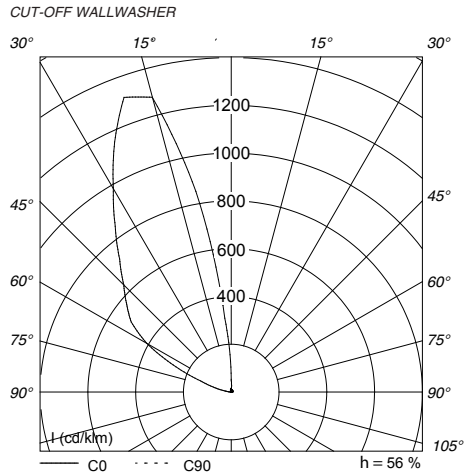


## Mounting ratio:

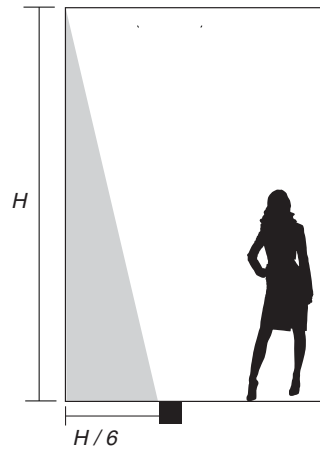


## Sections:

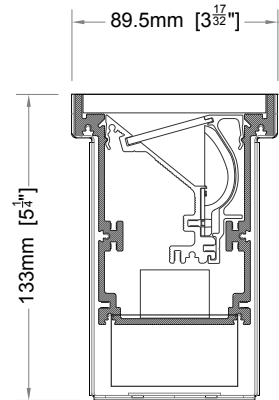

Deep Housing

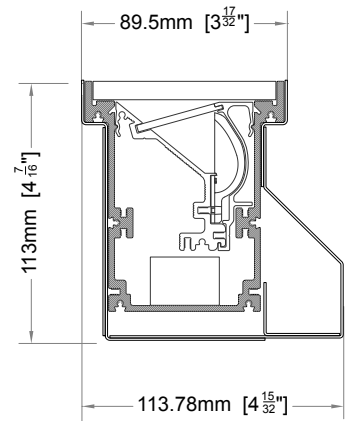


Shallow Housing

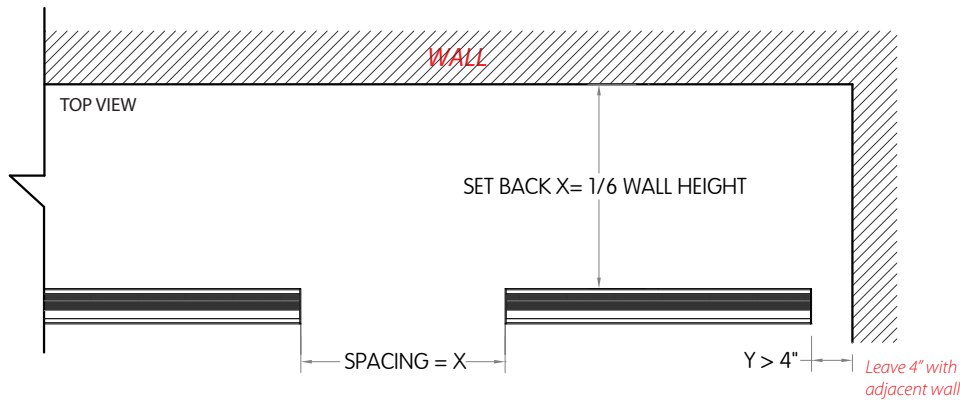

		CRI 80				
		2200K	2700K	3000K	4000 K	5000 K
P1	9 W/ft		500 Lm/ft	550 Lm/ft	600 Lm/ft	
P2	12 W/ft		650 Lm/ft	700 Lm/ft	800 Lm/ft	
P3	17 W/ft		875 Lm/ft	950 Lm/ft	1700 Lm/ft	
D1	4 W/ft	400 Lm/ft				450 Lm/ft
D2	6 W/ft	450 Lm/ft				550 Lm/ft
D3	9 W/ft	600 Lm/ft				750 Lm/ft

## Electrical: 120 - 277 V ; 50 - 60 Hz

### Phase DIM

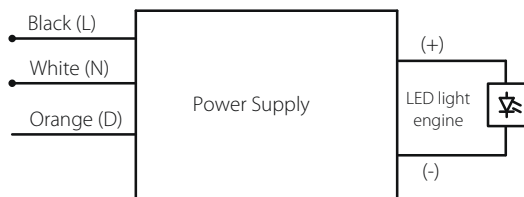

### 1 To 10V DIM / DALI DIM

