

# MIGHTY MAC™

## SSC SERIES

### PRODUCT FEATURES:

- » Surface ceiling mount – 20"×24", 20"×48"
- » TIG welded housing with no post grinding for additional strength
- » Vertically adjustable bracket secured to housing via thru-studs
- » Completely concealed internal drop slot piano hinge



### PROJECT INFORMATION

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

Approved by \_\_\_\_\_

### SPECIFICATIONS

**HOUSING:** One-piece die-formed prime grade material as specified – see ordering information. Corners continuously seam welded and smooth with no post grinding (TIG). Clamshell housing resistant to penetration and contraband concealment. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

**BASEPLATE:** Prime grade material as specified – see ordering information. Die-formed blade trap (1/4" minimum) prevents contraband concealment and access. Embossed standoffs prevent distortion.

**LENS:** As specified – maximum thickness .625" – see ordering information. Kenall recommends a prismatic inner lens and a clear outer lens. Two clear lenses used in combination cannot be provided.

**LENS RETENTION:** Vertically adjustable continuous "Z" brackets of prime grade material, secured to housing via thru-studs (6" maximum spacing).

**HINGE:** Completely concealed 2" drop slot internal piano hinge (1/2" knuckle/1/8" diameter pin) standard. Pin secured to knuckle. Hinge welded to housing and mounts to either side of baseplate via keyholes. See Options for Full Length Internal Hinge (IHF).

**FASTENERS:** Hardened security screws as specified – see ordering information. Fully recessed.

**LAMPS:** Quantity and type as specified – see ordering information. Lamps supplied by others.

**BALLAST:** Quantity and type as specified – see ordering information. All ballasts UL listed class P. Optional removable reflector/lamp/ballast tray with quick disconnect.

**LUMINOUS SEAL:** Polyurethane foam prevents light leaks from luminaire base.

**INSTALLATION:** Fixture not suitable for Surface Conduit or Continuous Row Mounting.

**PHOTOMETRICS:** Efficiency of SSC4-0/0-432-IS-1-120-1/9-1 = 68%. For photometric information, go to [www.kenall.com](http://www.kenall.com).

**WARRANTY:** One (1) year warranty for Kenall fluorescent products.

**LISTINGS:** UL and CUL listed for damp locations. See ordering information for wet location applications.



### ORDERING INFORMATION (Ex: SSC-4-0/0-2-32-RS-1-120- 1/B-1)

Model	Size	Hsg./Door Material	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Lens (Inner/Outer)	Fasteners	Options
<b>SSC</b>	/							/		
<b>Nominal Size</b>		<b>Lamp Quantity</b>			<b>Ballast Quantity</b>			<b>Fastener</b>		
2	20"×24"	2	Two	1	One	1	Torx® Head w/ Center Pin			
4	20"×48"	3	Three	2	Two	2	Allen Head w/ Center Pin			
4		4	Four							
<b>Housing/Base Material</b>		<b>Lamp Type</b>			<b>Voltage</b>			<b>Options</b>		
0	14-Ga CRS (Painted White)	2'	<b>Nominal Length</b>	120	120 Volts	EL•	Standard Lumen EL Pack			
1	16-Ga CRS (Painted White)	17	F17T8	277	277 Volts	PEL•	High Lumen EL Pack			
3	14-Ga SS (Painted White)	17	F17T8	347	347 Volts	SEL•	Specified EL Pack			
4	16-Ga SS (Painted White)	<b>4' Nominal Length</b>			<b>Lens (Inner/Outer)‡</b>			<b>DLN</b>		
6*	14-Ga SS (Brushed)	28	F28T5	0	No Lens	DLN	LED Night Light w/Light Level Control (100% - 20%)			
7*	16-Ga SS (Brushed)	32	F32T8	1	.125" Prismatic Acrylic	FS	Single Fuse & Holder			
9	12-Ga CRS (Painted White)	32	F32T8	2	.125" Prismatic Polycarbonate	IHF	Full Length Internal Hinge			
		54	F54T5HO	3	.125" Textured Polycarbonate	RGT	Removable Gear Tray			
				4	.125" Textured Polycarbonate	SK	Speaker Housing Extension			
				G	.125" Clear Polycarbonate	TN	PL Night Light – 5/7/9 Watt (Lamp supplied by other)(120/277V only)			
				4	.156" Prismatic Polycarbonate	UV	Ultraviolet Filter			
				TG	.125" Textured Tempered Glass	WL	Wet Location Listed			
				6	.187" Prismatic Polycarbonate					
				7	.187" Clear Polycarbonate					
				8	.187" Clear Tempered Glass					
				9	.250" Clear Polycarbonate					
				A	.250" Clear Tempered Glass					
				B	.375" Clear Polycarbonate					
				C	.375" Clear Tempered Glass					
				J	.500" Clear Polycarbonate					
				P	.500" Clear Tempered Glass					



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA


This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at [www.kenall.com/patents](http://www.kenall.com/patents). Content of specification sheets is subject to change; please consult [www.kenall.com](http://www.kenall.com) for current product details. ©2019 Kenall Mfg. Co.

A brand of **legrand**

# MIGHTY MAC™

## SSC SERIES

### DIMENSIONAL DATA

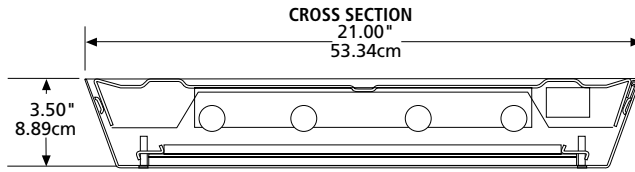

### MOUNTING HOLES

