

# M3 – Mitre™ Wall Sconce

TYPE

- Full cutoff
- Forward throw reflector
- Egress applications
- Cast aluminum construction
- Molded memory retentive silicone gaskets
- Vandal resistant
- Powder coat finish in 13 standard colors with a polymer primer sealer



M3

## 1. LUMINAIRE

## 2. COLOR

## 3. OPTIONS

### 1. LUMINAIRE

M3-CF (Wall sconce with 120 thru 277 volt electronic ballast for use with a 26, 32, or 42 watt 4 pin compact fluorescent lamp. Specify wattage. -18°C min start temp)

### 2. COLOR

WH Arctic White	VBU Verde Blue
BL Black	CRT Corten
BLT Matte Black	MAL Matte Aluminum
DB Dark Bronze	MG Medium Grey
DGN Dark Green	AGN Antique Green
TT Titanium	LG Light Grey
WDB Weathered Bronze	RAL Premium Color
MDB Bronze Metallic	CUSTOM ** Contact Factory

### 3. OPTIONS

BBU (Battery backup powers a compact fluorescent lamp for up to 90 minutes during a power failure. Operating temp 0°C to 55°C)

### SPECIFICATIONS

#### HOUSING

The fixture shall be one-piece cast 356 aluminum with a minimum wall thickness of .188 inch. The housing shall mount over a 3 3/4 inch octagonal wall box. The lens is clear DR acrylic, sealed to the housing with a silicone gasket. The fixture is relamped by loosening four captive stainless steel fasteners.

The optical assembly shall consist of a die formed, specular Alzak® reflector with forward throw optics. The reflector is easily removed for easy access to the ballast.

The ballast shall be electronic, rated for -18°C starting with a 4 pin, 26, 32 or 42 watt lamp socket. The ballast is factory mounted and wired in the housing.

The fixture is attached with two stainless steel screws to an adapter ring that mounts to a 3 3/4 inch octagonal wall box. Adapter ring and hardware are included. Fixture is available in the down position only.

#### FINISH

Fixture finish consists of a five stage pretreatment regimen with a polymer primer sealer, oven dry off and top coated with a thermoset super TGIC polyester powder coat finish. The finish shall meet the AAMA 605.2 performance specification which includes passing a 3000 hour salt spray test for corrosion resistance.

#### CERTIFICATION

The fixture is listed with ETL for outdoor, wet location use, UL1598 and Canadian CSA Std. C22.2 no.250.

#### WARRANTY / TERMS AND CONDITIONS OF SALE

Download:

<http://www.hubbellighting.com/resources/warranty/>


AAL reserves the right to change product specifications without notice.

JOB \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_




ARCHITECTURAL AREA LIGHTING  
16555 East Gale Ave. | City of Industry | CA 91745  
P 626.968.5666 | F 626.369.2695 | [www.aal.net](http://www.aal.net)  
Copyright © 2012 | REV 2.15

DIMENSIONS

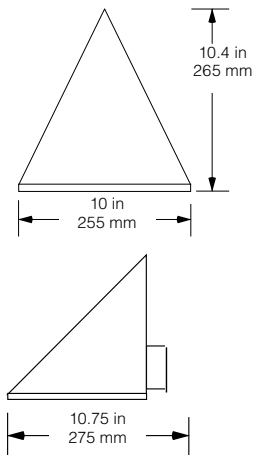

WEIGHT: 10 lbs  
IP: 65

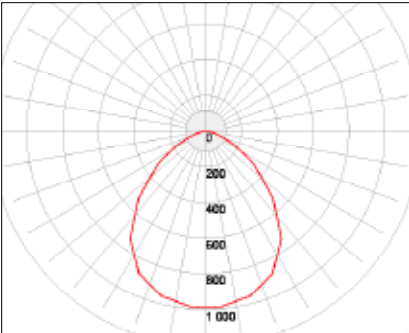M3				WATTAGE: 43	LUMEN OUTPUT: 1902	EFFICACY: 74.4
ZONE	LUMENS	%LAMP	%LUMINAIRE			
0 - 30	545	17.0%	28.6%			
0 - 40	920	28.8%	48.4%			
0 - 60	1613	50.4%	84.8%			
60 - 90	289	9.0%	15.2%			
0 - 90	1902	59.5%	100%			
90 - 180	0	0%	0%	UPLIGHT 0% DOWNLIGHT 100%		
0 - 180	1902	59.5%	100%			

[IES files can be found at www.aal.net](http://www.aal.net)