

CCE

THIN DIE CAST LED EMERGENCY EXIT

tradeSELECT®

FEATURES

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Dual-voltage 120 or 277V AC input
- Emergency models include long-life 2.4VDC Nickel Cadmium battery for UL recognized 90 minute operation
- Damp Location Listed(0° to 50°C)
- Provided with test switch and AC-On indicator
- Canopy Included
- 24hr. Re-charge



RELATED PRODUCTS

- ∅ [CU2 - LED Emergency Light](#)
- ∅ [CU2SQ - LED Emergency Light](#)

SPECIFICATIONS

APPLICATION

- The CCE Series can be applied in stair-wells, hallways, offices and other commercial applications.

CONSTRUCTION

- The CCE Series offers quality and value with a compact and attractive Thin Die-Cast aluminum Exit sign
- The Exit face-plate is brushed aluminum with black edges and 6" letters with a red or green diffuser
- Test switch and AC-on indicator located at bottom center
- Directional indication made by knock-out chevrons

INSTALLATION

- Single-face models can be wall, end or ceiling mounted
- Double-face models are end or ceiling mounted only
- Includes canopy and universal mounting plate

ELECTRICAL

- Available with battery for emergency operation or AC only

CERTIFICATIONS

- UL924 Listed for Wet Location
- NFPA 101 and NFPA 70
- OSHA


WARRANTY

- 2 year full unit warranty
- See [HLI Standard Warranty](#) for additional information

ORDERING GUIDE

| Catalog Number | Description |
|----------------|--|
| CCEBRE | Brushed Face, Black Housing, Single-Face, Red, Emergency |
| CCEBRE | Brushed Face, Black Housing, Double-Face, Red, Emergency |
| CCEBGE | Brushed Face, Black Housing, Single-Face, Green, Emergency |
| CCEBGE | Brushed Face, Black Housing, Double-Face, Green, Emergency |
| CCEBR | Brushed Face, Black Housing, Single-Face, Red, AC |
| CCEBR | Brushed Face, Black Housing, Double-Face, Red, AC |
| CCEBG | Brushed Face, Black Housing, Single-Face, Green, AC |
| CCEBG | Brushed Face, Black Housing, Double-Face, Green, AC |

DIMENSIONS

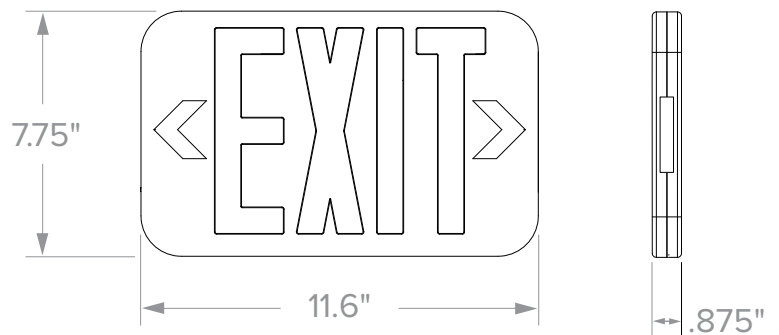

| | |
|------------------------|----------|
| Single Carton Weight | 2.8 lbs. |
| Master Carton Quantity | 8 each |

INPUT POWER REQUIREMENTS

| | Input Watts (W) | |
|-----|-----------------|------|
| | 120V | 277V |
| CCE | 1W | 1W |