

# CSR

INTERNATIONAL VOLTAGE SALIDA LED EXIT

tradeSELECT®

## FEATURES

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Meets International input voltage requirements
- Optional long-life 4.8V Nickel Cadmium battery for 90 minute emergency lighting
- Provided with test switch and AC-On indicator
- Canopy Included



## RELATED PRODUCTS

- ⌘ [CU2 - LED Emergency Light](#)
- ⌘ [CU2SQ - LED Emergency Light](#)

## SPECIFICATIONS

### APPLICATION

- The CSR Series can be applied in stair-wells, hallways, offices and other commercial applications. Offers 120 or 220-240VAC input at 50/60HZ
- The Compass International Exit offers quality and value with a compact and attractive LED based emergency exit

### CONSTRUCTION

- The white housing is made of high impact UL flame rated thermoplastic
- Snap together canopy, housing and removable chevrons for quick and easy installation

### CERTIFICATIONS

- Manufactured to UL standards
- NFPA 101 and NFPA 70
- OSHA

### INSTALLATION

- Universal single or double-face with SALIDA panel

### WARRANTY

- 2 year full unit warranty
- See [HLI Standard Warranty](#) for additional information


## ORDERING GUIDE

Catalog Number	Description
CSRIV	120/220-240VAC, 50/60Hz., Universal SALIDA Face, Red LED, AC only
CSREIV	120/220-240VAC, 50/60Hz., Univ. SALIDA Face, Red LED Emergency, NiCad battery

## INPUT POWER REQUIREMENTS

	Input Watts (W)		Input Amps (A)	
	120VAC	230VAC	120VAC	230VAC
CSR	3.8	3.8	0.034	0.02

## DIMENSIONS

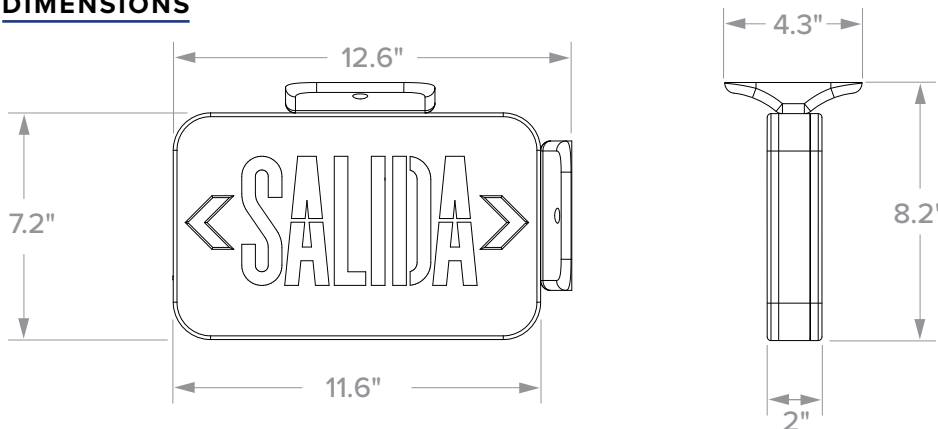

Single Carton Weight	2lbs.
Master Carton Quantity	6 each