



## CCEL Series

### Chicago Edge-Lit Exit Sign

#### FEATURES

##### Description

The CCEL Series offers bright, even and highly reliable LED illumination with direction configurable STAIRS or EXIT acrylic panels. The surface mount housing is made of extruded aluminum and the recessed in 20 gage steel with satin aluminum or white finish. The surface mount design can be top, end or ceiling mounted by use of a supplied canopy. The recessed design can be ceiling or wall mounted by selection and includes a back-box.

##### Application

The CCEL Series is approved for use in the City of Chicago and can be configured with STAIRS or EXIT to include the directional arrow.

##### Compliances

City of Chicago

UL Listed for Damp Locations (0C° to 50°C)

NFPA101, NEC, OSHA

##### Warranty

5 year full unit warranty

##### Features

- Quick installation
- Dual 120/277VAC input
- Includes long-life 4.8VDC Nickel Cadmium battery
- Full re-charge within 24 hours
- AC-on and test switch
- Fully automatic two-stage charger
- Surface or Recessed models with STAIRS or EXIT

Catalog Number	
Comments	Type



Recessed  
Ceiling Mount



Surface Mount

#### MADE TO ORDER MODELS

### CCEL

Model	Mounting Type	Faces	Operation	Finish Color	Panel Code
	<b>S</b> Surface <b>R</b> Recessed Ceiling <b>W</b> Recessed Wall	<b>S</b> Single <b>D</b> Double	<b>A</b> AC Only <b>E</b> Emergency	<b>A</b> Aluminum <b>W</b> White	<b>Single Face Models</b> <b>3</b> "EXIT" (no arrows) <b>6</b> "EXIT" (right arrow) <b>9</b> "EXIT" (left arrow) <b>12</b> "EXIT" (double arrow)  <b>2</b> "STAIRS" (no arrows) <b>5</b> "STAIRS" (right arrow) <b>8</b> "STAIRS" (left arrow) <b>11</b> "STAIRS" (double arrow)  <b>Double Face Models</b> <b>18</b> "EXIT" (no arrows) <b>21</b> "EXIT" (right / left arrow) <b>24</b> "EXIT" (double arrow)  <b>17</b> "STAIRS" (no arrows) <b>20</b> "STAIRS" (right / left arrow) <b>23</b> "STAIRS" (double arrow)

**Note: Stocked Models on Page 2**

#### INPUT POWER REQUIREMENTS

	Input Watts (W)		Input Amps (A)	
	120VAC	277VAC	120VAC	277VAC
<b>AC Models</b>	4.3	4.7	0.040A	0.02A
<b>Emergency Models</b>	4.5	4.9	0.042A	0.02A



## STOCKED MODEL ORDERING GUIDE

### Housing

Catalog Number	Description
CCELSWA-NP	Surface, AC, White, No Panel
CCELSWE-NP	Surface, EM, White, No Panel
CCELSWA-NPS	STAIRS, Surface, AC, White, No Panel
CCELSWE-NPS	STAIRS, Surface, EM, White, No Panel
CCELRWA-NP	Recessed, AC, White, No Panel
CCELRWE-NP	Recessed, EM, White, No Panel
CCELRWA-NPS	STAIRS, Recessed, AC, White, No Panel
CCELRWE-NPS	STAIRS, Recessed, EM, White, No Panel
CCELR-WALLKIT	Recessed Wall Mount Kit(EXIT)
CCELR-WALLKIT-STAIRS	Recessed Wall Mount Kit(STAIRS)

#### Notes:


1. Housing Size is different for EXIT or STAIRS
2. The recessed wall-mount kit is specific for EXIT or STAIRS. Ensure correct selection.
2. Order appropriate housing, then order corresponding panel shown below

### Panel


Catalog Number	Description
CEP3-ENA	EXIT panel, no arrow
CEP6-ERA	EXIT panel, Right Arrow
CEP9-ELA	EXIT panel, Left Arrow
CEP12-EDA	EXIT panel, Double Arrow
CEP18-ENA	Double Face EXIT panel, no Arrow
CEP24-EDA	Double Face EXIT panel, Double Arrow
CEP21-ELARA	Double EXIT panel, Left/Right Arrow
CEP2-SNA	STAIRS panel, no arrow
CEP5-SRA	STAIRS panel, Right Arrow
CEP8-SLA	STAIRS panel, Left Arrow
CEP11-SDA	STAIRS panel, Double Arrow
CEP17-SNA	Double Face STAIRS panel, no Arrow
CEP23-SDA	Double Face STAIRS panel, Double Arrow
CEP20-SLARA	Double Face STAIRS panel, Left/Right Arrow

## PANEL FACE CONFIGURATIONS

### Single-Face Selections

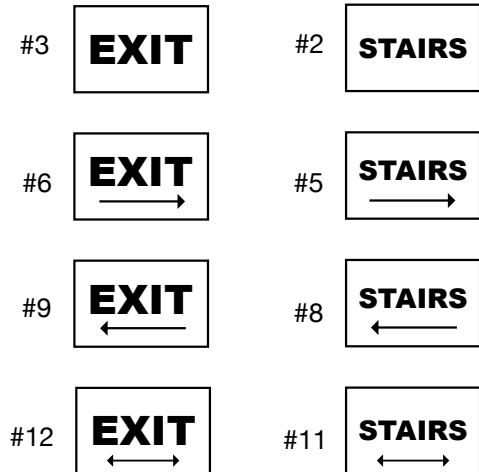

### Double-Face Selections

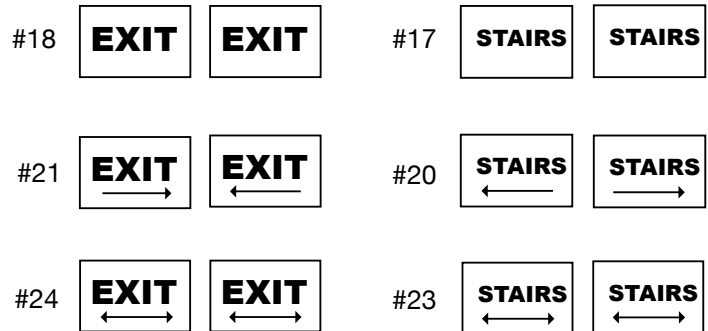

## DIMENSIONS

