

**LED**



**INTERACTIVE MENU**

- [Ordering Guide](#)
- [Dimensional Data](#)

**EXTERNAL LINKS**

- [Captivate Brochure](#)

**PROJECT INFORMATION**

Project Name \_\_\_\_\_

Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Date \_\_\_\_\_

Captivate provides a clean, architecturally pleasing solution for illuminating the vanity that is ideal for healthcare, hospitality, commercial and residential applications. The indirect, backlit solution delivers soft illumination that is well suited for facial rendering.

**FEATURES**

- Perimeter etched panels are indirectly backlit to provide uniform illumination.
- Available in four sizes (18"x39", 25"x43", 31"x43" and 37"x43").
- Mirror edges have brushed, radius treatment for consistency in appearance.
- Optional integrated night light in White (3000K) or amber (590nm) is located in the lower horizontal window.
- Simple mounting of the housing and mirror.
- All models are ADA compliant.
- Standard with 0-10V dimming.



**CAPTIVATE**

**CONSTRUCTION**

One-piece 18ga. CRS housing and powder coated brackets. The mirror is 0.25" thick with etched windows for backlighting.

**INSTALLATION/MOUNTING**

Housing is surface mounted with four mounting points. Mirror brackets attach to the housing with safety screws to lock the mirror in place. A perimeter gasket between the housing and mirror ensures soft contact and prevents damage to the mirror.

**FINISH**

The housing has a white, polyester powder coat paint with an antimicrobial additive to inhibit the growth of microbes.

**LIGHT SOURCE**

LEDs are mounted around the perimeter of the housing to provide indirect backlighting for enhanced uniformity. Available in three different CCTs (3000K, 3500K, and 4000K) with a CRI of >80. Captivate is standard with 0-10V dimming.

**OPTIONAL NIGHT LIGHT**

The night light option is available for all sizes and is mounted in the housing. It is available in either white (3000K) or amber (590nm) and for 120-277V.

**ELECTRICAL**

Available with Universal Voltage (120-277V, 50/60 Hz).

**CERTIFICATION**

Built and tested to UL1598 standard and bears the cCSAus label for Damp Locations.

**WARRANTY**

5 year warranty on housing and electrical components.


**ORDERING INFORMATION**

EXAMPLE CML1-3143-8-35-U-NW

YOUR ORDER **CML1 - 8 - U -**

CML1		8		U		OPTIONS	
MODEL	LENGTH	CRI	COLOR TEMP	VOLTAGE			
<b>CML1</b> Captivate Mirror Light	<b>1839</b> 18"W x 39"H (nom.) <b>2543</b> 25"W x 43"H (nom.) <b>3143</b> 31"W x 43"H (nom.) <b>3743</b> 37"W x 43"H (nom.)	<b>8</b> >80	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>U</b> Universal (120-277V)	<b>NW</b> Night light-white (3000K) <b>NA</b> Night light-amber (590nm) <b>TR</b> Tamper-resistant hardware		

**DIMENSIONAL DATA**

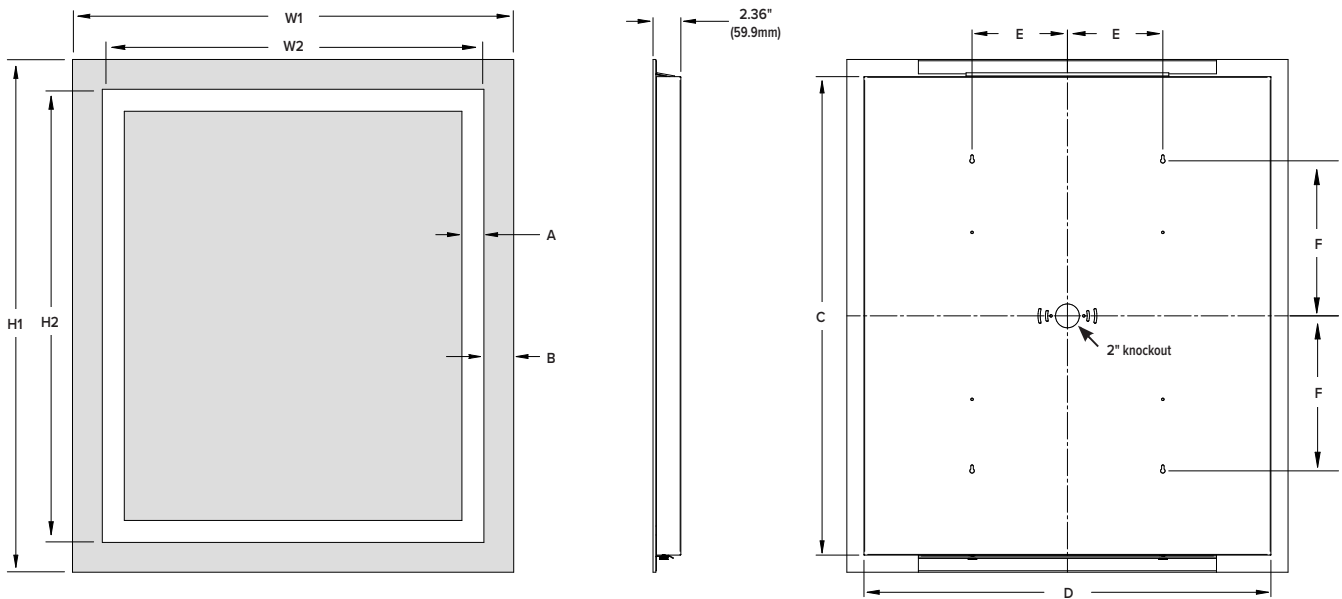

**CAPTIVATE PERFORMANCE CHART**

Mirror Size	3500K			INPUT CURRENT	
	With Mirror			120V	277V
	Lumen	Wattage	LPW		
<b>43"x37"</b>	1689	35.9	47	0.302 A	0.130 A
<b>43"x31"</b>	1653	36.2	45.7	0.304 A	0.131 A
<b>43"x25"</b>	1140	24.4	46.7	0.205 A	0.088 A
<b>39"x18"</b>	912	24.3	37.5	0.208 A	0.088 A

	MODEL #			
	1839	2543	3143	3743
<b>H1</b>	39.0" (990.6mm)	43.0" (1092.2mm)	43.0" (1092.2mm)	43.0" (1092.2mm)
<b>H2</b>	31.3 (795.0mm)	34.3" (992.0mm)	34.3" (992.0mm)	34.3" (992.0mm)
<b>W1</b>	17.7" (449.6mm)	24.7" (627.4mm)	31.0" (787.4mm)	37.0" (939.8mm)
<b>W2</b>	10.0" (254.0mm)	16.0" (406.4mm)	22.3" (566.4mm)	28.3" (718.8mm)
<b>A</b>	1.8" (45.7mm)	1.8" (45.7mm)	1.8" (45.7mm)	1.8" (45.7mm)
<b>B</b>	2.0" (50.8mm)	2.5" (50.8mm)	2.5" (50.8mm)	2.5" (50.8mm)
<b>C</b>	37.1" (942.3mm)	40.1" (1018.5mm)	40.1" (1018.5mm)	40.1" (1018.5mm)
<b>D</b>	15.8" (401.3mm)	21.8" (553.7mm)	28.1" (713.7mm)	34.1" (916.9mm)
<b>E</b>	7.4" (188.0mm)	5.0" (127.0mm)	8.0" (203.2mm)	8.0" (203.2mm)
<b>F</b>	13.0" (330.2mm)	13.0" (330.2mm)	13.0" (330.2mm)	13.0" (330.2mm)