

INTERCEPT® ARENA/SPORTS FLOODLIGHT

Cat.#

Job

Type



HUBBELL
Outdoor Lighting

Approvals

SPECIFICATIONS

Intended Use:

Indoor lighting applications such as sports or entertainment arenas. Specifically designed to mount fixture head and remote driver box to catwalk for easy accessibility

Construction:

- Heavy duty die-cast aluminum housing
- Light engines are remote from driver box
- UV stabilized polyester powder paint finish
- Horizontal and vertical aiming

LED:

- Modular optical assemblies enable 3 unique performance packages
- 90K lumens, 880 Watts
- 60K lumens, 580 Watts
- 48K lumens, 440 Watts
- 3000K, 4000K, 5000K CCT
- 70, 80 or 90 CRI

Optical/Electrical:

- Four distributions to maximize performance: 2x2, 3x3, 4x4, 5x5
- -40°C TO 40°C operating temp range
- 20kA surge protection device standard
- 0-10V dimming driver standard, dimming leads must be extended for connection to control systems (CD option)
- 120-480V configurations 50/60Hz
- Driver RoHS compliant

Installation:

- Heavy duty yoke mount secured with ¾" bolt

Fixture Listings:

- Listed to UL1598

Warranty:


For more information visit:

<http://www.hubbellighting.com/resources/warranty/>


PRODUCT IMAGE(S)



DIMENSIONS

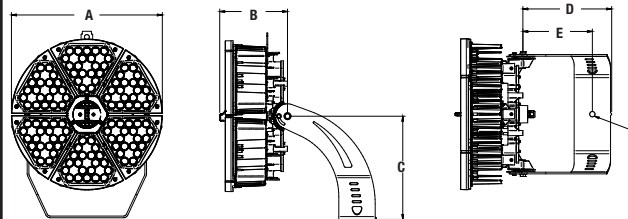

A	B	C	D	E	F	Weight
22.79"	10.24"	15.60"	13.42"	10.5"	.81	73 lbs.
578 mm	260 mm	396 mm	340 mm	266 mm	20 mm	33 kg

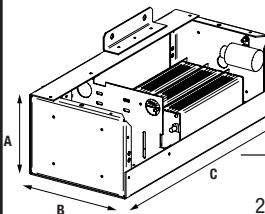

REMOTE DRIVER

A	B	C	Weight
9.5"	11.5"	21.5"	32 lbs.
241 mm	292 mm	546 mm	14.5 kg

CERTIFICATIONS/LISTINGS



ORDERING INFORMATION

VAS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

SERIES	MOUNT	ENGINE-WATTS	CCT	DISTRIBUTION	VOLTAGE	FIXTURE TO DRIVER DISTANCE	CORD	CONTROL OPTIONS	OPTIONS
VAS	Arena Sports Lighting	63L-440 440W, 45,000 lm 84L-660 660W, 60,000 lm 126L-880 880W, 90,000 lm	3K7 3000K, 70 CRI 4K7 4000K, 70 CRI 5K7 5000K, 70 CRI 57K7 5700K, 70 CRI 4K8 4000K, 80 CRI 5K8 5000K, 80 CRI 57K8 5700K, 80 CRI 4K9 4000K, 90 CRI 5K9 5000K, 90 CRI 57K9 5700K, 90 CRI	2 2x2 3 3x3 4 4x4 5 5x5	120 120V 208 208V 240 240V 277 277V 347 347V 480 480V	6C 6' Prewired SEOWA Cord 10C 10' Prewired SEOWA Cord	3C15 3' Prewired SEOWA cord 15A Plug 3C20 3' Prewired SEOWA cord 20A Plug 6C15 6' Prewired SEOWA Cord 15A Plug 6C20 6' Prewired SEOWA Cord 20A Plug 12C15 12' Prewired SEOWA Cord 15A Plug 12C20 12' Prewired SEOWA Cord 15A Plug	CD Continuous dimming SWP SiteSync pre-Comm NXWE NX Fixture Module DMX DMX/RDM	LGC Less Glare Control Single Fuse SF Double Fuse DF Double Fuse GL Glass Lens

ACCESSORIES (ORDER SEPARATELY)

ACCESSORIES	
93093927	Laser Aiming Assembly
93101964	Safety Cable
93096023	Intercept Slip-Fit Adapter
CONTROL ACCESSORIES	
SWUSB*	SiteSync interface software loaded on USB flash drive for use with owner supplied PC (Windows based only). Includes SiteSync license, software and USB radio bridge node
SWTAB*	Windows tablet and SiteSync interface software. Includes tablet with pre loaded software, SiteSync license and USB radio bridge node.
SWBRG	SiteSync USB radio bridge node only. Order if a replacement is required or if an extra bridge node is requested.

* When ordering SiteSync at least one of these two interface options must be ordered per project.

+ If needed, an additional Bridge Node can be ordered.



Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

© 2019 HUBBELL OUTDOOR LIGHTING, All Rights Reserved • For more information visit our website: www.hubbelloutdoor.com • Printed in USA VIP-SPEC May 15, 2019 3:57 PM