

Type: Job: Fixture Catalog number:	Fixture Options:	Approvals: Date: Page: 1 of 2
<div style="display: flex; justify-content: space-between; font-size: small;"> Fixture Mode Finish </div>	Ordered Separately from Fixture See page 2	

Specifications

Housing and Lens Frame: Die-cast brass. Frame with silicone gasket, attaches to housing with four captive 1/4-20 stainless steel, slotted cap screws.

Arm: Cast brass. Head is independently rotatable 360° vertically from top dead center. Head may be positioned straight up. Set screw provided for locking position.

Wall Plate: Die-cast brass. Attaches to stainless steel plate for mounting to any standard electrical outlet box. Internal set screw provided for locking position.

Lens: Tempered clear soda lime glass with silicone gasket. Flush with lens frame to promote water runoff when positioned upward.

Wiring: No. 18AWM rated 105°C.

Finish: Natural Brass (**NB**) and Verde Green Patina (**VG**).

Optical System: A total of 3 or 9 LED emitters configured in a rectangular array comprised together as a module. Available in 3000K, 4200K, and 5100K.

Driver: Universal Voltage from 120 to 277V with a ±10% tolerance. -40°F. starting temperature. All drivers are Underwriters Laboratories recognized.

ORDERING INFORMATION


Fixture	Source
<input type="checkbox"/> AN57 / 3L3KUV¹	5.3W, 3 LED's, 3000K
<input type="checkbox"/> AN57 / 3L4KUV¹	5.3W, 3 LED's, 4200K
<input type="checkbox"/> AN57 / 3L5KUV¹	5.3W, 3 LED's, 5100K

Fixture	Source
<input type="checkbox"/> AN57 / 9L3KUV¹	11.9W, 9 LED's, 3000K
<input type="checkbox"/> AN57 / 9L4KUV¹	11.9W, 9 LED's, 4200K
<input type="checkbox"/> AN57 / 9L5KUV¹	11.9W, 9 LED's, 5100K

¹ Universal Voltage from 120 to 277V with a ±10% tolerance.
 For 5.3W, Max Amps. are .040 for 120V, .030 for 208V, .020 for 240V,
 .020 for 277V. For 11.9W, Max Amps. are .28.

Finish

- ☐ **NB-** Natural Brass
☐ **VG -** Verde Green

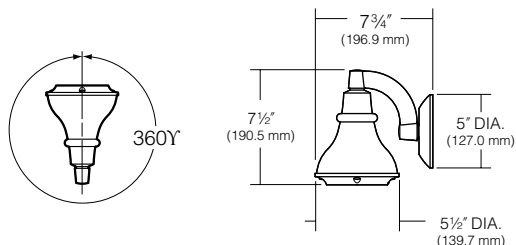

Listings and Ratings		
UL cUL 1598 ¹	IP66 Rated	25C Ambient

¹Suitable for wet locations

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 2



Fixture Options

Ordered Separately from Fixture

Lens Accessories

Cat. No. (See right)

☐ No Option,

HL72 - Hex Cell Louver: Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** Spread or **PL** Prismatic Lenses.

Cat. No.

☐ **HL72** Hex Cell Louver



PL72 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** series Louvers.

Cat. No.

☐ **PL72** Prismatic Lens



SL72 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** series Louvers.

Cat. No.

☐ **SL72** Spread Lens



Type:

Job:

Page: 3 of 3

Lumen Data

Spectroradiometric			
	3000K	4200K	5100K
Correlated Color Temp. CCT (K)	2800 to 3175K	3800 to 4600K	4600 to 5600K
Color Rendering Index (CRI)	≥75	≥70	≥65

ELECTRICAL - Drive Current @350mA (3 LEDs)		
Volts -AC	Amps - AC	System Watts
120	0.04	5.3
208	0.03	5.3
240	0.02	5.3
277	0.02	5.3

ELECTRICAL - Drive Current @350mA (9 LEDs)		
Volts -AC	Amps - AC	System Watts
120	0.28	11.9
208	0.28	11.9
240	0.28	11.9
277	0.28	11.9

Absolute Lumens (3 LEDs)	
Temperature	AN57/3L*K
3000K	199.7
4200K	205.1
5100K	206

Absolute Lumens (9 LEDs)	
Temperature	AN57/9L*K
3000K	618.7
4200K	703.6
5100K	823.9

Lumens Per Watt (3 LEDs)	
Temperature	AN57/3L*K
3000K	37.7
4200K	38.7
5100K	38.9

Lumens Per Watt (9 LEDs)	
Temperature	AN57/9L*K
3000K	52.0
4200K	59.1
5100K	69.2