

Type:

Job:

Fixture Catalog number:

Fixture and Finish

Fixture Options:

Ordered Separately from Fixture
See page 2

Mounting Options:

Ordered Separately from Fixture
See page 3

Date:

Page: 1 of 4

Specifications

Housing and Lens Frame: Die-cast brass. Frame with silicone gasket, attaches to housing with four captive ¼-20 stainless steel, slotted cap screws.

Arm: Cast brass. Head is independently rotatable 300° vertically from top dead center. Head may be positioned straight up. Horizontal rotation of entire fixture controlled by installation on mounting device. Set screw provided for locking position.

Stem: ½" schedule 40 brass pipe with ½" NPT at bottom plus solid brass locknut for mounting.

Lens: Tempered clear soda lime glass with silicone gasket. Flush with lens frame to promote water runoff when positioned upward.

Wiring: 3' No. 18-2 12 Volt cable with fork connectors.

Optical System: A total of 3 LED emitters configured in a rectangular array comprised together as a module. Available in 3000K, 4200K, and 5100K.

Driver: Constant current electronic driver. Available in 12V input. -40°F. starting temperature. All drivers are Underwriters Laboratories recognized.


Finish: Natural Brass (NB) or Verde Green Patina (VG).

Certification: UL Listed to U.S. and Canadian safety standards for wet locations.

ORDERING INFORMATION

Fixture	Source	Finish
<input type="checkbox"/> KLV167/3L3K/NB	5.3W, 3 LED's, 3000K ¹	Natural Brass
<input type="checkbox"/> KLV167/3L4K/NB	5.3W, 3 LED's, 4200K ¹	Natural Brass
<input type="checkbox"/> KLV167/3L5K/NB	5.3W, 3 LED's, 5100K ¹	Natural Brass
<input type="checkbox"/> KLV167/3L3K/VG	5.3W, 3 LED's, 3000K ¹	Verde Green Patina
<input type="checkbox"/> KLV167/3L4K/VG	5.3W, 3 LED's, 4200K ¹	Verde Green Patina
<input type="checkbox"/> KLV167/3L5K/VG	5.3W, 3 LED's, 5100K ¹	Verde Green Patina

¹.44 Max Amps.

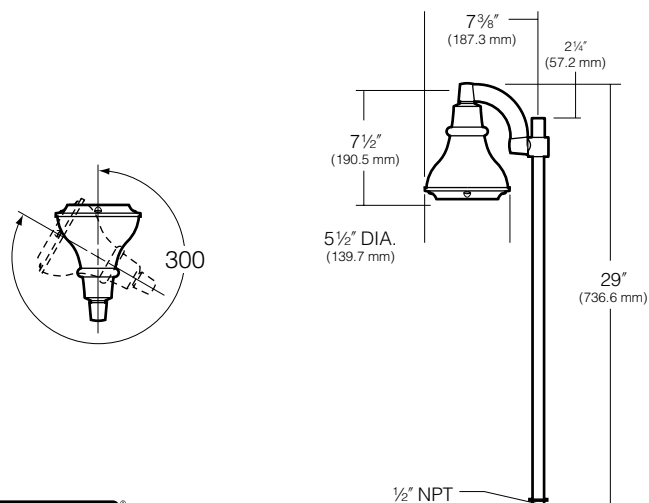

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 4



Fixture Options

Ordered Separately from Fixture

Lens Accessories

Cat. No. (See right)

☐ No Option

HL72 - Hex Cell Louver: Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** spread or **PL** prismatic lenses.

Cat. No.

☐ **HL72** Hex Cell Louver



PL72 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** louver.

Cat. No.

☐ **PL72** Prismatic Lens



SL72 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL** louver.

Cat. No.

☐ **SL72** Spread Lens



Transformer Options

See "12-15 Volt Variable Transformers" on kimlighting.com - Product Specifications - Landscape 12 Volt-120Volt section.

Type:

Job:

Page: 3 of 4



Mounting Options

Ordered Separately from Fixture

Landscape Light Post by Engineered Products Co.


Cat. No.

☐ EP17

☐ No Option

PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion.

17 1/2" post length

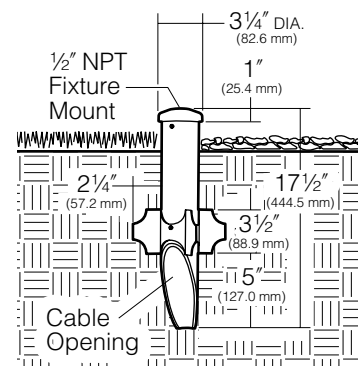

Low Voltage Spear Mount

Cat. No.

Finish

☐ KLV400BL Black

☐ KLV400DB Dark Bronze


☐ KLV400GR Verde Green

☐ No Option

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.

Spear Mounting in Concrete

The KLV400 must be installed in concrete.

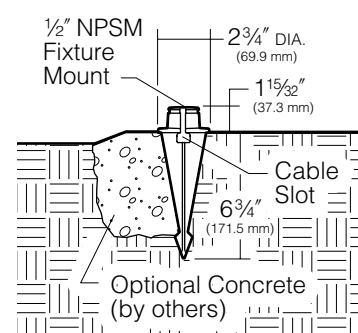

Low Voltage Surface Mount

Cat. No.

Finish


☐ KLV405BL Black

☐ KLV405DB Dark Bronze

☐ KLV405GR Verde Green

☐ No Option

Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Two holes provided for flat head wood screws. TGIC powder coat paint over clear anodizing and titanated zirconium conversion coating.



Extension Module

Cat. No.

Finish


☐ KLV415BL Black

☐ KLV415DB Dark Bronze

☐ KLV415GR Verde Green

☐ No Option

For raising fixtures to a height above foliage for efficient and unobstructed operation. Constructed of 1 5/8" diameter extruded aluminum with die-cast ends. 1/2" NPSM female thread on one end, and other end has a 1/2" NPSM solid brass nipple. Stainless steel allen head set screw locks fixture onto mount. TGIC powder coat paint over titanated zirconium conversion coating. Two modules may be stacked for additional height.

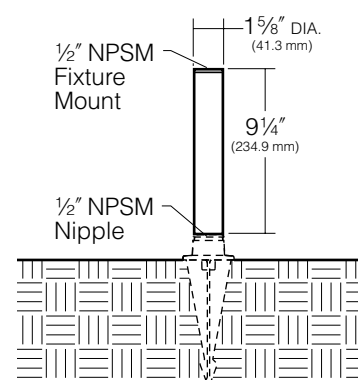

Type:

Job:

Page: 4 of 4



Lumen Data

Spectroradiometric			
	3000K	4200K	5100K
Correlated Color Temp. CCT (K)	2800 to 3175K	3800 to 4600K	4600 to 5600K
Color Rendering Index (CRI)	≥75	≥70	≥65

ELECTRICAL - Drive Current @350mA (3 LEDs)		
Volts	Amps	System Watts
12	0.44	5.3

Absolute Lumens (3 LEDs)	
Temperature	KLV167/3L*K
3000K	199.7
4200K	205.1
5100K	206

Lumens Per Watt (3 LEDs)	
Temperature	KLV167/3L*K
3000K	37.7
4200K	38.7
5100K	38.9