



ANELLO


Housing: Circular aluminum-profile with translucent film. Direct light distribution.
Design: SATTLER

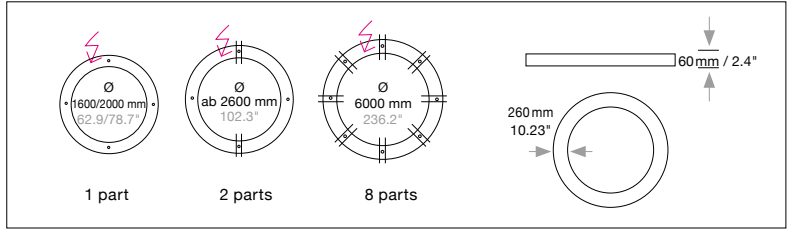


Mounting Version




4/8-point suspension with external power supply unit in suspended ceiling



Up to Ø 2000 mm / 78.7"
4-point suspension with external power supply unit in separate canopy



Up to Ø 2000 mm / 78.7"
suspension through canopy



Up to Ø 2600 mm
Direct ceiling mounting
50mm / 1.9" with external power supply unit in suspended ceiling

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G = Distance of external power supply unit to light fixture max. 10m / 394".

E = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Type	Size mm / inch L W H	For use with Mounting Version
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3	A, G

Dimensions of canopy


Type	Size mm / inch Ø cover plate / body	For use with Mounting Version
DB 500	Ø 510 / 470 mm / 20,0 x 18.5" only up to Ø 2000 mm / 62.9"	B, E

Canopy finish: white (11)
contact factory for other finishes

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation for mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 11 (white)

