

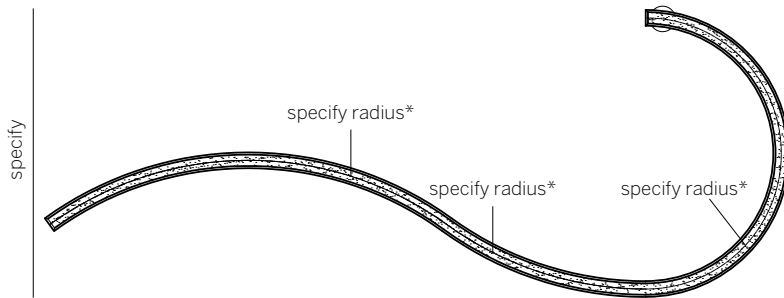



Arc UD

Arc UD is a completely customizable channel designed to provide direct / indirect lighting and a means to suspend luminaires. Open arcs, ellipses and compound curves can be realized to exacting dimensions.



*24" (610mm) minimum specify

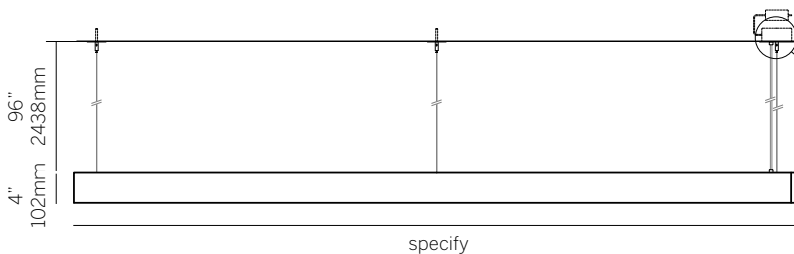

Notes

¹ Separately specify any downlighting elements

² Nominal lumens

³ For no direct or indirect light specify 00

⁴ 82 CRI standard / 90 CRI available

⁵ Canopy finish matches housing

⁶ 96" clear insulated cable standard

Model 1695¹

1695

Type

P Pendant

P

Size

Specify radius _____
Specify length _____

Wattage²

Specify direct and/or indirect light³

Direct

LD 3 W/ft (133lm/W) _____

MD 6 W/ft (124lm/W) _____

HD 10 W/ft (114lm/W) _____

Indirect

LI 3 W/ft (133lm/W) _____

MI 6 W/ft (124lm/W) _____

HI 10 W/ft (114lm/W) _____

Color Temp⁴

827 2700 _____

830 3000 _____

835 3500 _____

840 4000 _____

RGB RGB _____

Voltage

U 120/277 _____

1 120VAC only _____

Control (Remote 24V)

S Non-dim _____

D010 0-10V 10% _____

DFPN Lutron Forward Phase 1% 120VAC _____

L3DAE Lutron Hi-lume 1% EcoSystem _____

L3DOE Lutron Hi-lume Premier 0.1% EcoSystem _____

DMX DMX dimming _____

Diffuser

SW Satin opal acrylic (bottom) **SW**

SA Satin clear acrylic (top) **SA**

Finish⁵

19 Painted anodized aluminum - RAL 9006 matte _____

21 Painted White - RAL 9010 matte _____

26 Painted black - RAL 9005 matte _____


22 Painted custom color _____

Options

CC Clear insulated cable (standard)⁶ _____

WC White cable _____

BC Black cable _____



canopy

