
## Archiline PRO\_I

Project: Type:

### Linear | 9 x powerLEDs 46 W | CRI 80 | 4000K | Spot | Stainless Steel | Drive-over(2645.544 lbs) | Wet location | 120V/277V on/off LL-E81673-N-15



Technical data	
Туре	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	Spot
Light emission direction	upward
Power	46 W
Operation	120V/277V + None interface
Source lumens	5660 lm
сст	4000 K
Color rendering index	80 Ra
Safety class	Class 2
IP	IP67
К	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Driver included	Integral driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2645.54 lbs
Cable included	Yes
Cable length	0.56 ft
Resin potting	No
Type of light emission	Single emission
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Optics technology	Dark light
Product technological characteristics	TVS
Ordinary temperature on the glass	104 °F



Finishing casing	
Material	Aluminum 6060
Color	Anodized Aluminum
Process	20 μm anodizing
Finishing diffuser	
Material	Extra clear glass - Tempered
Color	transparent
Process	Silk-screening
Finishing flange	
Material	AISI 316 steel
Color	steel
Process	Brushing
Cables Electrification	on
Cable connector	Female Socket 3 Pin
IP (locked condition)	68
Cable connector	Male Plug 3 pin

#### Notes:

# Archiline PRO\_I

#### Linear | 9 x powerLEDs 46 W | CRI 80 | 4000K | Spot | Stainless Steel | Drive-over(2645.544 lbs) | Wet location | 120V/277V on/off | Base LL-E81673-N-15

Single emission lines for outdoor application. The natural white LED light source with a spot light distribution is composed of 9 powerled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 5660 lm, with a 123.0 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20  $\mu$ m anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 0 lbs.

The total absorbed power is 51 W. The power supply cable is included and features a 0.558 ft lenght.

and can be floor-mounted with an outer casing, code E99771(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 3 light sources of energy efficiency class E.

Light Output Ratio (LOR)	72 %
Source lumens	5660 lm
Delivered lumens	4093 lm
Power	51 W
Luminaire efficacy	80 lm/W
Color temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Color rendering index	80 Ra
LED Life / Failure Ratio	
L70 B10 C0 247450h (at Tj 60 Ta 25 )	

OPTICAL		
Light distribution symmetry	Symmetrical 2	
C0/C180 optics	23°	

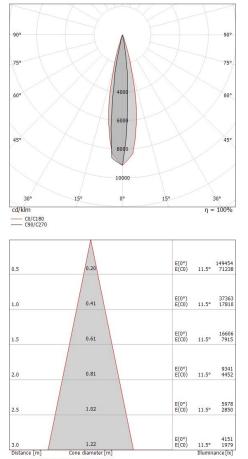

----- C0/C180 (Half-peak divergence: 23.0°)

## Archiline PRO\_I

Archiline PRO\_I | Lines | Accessories LL-E81673-N-15

Cable and connector Length 78.74 in; ; cable gland: no; external diameter: 0.37 in; colors: white - black - blue - green - brown - yellow-green.	<b>Code</b> E99057
Cable and connector Length 196.85 in; ; cable gland: no; external diameter: 0.37 in; colors: white - black - blue - green - brown - yellow-green.	<b>Code</b> E98147
Cable and connector Length 393.7 in; ; cable gland: no; external diameter: 0.37 in; colors: white - black - blue - green - brown - yellow-green.	<b>Code</b> E98146
Outer casing installation position: floor; type of installation: masonry .	<b>Code</b> E99771

Material:Iron, color:zinc, process:Galvanising.