


AVVENI PENDANT 4


Product-information: Aluminum structure with four light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (9 degree beam angle with beam spreaders for 25, 36, and 60 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

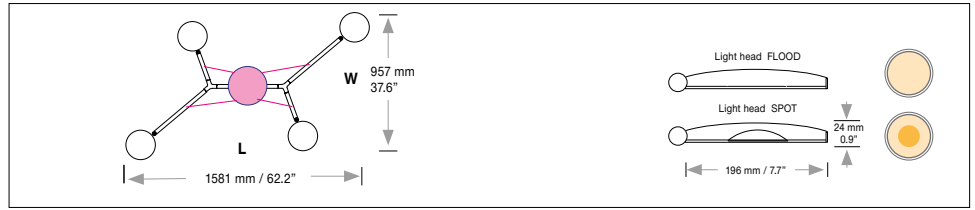


STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight ² kg / lbs	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	L 1581 / W 957	L 62.2 / W 37.6"	max. 76 W	4.0 / 8.8	1210.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 matte white RAL 9003	14 matte black	22 polished aluminum	Standard Optional	XXXX. XXXX.	12. 14. 22.	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.
	Dimmer 0 -10 V CASAMBI Each head switch- and dimmable.				Standard Optional	XXXX. XXXX.	XX. XX.	05. 08.	XX. XX.
	Power Supply Cable power supply cable, silver 196.8" (5000 mm), mounting version (B) without power supply cable, current-carrying suspension 118.1" (3000 mm) (F +R)				Standard Optional	XXXX. XXXX.	XX. XX.	XX. XX.	70. 00.
Mounting Version	B Standard	F	R		XXXX.	XX.	XX.	XX.	0x.
	<p>Suspension with 4 steel cables 196.8" (5000mm) and external power supply unit in separate canopy or suspended ceiling</p> <p>Suspension with canopy and 4 current-carrying steel cables 118.1" (3000mm) Min. suspension height 16" (400mm)</p> <p>Suspension with 4 current-carrying steel cables 118.1" (3000mm) and 4 cavity wall boxes, power supply in suspended ceiling</p>				<p>Order No. STRUCTURE</p> <p>..... 0.</p>				



LIGHT HEAD

Type	Finish 2	Finish 3	LED		Kelvin	Beam angle	XX.	XX.	XX.	XX.			
			XX.	XX.									
							01.	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 matte white RAL 9003	62 matte black	22 Polished Aluminum	Standard Optional Optional	XX. XX. XX.	12. 62. 22.	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.			
	Finish 2 must be the same as finish 1												
	60 silver anodized	61 gold anodized	62 black anodized	Standard Optional Optional	XX. XX. XX.	XX. XX. XX.	60. 61. 62.	XX. XX. XX.	XX. XX. XX.	XX. XX. XX.			
Finish 3 Light head top cover				Standard Optional Optional	XX. XX. XX.	XX. XX. XX.	27. 30. 40.	XX. XX. XX.	XX. XX. XX.				
	LED 36V, CRI >95												
	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K												
Beam Angle	AMBIENT FLOOD HEAD	4 x 17 W 1344' Lumen	Standard	XX.	XX.	XX.	XX.	99.	00.	00.			
	Spot 15.5 W, General Light 3.5 W (see page 2 for SNAP accessories)	SNAP COMPATIBLE HEAD (9° WITHOUT ACCESSORIES)	19 W 1268' Lumen	Optional	XX.	XX.	XX.	XX.	09.	00.			

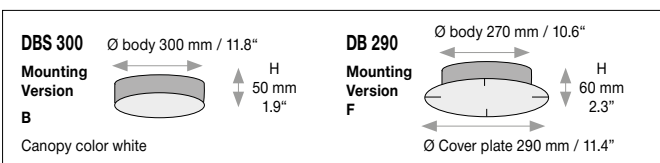

Input voltage for all external power supply units and canopies is 120 - 277 VAC / 50/60 Hz

Quantity	<input type="text"/>	Order No. LIGHT HEAD FLOOD	▶	00.00.
Quantity	<input type="text"/>	Order No. LIGHT HEAD SPOT	▶	00.00.
Quantity	<input type="text"/>	Order No. Accessories (page 2)	▶	00. 00. 00.00.

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20
IP 52

Power supply unit
Lighthouse



Light distribution direct




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

Technical data is subject to change. Errors and omissions excepted *Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. *Weight of lights without remote technical unit or canopy.

SNAP SYSTEM

Snap-on lenses only applicable for AVVENI LIGHT HEAD SPOT.

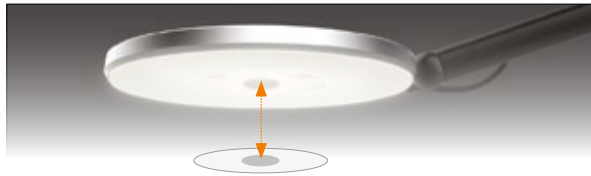

BEAM SPREADERS

Spot-light lenses* magnetic snap-on lenses to change the beam angle

Beam Angle	Beam Shape	Description	Type No.:
17°		Spot	1174. 00. 00. 00. 00
25°		NFL	1163. 00. 00. 00. 00
36°		FL	1164. 00. 00. 00. 00
60°		WFL	1165. 00. 00. 00. 00
13°		Spot asymmetrical 0-20°, consisting of 2 lenses	1177. 00. 00. 00. 00

Elliptical lens* magnetic snap-on lenses for asymmetrical light beam

10-36°		Ellipse*	1166. 00. 00. 00. 00
10-60°		Ellipse*	1175. 00. 00. 00. 00

Square lens* magnetic snap-on lenses for square light beam

36°-36°		Square*	1176. 00. 00. 00. 00
---------	--	---------	----------------------

*approx. 10% reduction of the lumen output

LIGHT COLOR LENSES

Color temperatur lenses* magnetic snap-on lenses that shift color temperature

Starting light color KELVIN (K)	2700	3000	4000	
CTO 1/4	2450	2700	3500	1160. 00. 00. 00. 00
CTO 1/2	2200	2400	3000	1161. 00. 00. 00. 00
CTO 3/4	2000	2200	2700	1162. 00. 00. 00. 00

*reduction of the lumen output : CTO 1/4 = 10%, CTO 1/2 = 25%, CTO 3/4 = 40%

ANTI GLARE PROTECTION

Louver snap - magnetic snap-on adaptor to eliminate high angle glare




1167. 00. 00. 00. 00

LENS SETS

Complete set:	3 x spot-light lenses 25°, 36°, 60°, 1 x elliptical lens 10-36°, 3 x light color lenses, 1 x louver	1171. 00. 00. 00. 00
Beam Angle Set:	3 x spot-light lenses 25°, 36°, 60°	1172. 00. 00. 00. 00
Light Color Set:	3 x light color lenses CTO 1/4, CTO 1/2, CTO 3/4	1173. 00. 00. 00. 00

Combinations of up to three lenses are possible

Ceiling Fixation



Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover.
Applicable to mounting version B. **white**

200. 00. 00. 00. 11