
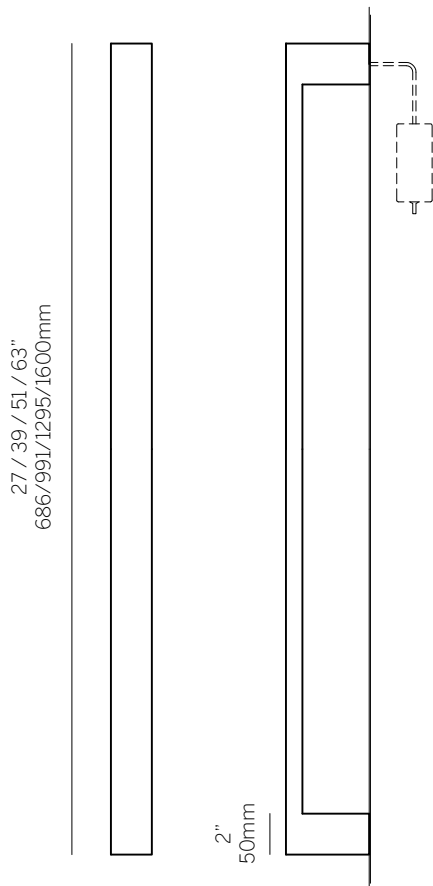


City Indoor

The simple clean lines of the fixture are an ideal solution for interior architectural surfaces. Wall mounted, vertically or horizontally oriented with indirect LED lighting.



inter•lux

Model 1825 **1825**

Type
W Wall **W**

Size
27 27"
39 39"
51 51"
63 63"
Custom

Wattage¹

27"
L 6W (733lm)
M 11W (1362lm)
H 19W (2152lm)

39"
L 9W (1133lm)
M 17W (2105lm)
H 29W (3326lm)

51"
L 12W (1533lm)
M 23W (2848lm)
H 39W (4500lm)

63"
L 15W (1933lm)
M 29W (3591lm)
H 49W (5674lm)

Color Temp²

827 2700
830 3000
835 3500
840 4000

Voltage

U 120/277
I 120VAC only

Control (Remote 24V)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1%
120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1%
EcoSystem

Diffuser
SA Satin clear acrylic **SA**

Finish

19 Painted anodized aluminum -
RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

¹Nominal lumens
²82 CRI standard / 90 CRI available

For up to date technical information, refer to inter-lux.com/alm



inter-lux.com/alm