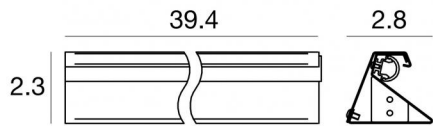


Linear | Modular Slave | Steel
E64648



Technical data	
Designer	Studio RIGO
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Safety class	Class 2
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	5.95 lbs
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	AISI 316L steel
Color	steel
Process	Satin finishing


Finishing diffuser	
Material	UV Resistant Polymethylmethacrylate
Color	opaline


Notes:



Linear | Modular Slave | Steel
E64648

Components

			Code
		silicone_c - LED Strip topLED 72 W DC CRI 80 3000K Transparent Wet location 24V	<u>E62403</u>

			Code
		silicone_c - LED Strip topLED 72 W DC CRI 80 4000K General Lighting Transparent Wet location 24V	<u>E62403N</u>



Dirigo_M1 Stainless Steel SLAVE | Lines | Accessories
E64648



Cable and connector - Connection cable - Feed cable with Male connector
Length 39.37 in; insulation double; ; cable gland: no; colors: black - red.

Code
E89629



Cable and connector - Extension cable with Female connector
Length 78.74 in; insulation double; ; cable gland: no; colors: black - red.

Code
E99000



Closing cap
Material:AISI 316L steel, color:steel, process:Satin finishing.

Code
E64592



Cable junction
Material:AISI 316L steel, color:steel, process:Satin finishing.

Code
E64593