




Downlights | 1 x 5mmLED 0.5 W | CRI 75 | 3500K | General Lighting | Chrome | Dry location
 | 24V



LL-E87337-T-00

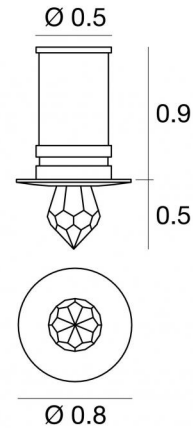

Technical data	
Type	Semi-recessed
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Power	0.5 W
Operation	24V
Voltage	24V
CCT	3500 K
Color rendering index	75 Ra
Safety class	Class 2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.39 ft
Resin potting	No
Type of light emission	Single emission
Net weight	0.03 lbs
Electrostatic discharge protection	No
Surge protection	No
Ordinary temperature on the glass	104 °F

Finishing casing	
Material	Brass
Color	chrome
Process	Electroplating

Finishing diffuser	
Material	Glass
Color	transparent

Notes:



Downlights | 1 x 5mmLED 0.5 W | CRI 75 | 3500K | General Lighting | Chrome | Dry location
| 24V

LL-E87337-T-00

Single emission downlights for indoor application. The 3500 LED light source with a general lighting light distribution is composed of 1 5mmled LEDs with CCT of 3500 K and a CRI 75.

The device body is made of brass and features a chrome finish, processed by means of electroplating; the diffuser is made of glass. The ingress protection degree is IP20; the total weight is of 0.033 lbs.

The total absorbed power is 0.5 W. The power supply cable is included and features a 0.394 ft lenght.

and can be ceiling-mounted, with a 0.591 in diameter hole (in plasterboard) with an outer casing, code E84916(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Led features	
Color temperature	3500 K
Color rendering index	75 Ra



Outer casing - White

Type of installation: masonry L=1.38in, H=0.79in, D=0.79in

Code

E84335



Outer casing - Brass

installation position: floor; type of installation: masonry L=1.89in,
H=2.36in, D=2.36in.

Material:ABS, color:black.

Code

E84916