




Wall Lights | 1 x powerLED 1.0 W | CRI 80 | 3500K | Radial 180° | Embossed white RAL 9003 | Dry location | 350mA
LL-E96966-T-18



1.1

| Technical data | |
|--|-----------------------|
| Type | Semi-recessed |
| Installation position | Wall lights - Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Optics | Radial |
| Light emission direction | downward |
| Power | 1 W |
| Operation | 350mA |
| Source lumens | 145 lm |
| CCT | 3500 K |
| Color rendering index | 80 Ra |
| Safety class | Class 2 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | Yes |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 0.39 ft |
| Resin potting | Yes |
| Type of light emission | Multiple emission |
| Net weight | 0.09 lbs |
| Electrostatic discharge protection | No |
| Surge protection | No |
| Product technological characteristics | TVS |
| Ordinary temperature on the glass | 104 °F |

| Finishing casing | |
|------------------|-------------------------|
| Material | Aluminum 6026 |
| Color | Embossed white RAL 9003 |
| Process | Powder coating |

| Cables Electrification | |
|------------------------|----|
| Cable connector | No |

Notes:



Wall Lights | 1 x powerLED 1.0 W | CRI 80 | 3500K | Radial 180° | Embossed white RAL 9003 | Dry location | 350mA
LL-E96966-T-18

Multiple emission wall lights for indoor application. The 3500 LED light source with a radial light distribution is composed of 1 powered LEDs with CCT of 3500 K and a CRI 80; the source luminous flux is 145 lm, with a 145.0 lm/W nominal luminous efficacy.

The device body is made of aluminium 6026 and features a embossed white ral 9003 finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 0.088 lbs.

The total absorbed power is 1 W. The power supply cable is included and features a 0.394 ft lenght.

and can be wall lights or ceiling-mounted, with a 1.142 in diameter hole (in plasterboard) with an outer casing, code E84915(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.



Led features

| | |
|---------------------------------------|---------------|
| Source lumens | 145 lm |
| Color temperature | 3500 K |
| Standard Deviation of Colour Matching | 1/16 ANSI BIN |
| Color rendering index | 80 Ra |
| Black Body Locus | On |

LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25)

COLOR VECTOR GRAPHIC

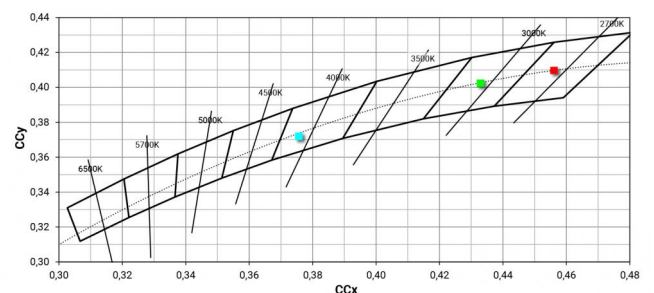



Envelope_4 | Wall Lights | Accessories
LL-E96966-T-18



Outer casing - White
Type of installation: masonry L=1.65in, H=1.38in, D=1.38in

Code
E84336



Outer casing - nickel
Type of installation: masonry L=1.93in, H=2.36in, D=2.36in

Code
E84915