



Envelope_W Wall-Recessed

Project: _____
 Type: _____

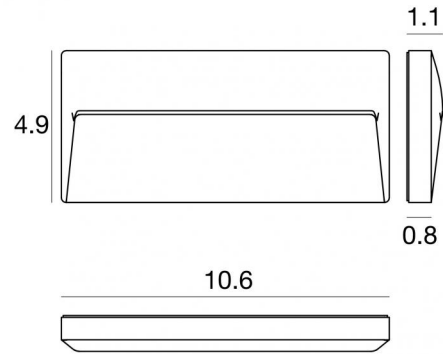

Wall Lights | topLED 9.5 W | CRI 80 | 4000K | Asymmetric Wallwasher | Gray RAL 9006 |
 Wet location | 24V
LL-E81294-N-07

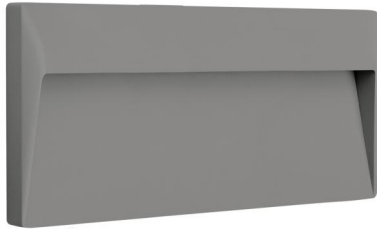

Technical data

Type	Encasement without flange
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Optics	Asymmetric Wallwasher
Light emission direction	downward
Power	9.5 W
Operation	24V
Source lumens	1207 lm
Voltage	24V
CCT	4000 K
Color rendering index	80 Ra
Safety class	Class 2
IP	IP65
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.98 ft
Resin potting	Yes
Type of light emission	Single emission
Net weight	2.2 lbs
Electrostatic discharge protection	4 KV
Surge protection	0,5 KV
Product technological characteristics	Acquastop
Ordinary temperature on the glass	104 °F

Finishing casing

Material	Die-cast Aluminum EN AB - 46100
Color	Gray RAL 9006
Process	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Color	transparent
Process	Silk-screening

Cables Electrification

Cable connector	No
-----------------	----

Notes:

Envelope_W Wall-Recessed



Wall Lights | topLED 9.5 W | CRI 80 | 4000K | Asymmetric Wallwasher | Gray RAL 9006 |
 Wet location | 24V | Base
LL-E81294-N-07

Single emission wall lights for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 30 topped LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1207 lm, with a 127.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a grey ral 9006 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 2.205 lbs.

The total absorbed power is 9.5 W. The power supply cable is included and features a 0.984 ft lenght.

and can be wall lights-mounted with an outer casing, code E99745(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

Led features


Light Output Ratio (LOR)	48 %
Source lumens	1207 lm
Delivered lumens	587 lm
Power	9.5 W
Luminaire efficacy	61 lm/W
Color temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Color rendering index	80 Ra

LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25)

OPTICAL

Light distribution symmetry	Symmetrical 2
C0/C180 optics	121°

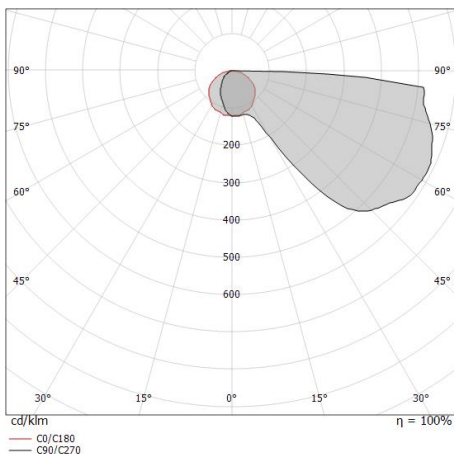


Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.77	E(0°) 284 E(C0) 17
1.0	3.55	E(0°) 71 E(C0) 4
1.5	5.32	E(0°) 32 E(C0) 2
2.0	7.10	E(0°) 18 E(C0) 1
2.5	8.87	E(0°) 11 E(C0) 1
3.0	10.65	E(0°) 8 E(C0) 0

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0/C180 (Half-peak divergence: 121.2°)



Envelope_W Wall-Recessed | Wall Lights | Accessories

LL-E81294-N-07



Outer casing

installation position: wall lights; type of installation: masonry

L=11.06in, H=5.31in, D=1.67in

Code

E99745