


Wall Lights | topLED 6 W | CRI 80 | 4000K | Asymmetric Wallwasher | Anthracite RAL 7021 |
Wet location | 24V

LL-E81290-N-07

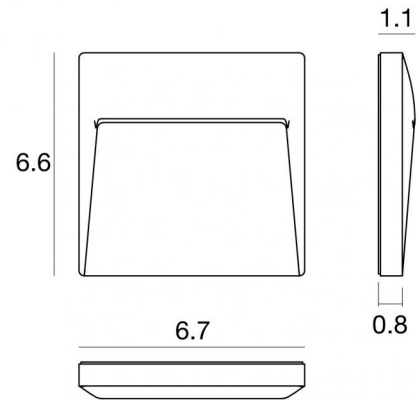

Technical data	
Type	Encasement without flange
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Optics	Asymmetric Wallwasher
Light emission direction	downward
Power	6 W
Operation	24V
Source lumens	724 lm
Voltage	24V
CCT	4000 K
Color rendering index	80 Ra
Safety class	Class 2
IP	IP65
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.98 ft
Resin potting	Yes
Type of light emission	Single emission
Net weight	1.87 lbs
Electrostatic discharge protection	4 KV
Surge protection	4 KV
Product technological characteristics	Acquastop
Ordinary temperature on the glass	104 °F

Finishing casing	
Material	Die-cast Aluminum EN AB - 46100
Color	Anthracite RAL 7021
Process	Open pore anodizing + Powder Coating

Finishing diffuser	
Material	Extra clear glass - Tempered
Color	transparent
Process	Silk-screening

Cables Electrification	
Cable connector	No

Notes:

Envelope_W Wall-Recessed



Wall Lights | topLED 6 W | CRI 80 | 4000K | Asymmetric Wallwasher | Anthracite RAL 7021 | Wet location | 24V | Base
LL-E81290-N-07

Single emission wall lights for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 18 topped LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 724 lm, with a 120.7 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a grey ral 7021 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 1.874 lbs.

The total absorbed power is 6 W. The power supply cable is included and features a 0.984 ft lenght.

and can be wall lights-mounted with an outer casing, code E99744(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

Led features


Light Output Ratio (LOR)	42 %
Source lumens	724 lm
Delivered lumens	308 lm
Power	6 W
Luminaire efficacy	51 lm/W
Color temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Color rendering index	80 Ra

LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25)


OPTICAL

Light distribution symmetry	Symmetrical 2
C0/C180 optics	125°

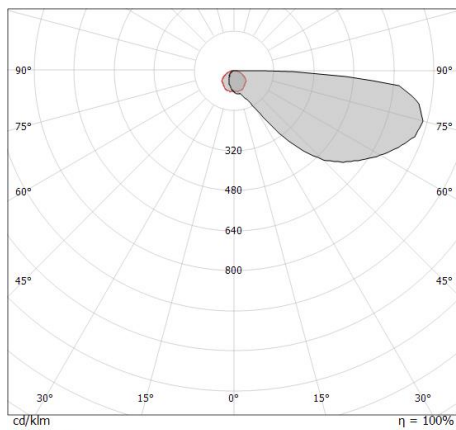

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.94	$\frac{E(0^\circ)}{E(C0)} 62.7^\circ$ 1035
1.0	3.87	$\frac{E(0^\circ)}{E(C0)} 62.7^\circ$ 261
1.5	5.81	$\frac{E(0^\circ)}{E(C0)} 62.7^\circ$ 111
2.0	7.75	$\frac{E(0^\circ)}{E(C0)} 62.7^\circ$ 60
2.5	9.69	$\frac{E(0^\circ)}{E(C0)} 62.7^\circ$ 40
3.0	11.62	$\frac{E(0^\circ)}{E(C0)} 62.7^\circ$ 30

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0/C180 (Half-peak divergence: 125.4°)



Outer casing

installation position: wall lights; type of installation: masonry

L=7.13in, H=7.05in, D=2.07in

Code

E99744