Eyelet65_	Q
-----------	---


Project:

Type:

Projectors | 1 x powerLED 2.0 W | CRI 80 | 2700K | Flood | Embossed white RAL 9003 | Damp location | 630mA LL-E97336-M-30



Technical data	
Туре	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Indoor
Light Source	LED
Optics	Flood
Light emission direction	frontal
Power	2 W
Operation	630mA
Source lumens	219 lm
ССТ	2700 K
Color rendering index	80 Ra
Safety class	Class 2
IP	IP40
IK	IK03
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	180 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	3.28 ft
Resin potting	No
Type of light emission	Single emission
Net weight	0.4 lbs
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	TVS
Ordinary temperature on the glass	104 °F



Finishing casing	
Material	Aluminum 6026
Color	Embossed white RAL 9003
Process	Powder coating
Finishing bracket	
Material	Aluminum 5754
Color	Anodized Black
Process	15 µm Anodizing
Cables Electrifica	tion
Cable connector	No

## Notes:

## Projectors | 1 x powerLED 2.0 W | CRI 80 | 2700K | Flood | Embossed white RAL 9003 | Damp location | 630mA | Base LL-E97336-M-30

Single emission projectors for indoor application. The super warm LED light source with a flood light distribution is composed of 1 powerled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 219 Im, with a 109.5 Im/W nominal luminous efficacy.

The device body is made of aluminium 6026 and features a embossed white ral 9003 finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.397 lbs.

The total absorbed power is 2 W. The power supply cable is included and features a 3.281 ft lenght.

and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains a light source of energy efficiency class D.

Led features	
ight Output Ratio (LOR)	78 %
Source lumens	219 lm
Delivered lumens	172 lm
Power	2,0 W
uminaire efficacy	86 lm/W
Color temperature	2700 K
Standard Deviation of Colour Matching	1.5 Step
Color rendering index	80 Ra
LED Life / Failure Ratio	
.70 B10 C0 361980h (at Tj 60 Ta 25 )	

24.7
24.7
S=0.25H
70/50/20

OP	TIC	Δ1
•••		

••••••	
Light distribution symmetry	Symmetrical
C0/C180 optics	27°

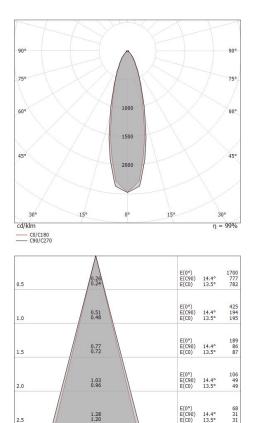

E(0°) E(C90) E(C0) 1.54 1.44 3.0 Distance [m] Cone diameter [m

47 22 22

14.4° 13.5°

C0/C180 (Half-peak divergence: 27.0°) C90/C270 (Half-peak divergence: 28.8°)

2.5