


FINO SPOT

Housing: Spotlight, aluminum housing
Design: Ulrich Sattler | Michael Schmidt, Code2design

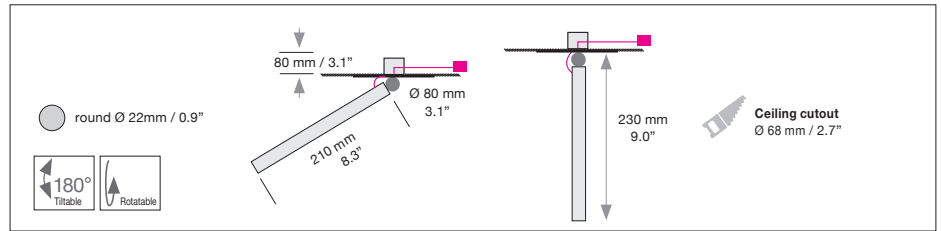

	Size: Ø mm	Inches	LED Watt	Lumen ¹	Weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
SIZE	Ø 22 / L 210	Ø 0.9 / L 8.3"	4	510	0.4 / 0.88	1538.	x x .	x x .	x x .	x x .	x x x .	x	
LED			Warm-white	3000 K	(Standard)	x x x .	30.	x x .	x x .	x x .	x x x .	x	
CRI > 90			Neutral-white	4000 K	(Optional)	x x x .	40.	x x .	x x .	x x .	x x x .	x	
			Extra warm-white	2700 K	(Optional)	x x x .	27.	x x .	x x .	x x .	x x x .	x	
Dimming			Without Dimmer		(Standard)	x x x .	x x .	01.	00.	x x .	x x x .	x	
Finishes		(Optional)					x x x .	x x .	x x .	x x .	. .	x x x .	x
(Standard)	66 brushed anodized bronze		12 matte white RAL 9003	22 polished aluminum	62 brushed anodized black	65 brushed anodized champ. gold							
	Consult factory for custom finishes												
Power Supply Cable			Z 80 Black matt				x x x .	x x .	x x .	x x .	x x .	Z80.	
Mounting Version		U					x x x .	x x .	x x .	x x .	x x .	U	
	Ball-joint surface mount with remote mounted driver, DA80 canopy, 2000 mm / 78.7" power supply cable												

Dimensions of canopy

Type Size mm / inch

DA 80 **Mounting version U, Ceiling cutout Ø 68 mm / 2.7"**

Cover Ø 80 mm 3.1"

installation depth 80 mm / 3.1"

Color same as spot

▶

1538.	x x .	01.	00.	x x .	Z80.	U
--------------	-------	------------	------------	-------	-------------	----------

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**