
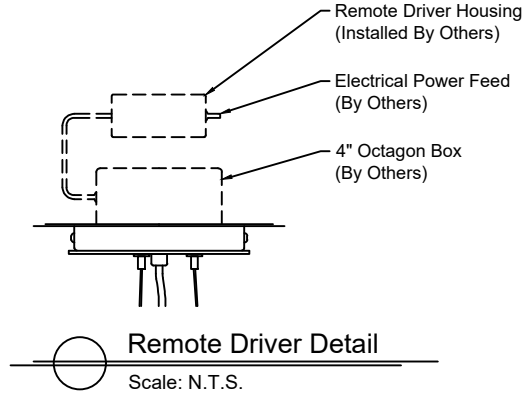




# Gran Fuse

## TECHNICAL SHEET

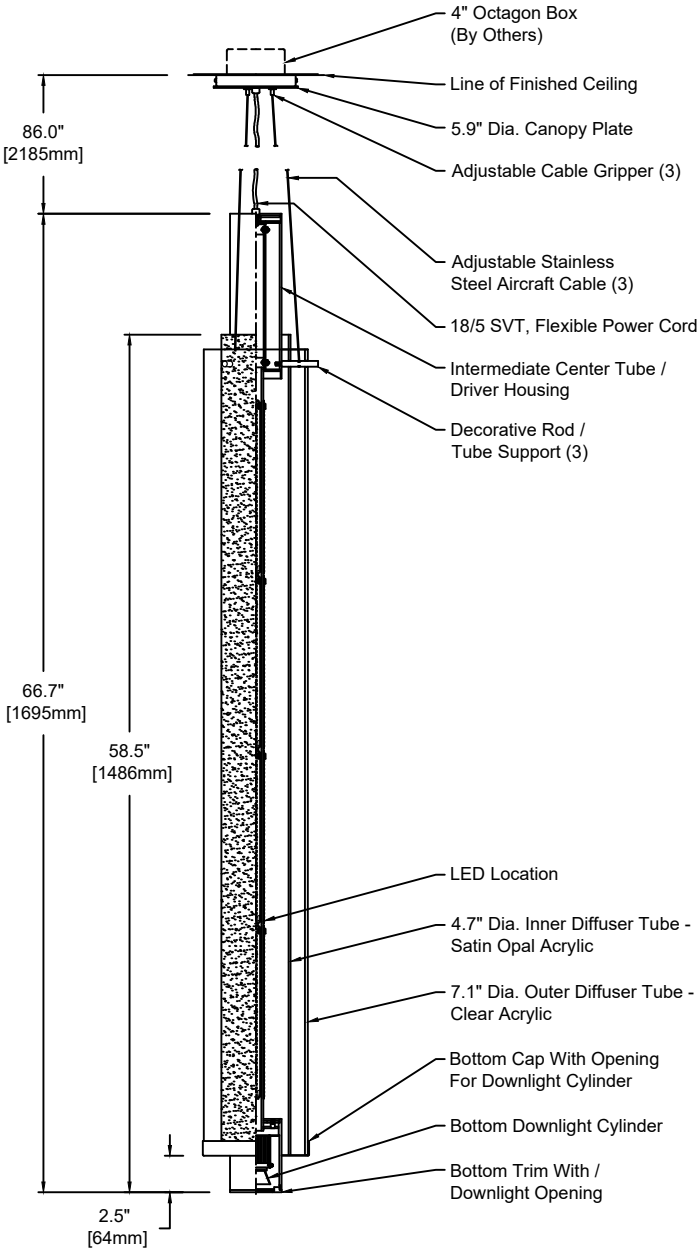

Note:  
Canopy finish matches housing

### PERSPECTIVE VIEW

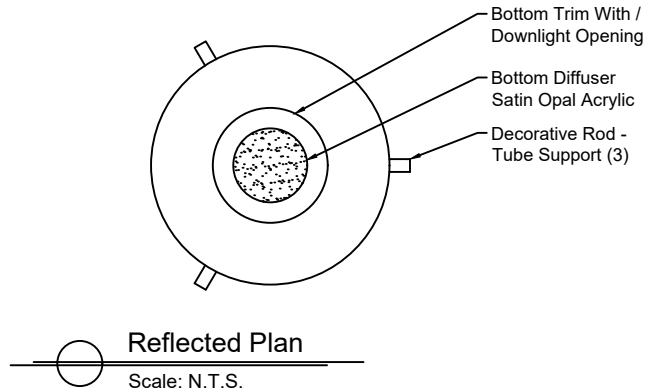

Fixture Weight : 20 lbs

Model	Type	Size	Wattage General	Color Temp	Wattage Downlight	Color Temp	Voltage	Control General	Control Downlight	Diffuser	Finish	Options
1575	P	67	L	830	H	830	U	S	S	AA - SW	12	CL - CC
P - Pendant	67"	L	827 830 835 840	M H	827 830 835 840	1 - 120 VAC only U - 120/277 V	S D010 DFPN L3DAE L3DOE	S D010 ECO30W DFPN PEQ1 PEQ0	AA - Clear Acrylic SW - Satin Opal Acrylic	12 - Satin Nickel 19 - Painted Anodized Aluminum - RAL 9006 - Matte 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color	CL - Extended Cylinder Light CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable	

#### Wattage and Control

<p>Control for General Light (Integral 24V): S - Non-Dim D010 - 0-10V 10%</p> <p>Control (Remote 24V): DFPN - Lutron Forward Phase 1%, 120VAC L3DAE - Lutron Hi-Lume 1% EcoSystem L3DOE - Lutron Hi-Lume Premier 0.1% EcoSystem</p>	<p>Wattage "L" - 48 Watt 2,700K - 6,400 lm 3,000K - 6,400 lm 3,500K - 6,656 lm 4,000K - 6,784 lm</p> <p>Technical Data: Form - linear, Operating voltage: 24VDC Color rendering index Ra min: 82 CRI Available in 90 CRI Viewing angle: 110° Lifetime - L70: 60,000h</p> <p>Working temperature: -20°C to 60°C (-4°F to 140°F)</p>	<p>Remote Drivers: Max. wiring distance / Load Lutron</p> <table border="1"> <tr> <th>Wire Gauge</th> <th>≤40W</th> <th>≤96W</th> </tr> <tr> <td>#18AWG</td> <td>15'</td> <td>25'</td> </tr> <tr> <td>#16AWG</td> <td>25'</td> <td>40'</td> </tr> <tr> <td>#14AWG</td> <td>40'</td> <td>60'</td> </tr> </table>	Wire Gauge	≤40W	≤96W	#18AWG	15'	25'	#16AWG	25'	40'	#14AWG	40'	60'	<p>Control (Integral, Constant Current): S - Non-Dim D010 - 0-10V 10% PEQ1 - Lutron Hi-Lume 1% EcoSystem PEQ0 - Lutron Hi-Lume Premier 0.1% EcoSystem</p> <p>Control (Remote, Constant Current): ECO30W - EldoLED 0-10V 1% DFPN - Lutron Forward Phase 1%, 120VAC</p> <p>Remote Drivers: Max. wiring distance / Load Wire Gauge EldoLED Lutron</p> <table border="1"> <tr> <th>Wire Gauge</th> <th>EldoLED</th> <th>Lutron</th> </tr> <tr> <td>#18AWG</td> <td>72'</td> <td>30'</td> </tr> <tr> <td>#16AWG</td> <td>118'</td> <td>35'</td> </tr> <tr> <td>#14AWG</td> <td>150'</td> <td>50'</td> </tr> </table>	Wire Gauge	EldoLED	Lutron	#18AWG	72'	30'	#16AWG	118'	35'	#14AWG	150'	50'	<p>Wattage "M" - 8.4 Watt / 1,311 lm Wattage "H" - 12.6 Watt / 1,710 lm</p> <p>Technical Data: Color rendering index Ra min: 80 CRI Available in 90 CRI Reflector angle: 80°</p> <p>Power and Voltage: 8.4 Watt / 18V / 500mA 12.6 Watt / 18V / 700mA</p>
Wire Gauge	≤40W	≤96W																										
#18AWG	15'	25'																										
#16AWG	25'	40'																										
#14AWG	40'	60'																										
Wire Gauge	EldoLED	Lutron																										
#18AWG	72'	30'																										
#16AWG	118'	35'																										
#14AWG	150'	50'																										

