

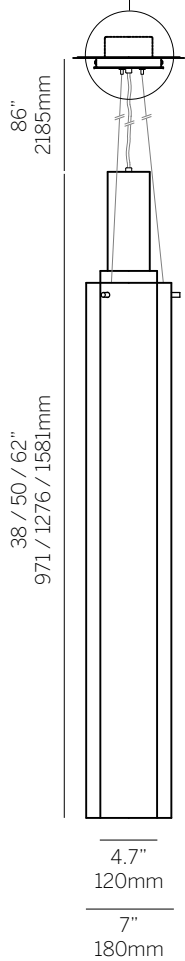


## Gran Fuse


A suspended luminaire for large scale spaces, the Gran Fuse has multiple performance options and a classic form.

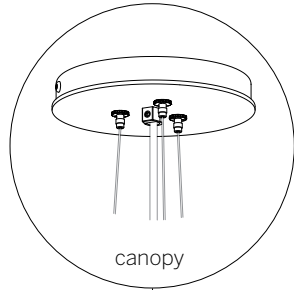

Standard

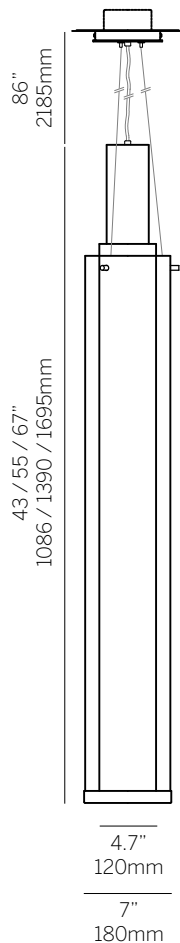

Flush downlight

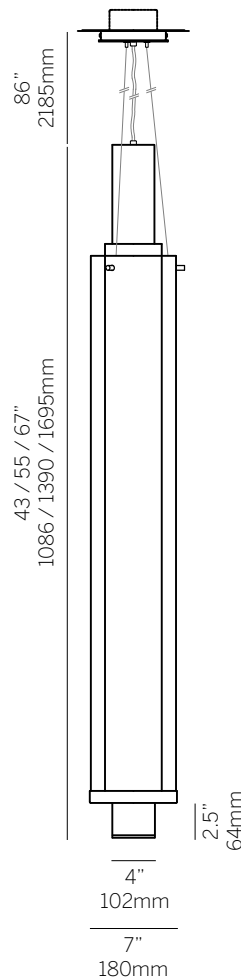

Cylinder downlight

### Notes

- <sup>1</sup>Nominal lumens
- <sup>2</sup>82 CRI standard / 90 CRI available
- <sup>3</sup>Canopy finish matches housing
- <sup>4</sup>96" clear insulated cable standard

Model 1575

1575

### Type

P Pendant

P

### Size

38" 38"  
43" 43"  
50" 50"  
55" 55"  
62" 62"  
67" 67"

Custom (up to 74" standard, 79" downlight)

### Wattage<sup>1</sup>

General Light

38 / 43" L 24W (3200lm)  
50 / 55" L 36W (4800lm)  
62 / 67" L 48W (6400lm)

Downlight

M 8.4W (1,311lm) @ 500 mA  
H 18.2W (3100lm) @ 700mA

### Color Temp<sup>2</sup>

827 2700  
830 3000  
835 3500  
840 4000  
RGB RGB  
RGBW RGBW

### Voltage

U 120/277  
I 120VAC only

### Control (General / 24V)

S Non-dim (Integral)  
D010 0-10V 10% (Integral)  
DFPN Lutron Forward Phase 1% 120VAC (Remote)  
L3DAE Lutron Hi-lume 1% EcoSystem (Remote)  
L3D0E Lutron Hi-lume Premier 0.1% EcoSystem (Remote)

### Control (Downlight / Constant Current)

S Non-dim (Integral)  
D010 0-10V 10% (Integral)  
ECO30W EidoLED 0-10V 1% (Remote)  
DFPN Lutron Forward Phase 1% 120VAC (Remote)  
PEQ1 Lutron Hi-lume 1% EcoSystem (Integral)  
PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (Integral)

### Diffuser

AA Clear acrylic  
SW Satin opal acrylic

AA  
SW

### Finish<sup>3</sup>

12 Satin nickel  
19 Painted anodized aluminum - RAL 9006 Matte  
21 Painted white - RAL 9010 matte  
22 Painted custom color

### Options

D Flush downlight  
CL Extended cylinder light  
CC Clear insulated cable (standard)<sup>4</sup>  
WC White cable  
BC Black cable

