


# Plume

## TECHNICAL SHEET

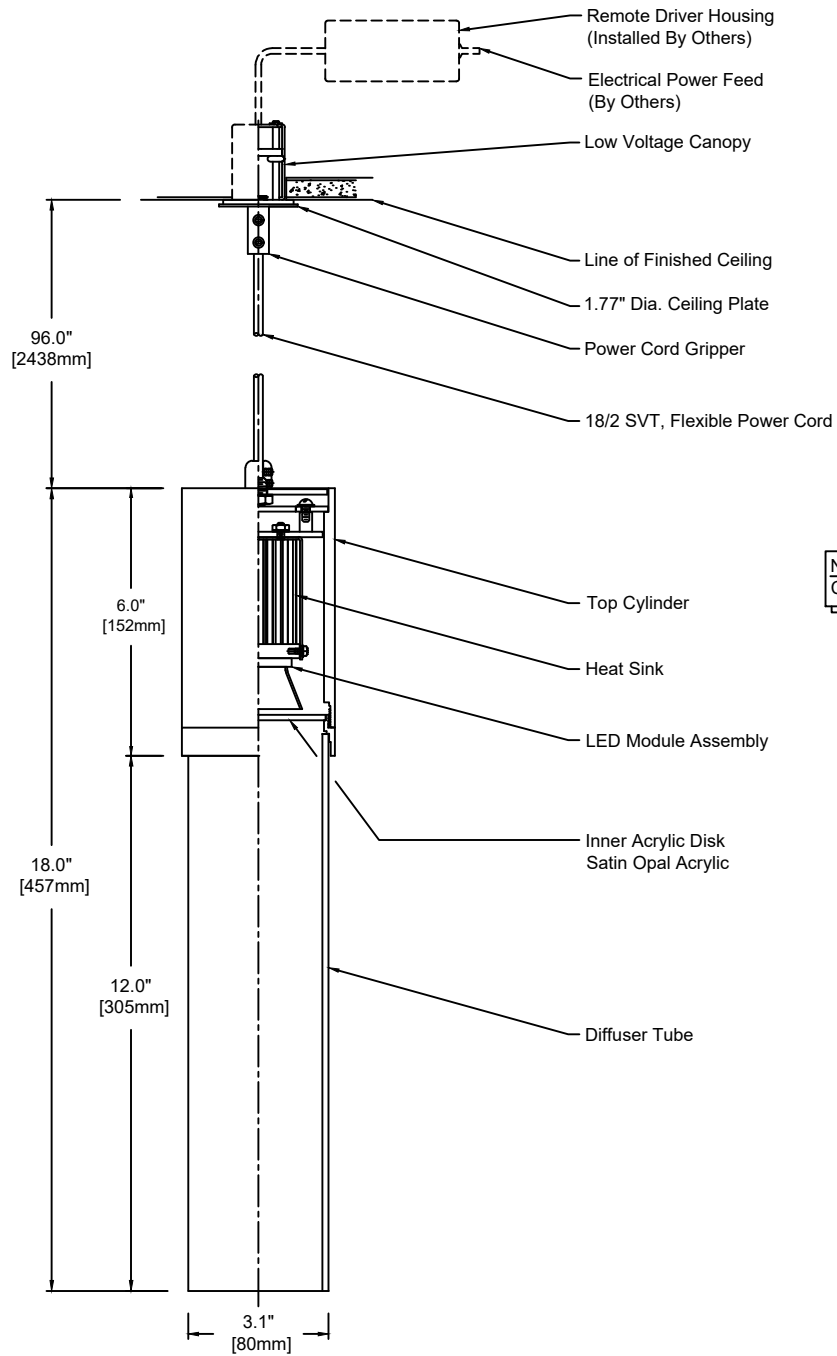

**PERSPECTIVE VIEW**

Note:  
Canopy finish matches housing

**Fixture Weight : 7 lbs**

1560	P	18	H	830	U	S	WA	12	RD - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
P - Pendant	18"	M	827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 EC030W DFPN PEQ1 PEQ0	WA - White Opal Acrylic WG - White Opal Glass	10 - Satin Stainless Steel 12 - Satin Nickel 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color	RD - Remote Driver CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable	

**Wattage and Control**

Control (Constant Current, Remote):  
S - Non-Dim  
D010 - 0-10V 10%  
ECO30W - EldoLED 0-10V 1%  
DFPN - Lutron Forward Phase 1%, 120VAC  
PEQ1 - Lutron Hi-Lume 1% EcoSystem  
PEQ0 - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "M" - 8.4 Watt / 1,311 lm  
Wattage "H" - 12.6 Watt / 1,710 lm

Technical Data:  
Color rendering index Ra min: 80 CRI, Available in 90 CRI  
Reflector angle: 15°

Power and Voltage:  
8.4 Watt / 18V / 500mA  
12.6 Watt / 18V / 700mA

Remote Drivers:  
Max. wiring distance / Load

Wire Gauge	Hatch	Lutron	EldoLED
#18AWG	50'	30'	72'
#16AWG	80'	35'	118'
#14AWG	126'	50'	150'

