



# Plume

## TECHNICAL SHEET

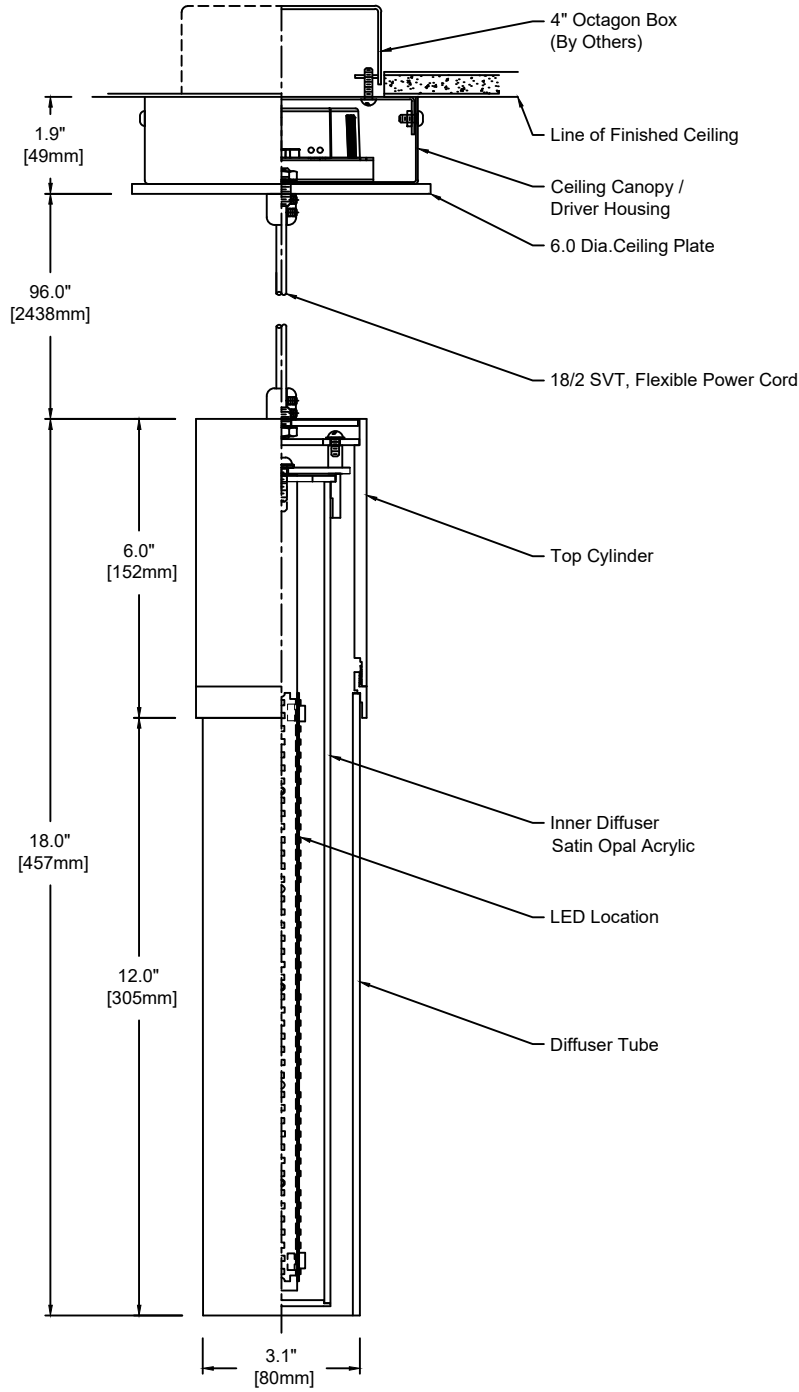

PERSPECTIVE VIEW

Note:  
Canopy finish matches housing

Fixture Weight :9 lbs

1560	P	18	L	830	U	S	WA	12	ID - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
P - Pendant	18"	L	827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 DFPN L3DAE	WA - White Opal Acrylic WG - White Opal Glass	10 - Satin Stainless Steel 12 - Satin Nickel 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color	ID - Integral Driver CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable	

**Wattage and Control**

Control (Integral):  
S - Non-Dim  
D010 - 0-10V 10%  
DFPN - Lutron Forward Phase 1%, 120VAC  
L3DAE - Lutron Hi-Lume 1% EcoSystem

Wattage "L" - 12 Watt  
2,700K - 1,600 lm  
3,000K - 1,600 lm  
3,500K - 1,664 lm  
4,000K - 1,696 lm

Technical Data:  
Form - linear, Operating voltage: 24VDC  
Color rendering index Ra min: 82 CRI, Available in 90 CRI  
Viewing angle: 110°  
Lifetime - L70: 60,000h  
Working temperature: -20°C to 60°C (-4°F to 140°F)

