


# Plume

## TECHNICAL SHEET

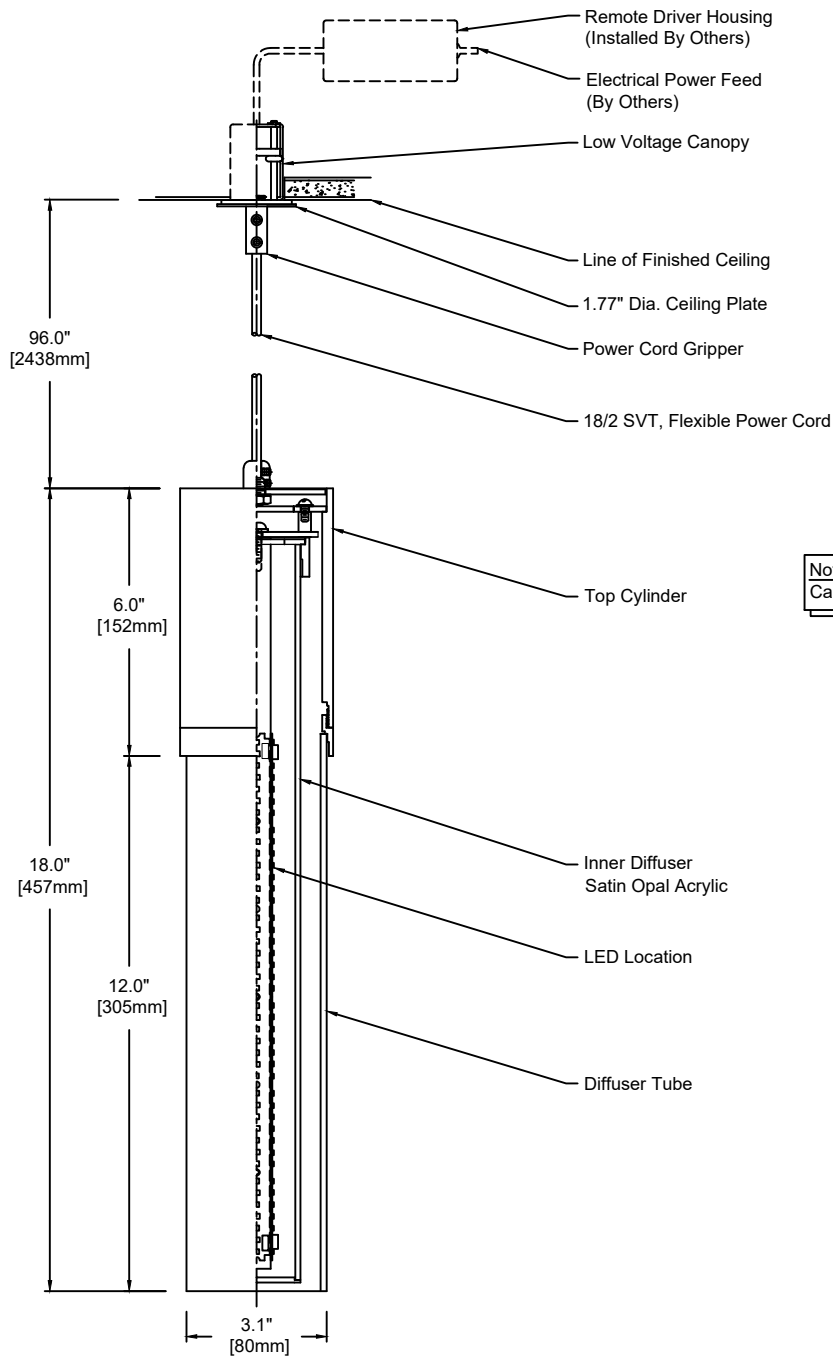

**PERSPECTIVE VIEW**

Note:  
Canopy finish matches housing

**Fixture Weight : 7 lbs**

1560	P	18	L	830	U	S	WA	12	RD - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
P - Pendant	18"	L	827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 DFPN L3DAE L3D0E	WA - White Opal Acrylic WG - White Opal Glass	10 - Satin Stainless Steel 12 - Satin Nickel 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color	RD - Remote Driver CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable	

**Wattage and Control**

Control (Remote 24V):  
S - Non-Dim  
D010 - 0-10V 10%  
DFPN - Lutron Forward Phase 1%, 120VAC  
L3DAE - Lutron Hi-Lume 1% EcoSystem  
L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "L" - 12 Watt  
2,700K - 1,600 lm  
3,000K - 1,600 lm  
3,500K - 1,664 lm  
4,000K - 1,696 lm

Technical Data:  
Form - linear, Operating voltage: 24VDC  
Color rendering index Ra min: 82 CRI, Available in 90 CRI  
Viewing angle: 110°  
Lifetime - L70: 60,000h  
Working temperature: -20°C to 60°C (-4°F to 140°F)

Remote Drivers:  
Max. wiring distance / Load

	Osram		Lutron		
Wire Gauge	≤48W	≤72W	≤96W	≤40W	≤96W
#18AWG	37'	25'	18'	15'	25'
#16AWG	59'	39'	29'	25'	40'
#14AWG	95'	63'	47'	40'	60'

