



Plume

TECHNICAL SHEET

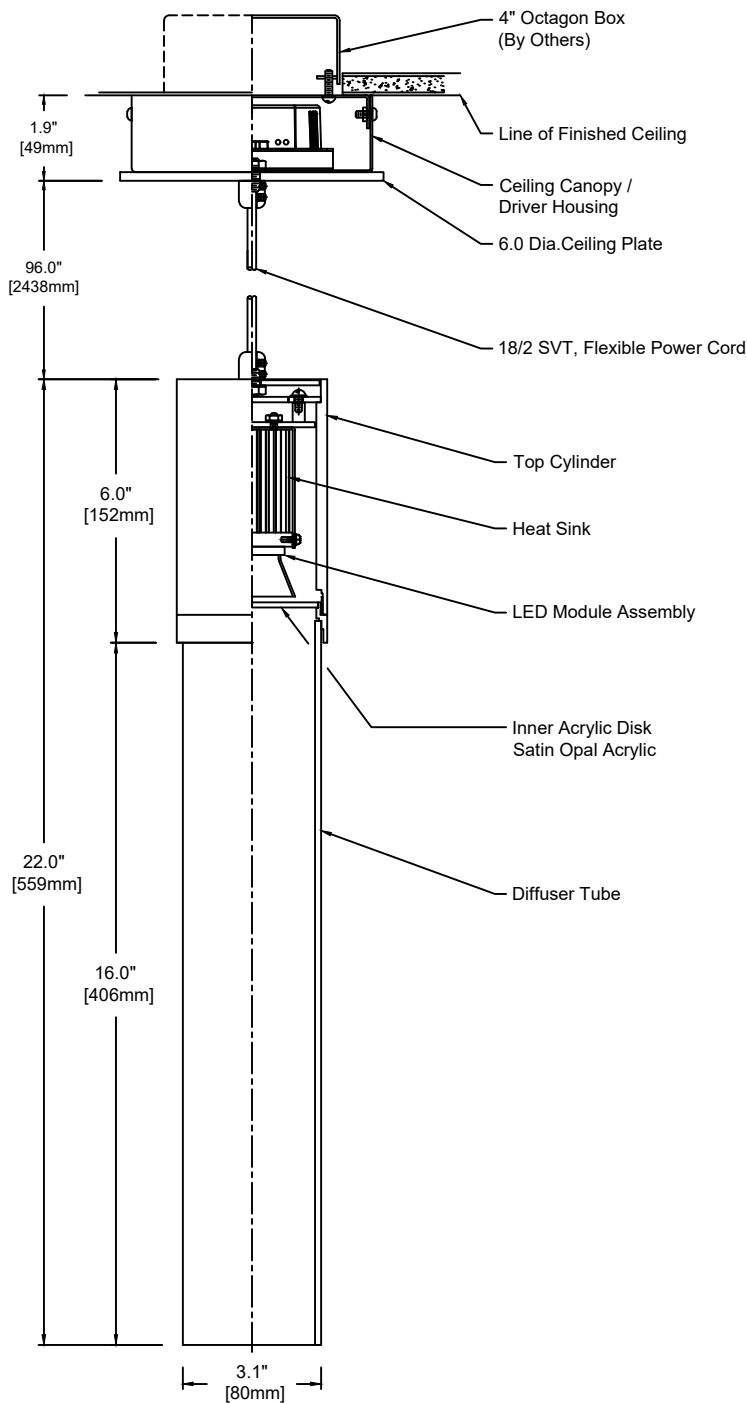

PERSPECTIVE VIEW

Note:
Canopy finish matches housing

Fixture Weight :12 lbs

1560	P	22	H	830	U	S	WA	12	ID - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
P - Pendant	22"	M	827 - 2,700K	1 - 120 VAC only	S	WA - White Opal Acrylic	10 - Satin Stainless Steel	ID - Integral Driver	
		H	830 - 3,000K	U - 120/277 V	D010	WG - White Opal Glass	12 - Satin Nickel	CC - Clear Insulated	
			835 - 3,500K		DFPN		21 - Painted White - RAL 9010 Matte	Cable (Standard)	
			840 - 4,000K		PEQ1		22 - Painted Custom Color	WC - White Cable	
					PEQ0			BC - Black Cable	

Wattage and Control

Control (Integral):
S - Non-Dim
D010 - 0-10V 10%
DFPN - Lutron Forward Phase 1%, 120VAC
PEQ1 - Lutron Hi-Lume 1% EcoSystem
PEQ0 - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "M" - 8.4 Watt / 1,311 lm
Wattage "H" - 12.6 Watt / 1,710 lm

Technical Data:
Color rendering index Ra min: 80 CRI, Available in 90 CRI
Reflector angle: 15°

Power and Voltage:
8.4 Watt / 18V / 500mA
12.6 Watt / 18V / 700mA

