


Plume

TECHNICAL SHEET

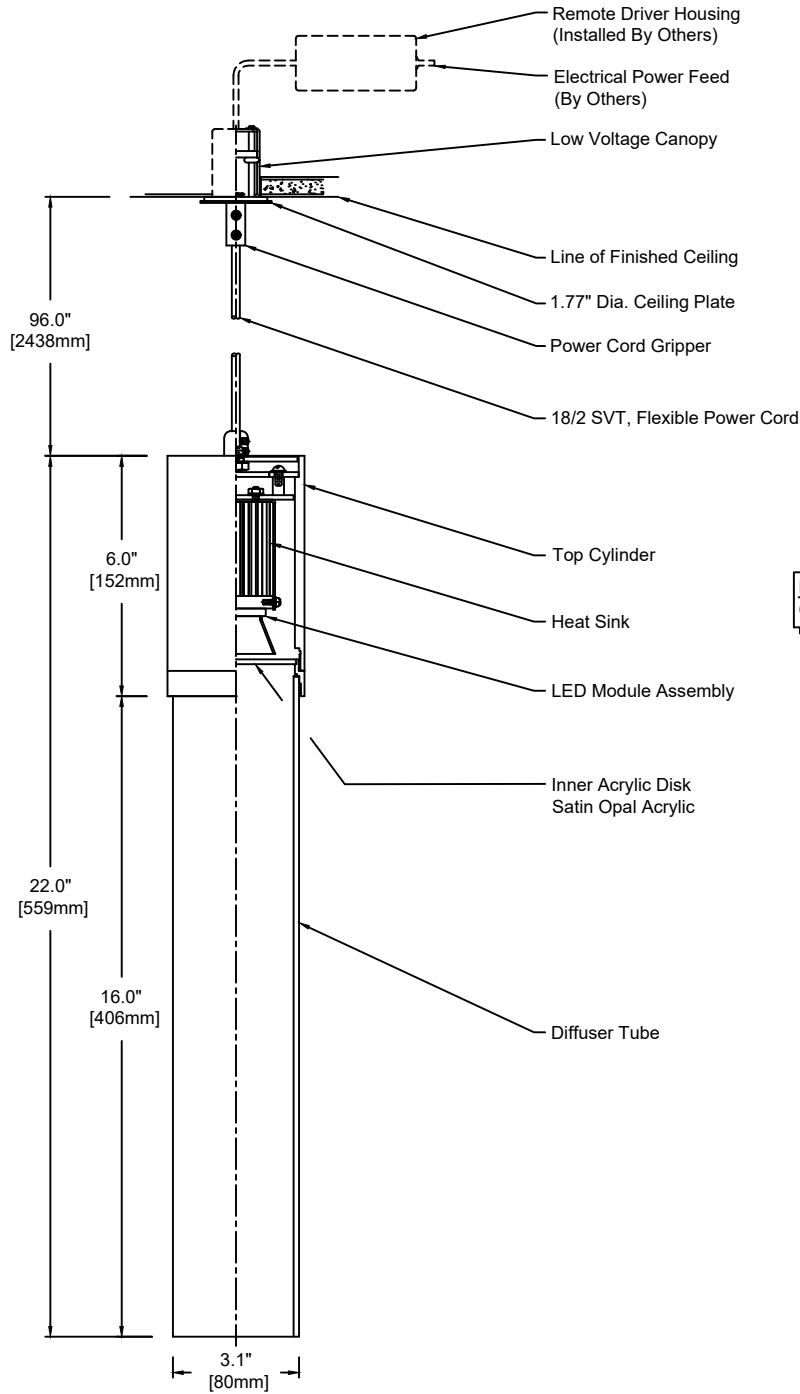

PERSPECTIVE VIEW

Note:
Canopy finish matches housing

Fixture Weight :10 lbs

1560	P	22	H	830	U	S	WA	12	RD - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
P - Pendant	22"	M	827 - 2,700K	1 - 120 VAC only	S	WA - White Opal Acrylic	10 - Satin Stainless Steel	RD - Remote Driver	
		H	830 - 3,000K	U - 120/277 V	D010	WG - White Opal Glass	12 - Satin Nickel	CC - Clear Insulated	
			835 - 3,500K		EC030W		21 - Painted White - RAL 9010 Matte	Cable (Standard)	
			840 - 4,000K		DFPN		22 - Painted Custom Color	WC - White Cable	
					PEQ1			BC - Black Cable	
					PEQ0				

Wattage and Control

Control (Constant Current, Remote):
 S - Non-Dim
 D010 - 0-10V 10%
 ECO30W - EldoLED 0-10V 1%
 DFPN - Lutron Forward Phase 1%, 120VAC
 PEQ1 - Lutron Hi-Lume 1% EcoSystem
 PEQ0 - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "M" - 8.4 Watt / 1,311 lm
 Wattage "H" - 12.6 Watt / 1,710 lm

Technical Data:
 Color rendering index Ra min: 80 CRI, Available in 90 CRI
 Reflector angle: 15°

Power and Voltage:
 8.4 Watt / 18V / 500mA
 12.6 Watt / 18V / 700mA

Remote Drivers:
 Max. wiring distance / Load

Wire Gauge	Hatch	Lutron	EldoLED
#18AWG	50'	30'	72'
#16AWG	80'	35'	118'
#14AWG	126'	50'	150'

