



Plume

TECHNICAL SHEET

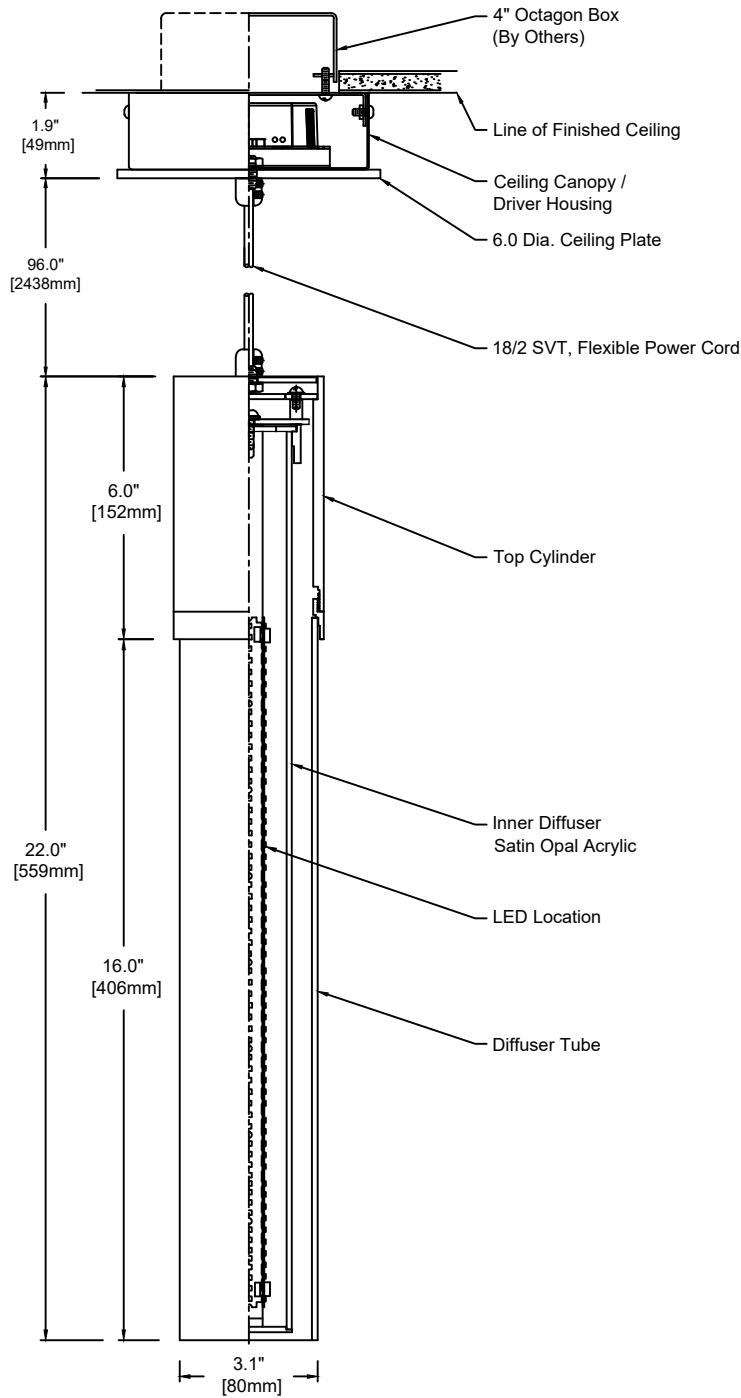

PERSPECTIVE VIEW

Note:
Canopy finish matches housing

Fixture Weight :12 lbs

| 1560 | P | 22 | L | 830 | U | S | WA | 12 | ID - CC |
|-------------|------|------|--|-----------------------------------|----------------------------|--|---|--|---------|
| Model | Type | Size | Wattage | Color Temp | Voltage | Control | Diffuser | Finish | Options |
| P - Pendant | 22" | L | 827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K | 1 - 120 VAC only U - 120/277 V | S D010 DFPN L3DAE | WA - White Opal Acrylic WG - White Opal Glass | 10 - Satin Stainless Steel 12 - Satin Nickel 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color | ID - Integral Driver CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable | |

Wattage and Control

Control (Integral):
S - Non-Dim
D010 - 0-10V 10%
DFPN - Lutron Forward Phase 1%, 120VAC
L3DAE - Lutron Hi-Lume 1% EcoSystem

Wattage "L" - 16 Watt
2,700K - 2,133 lm
3,000K - 2,133 lm
3,500K - 2,218 lm
4,000K - 2,261 lm

Technical Data:
Form - linear, Operating voltage: 24VDC
Color rendering index Ra min: 82 CRI, Available in 90 CRI
Viewing angle: 110°
Lifetime - L70: 60,000h
Working temperature: -20°C to 60°C (-4°F to 140°F)

