
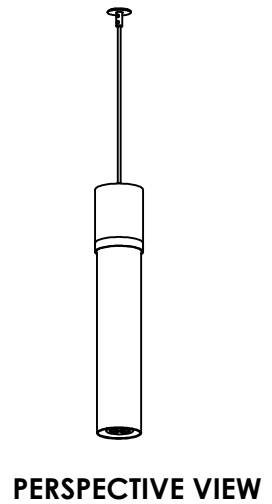


Plume

TECHNICAL SHEET

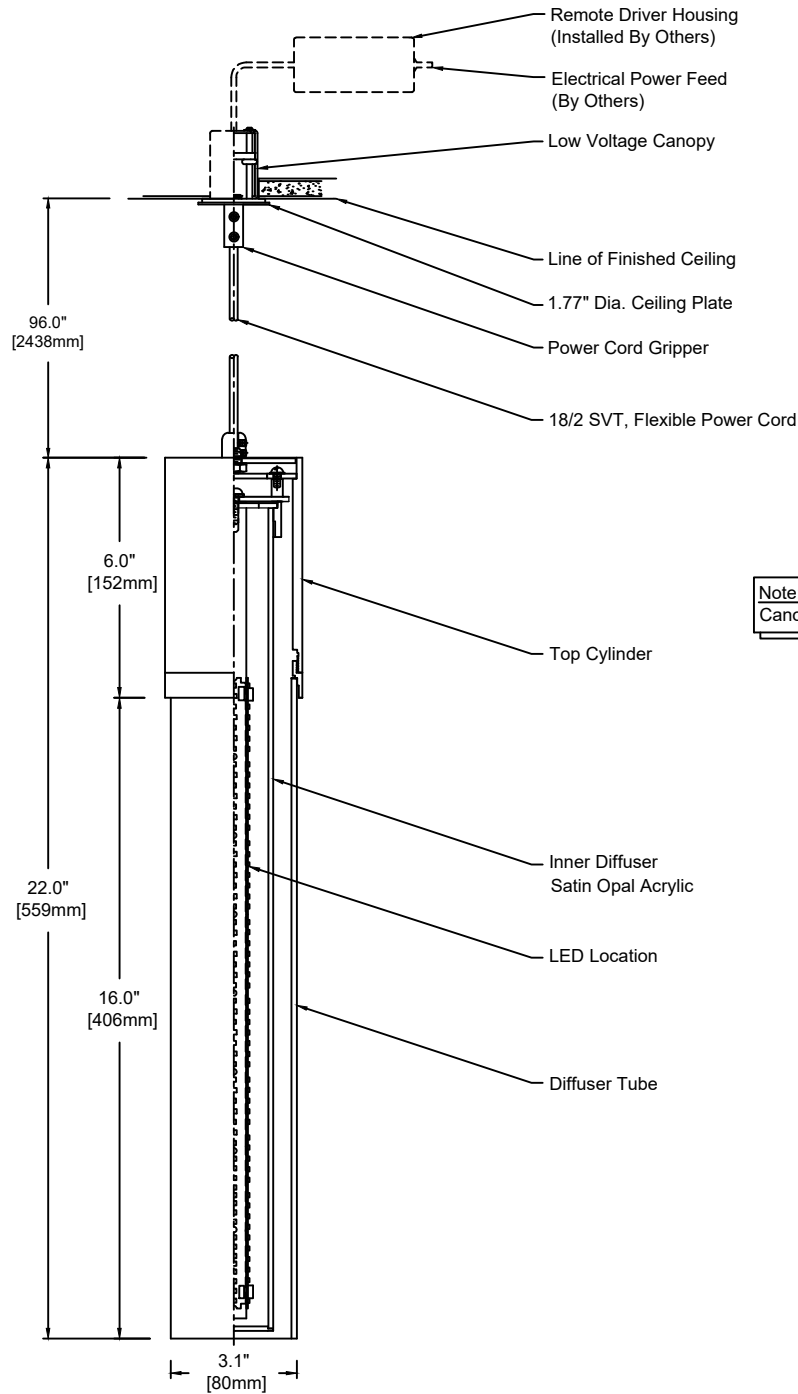

Note:
Canopy finish matches housing

Fixture Weight :10 lbs

| Model | Type | Size | Wattage | Color Temp | Voltage | Control | Diffuser | Finish | Options |
|-------------|------|------|---------|--------------------------------------------------------------|-----------------------------------|-------------------------------------|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 1560 | P | 22 | L | 830 | U | S | WA | 12 | RD - CC |
| P - Pendant | | 22" | L | 827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K | 1 - 120 VAC only U - 120/277 V | S D010 DFPN L3DAE L3D0E | WA - White Opal Acrylic WG - White Opal Glass | 10 - Satin Stainless Steel 12 - Satin Nickel 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color | RD - Remote Driver CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable |

Wattage and Control

Control (Remote 24V):
S - Non-Dim
D010 - 0-10V 10%
DFPN - Lutron Forward Phase 1%, 120VAC
L3DAE - Lutron Hi-Lume 1% EcoSystem
L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "L" - 16 Watt
2,700K - 2,133 lm
3,000K - 2,133 lm
3,500K - 2,218 lm
4,000K - 2,261 lm

Technical Data:
Form - linear, Operating voltage: 24VDC
Color rendering index Ra min: 82 CRI, Available in 90 CRI
Viewing angle: 110°
Lifetime - L70: 60,000h
Working temperature: -20°C to 60°C (-4°F to 140°F)

Remote Drivers:
Max. wiring distance / Load

| Wire Gauge | Osram ≤48W | Osram ≤72W | Osram ≤96W | Lutron ≤40W | Lutron ≤96W |
|------------|------------|------------|------------|-------------|-------------|
| #18AWG | 37' | 25' | 18' | 15' | 25' |
| #16AWG | 59' | 39' | 29' | 25' | 40' |
| #14AWG | 95' | 63' | 47' | 40' | 60' |

