



Plume

TECHNICAL SHEET

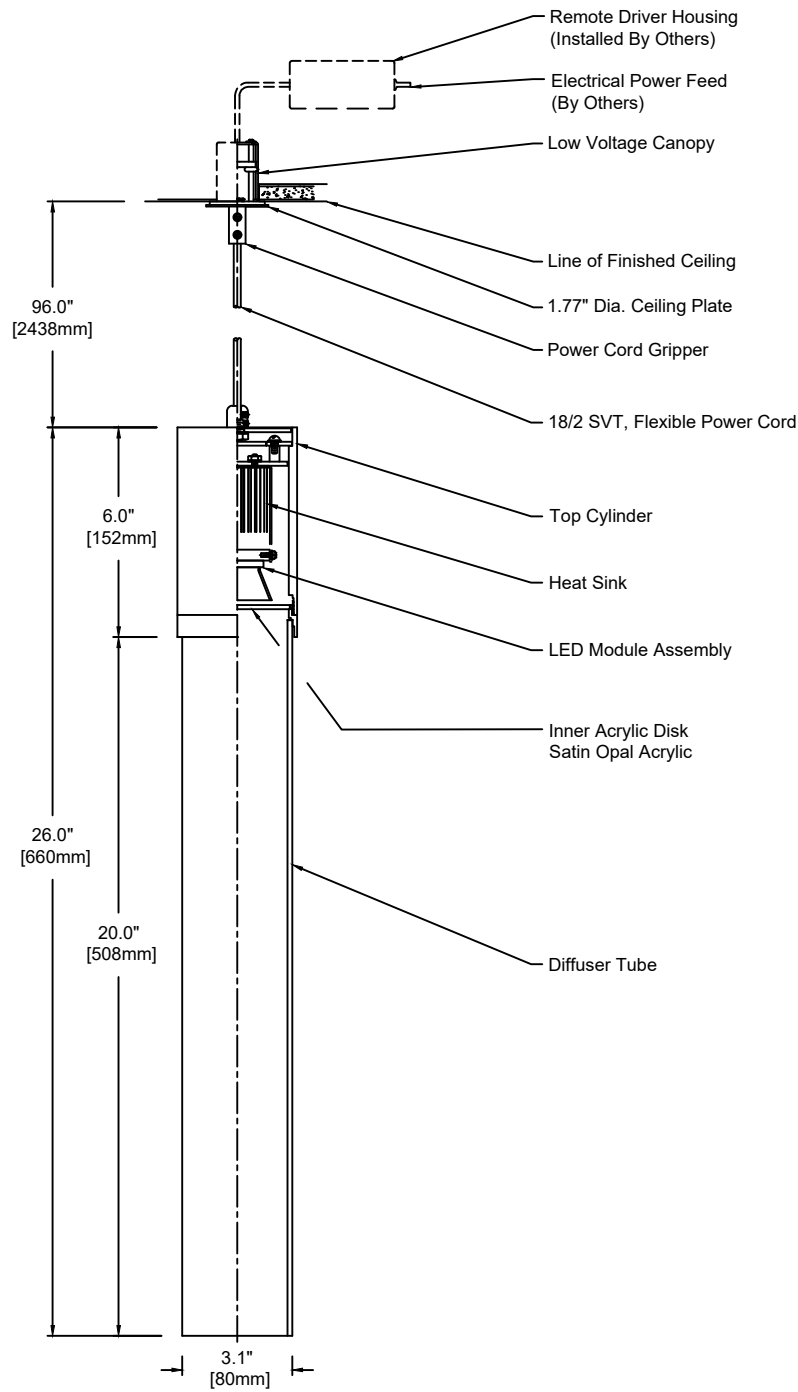

PERSPECTIVE VIEW

Note:
Canopy finish matches housing

Fixture Weight :13 lbs

1560	P	26	H	830	U	S	WA	12	RD - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
P - Pendant	26"	M	827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 EC030W DFPN PEQ1 PEQ0	WA - White Opal Acrylic WG - White Opal Glass	10 - Satin Stainless Steel 12 - Satin Nickel 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color	RD - Remote Driver CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable	

Wattage and Control

Control (Constant Current, Remote):
S - Non-Dim
D010 - 0-10V 10%
EC030W - EldoLED 0-10V 1%
DFPN - Lutron Forward Phase 1%, 120VAC
PEQ1 - Lutron Hi-Lume 1% EcoSystem
PEQ0 - Lutron Hi-Lume Premier 0.1% EcoSystem

Wattage "M" - 8.4 Watt / 1,311 lm
Wattage "H" - 12.6 Watt / 1,710 lm

Technical Data:
Color rendering index Ra min: 80 CRI, Available in 90 CRI
Reflector angle: 15°

Power and Voltage:
8.4 Watt / 18V / 500mA
12.6 Watt / 18V / 700mA

Remote Drivers:
Max. wiring distance / Load
Wire Gauge Hatch Lutron EldoLED
#18AWG 50' 30' 72'
#16AWG 80' 35' 118'
#14AWG 126' 50' 150'

