


Plume

TECHNICAL SHEET

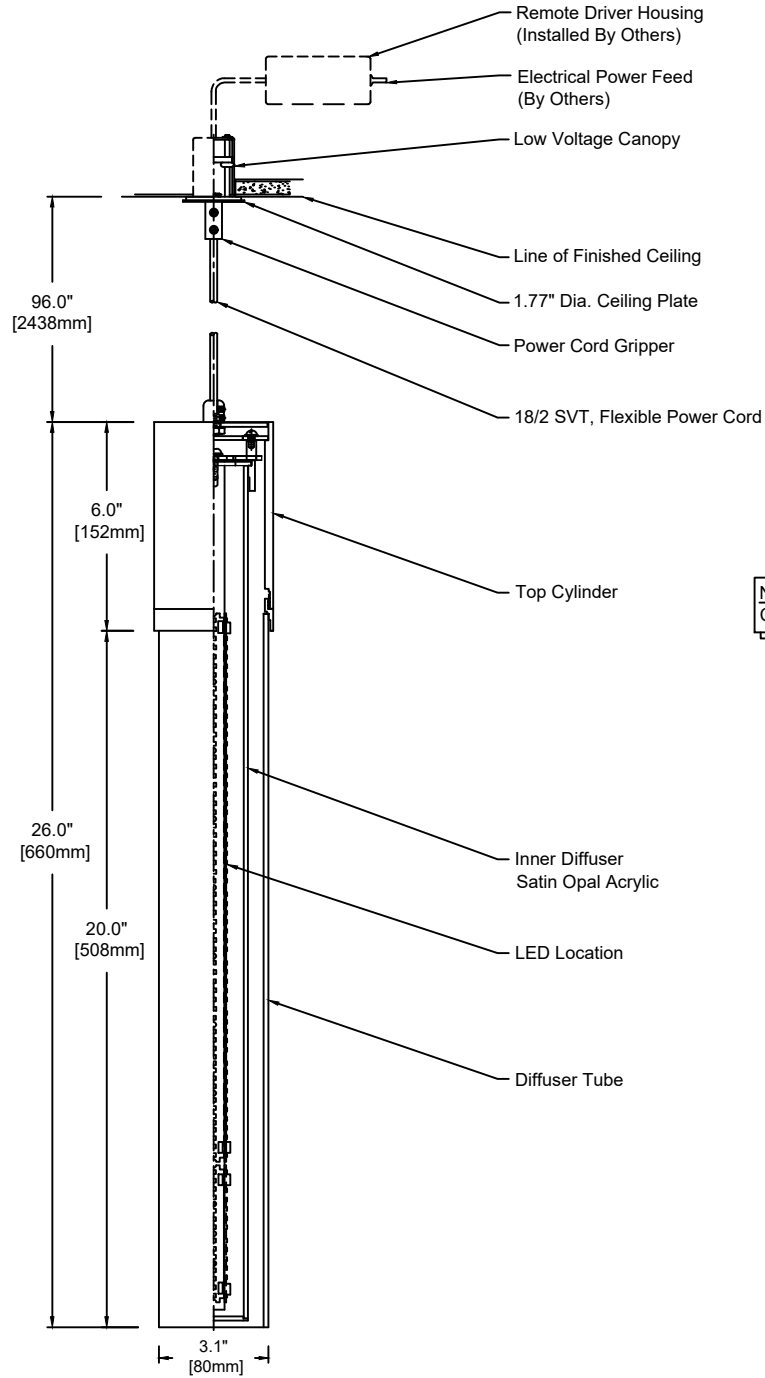

PERSPECTIVE VIEW

Note:
Canopy finish matches housing

Fixture Weight :13 lbs

1560	P	26	L	830	U	S	WA	12	RD - CC	
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options	
P - Pendant	26"	L	827 - 2,700K 830 - 3,000K 835 - 3,500K 840 - 4,000K	1 - 120 VAC only U - 120/277 V	S D010 DFPN L3DAE L3D0E	WA - White Opal Acrylic WG - White Opal Glass	10 - Satin Stainless Steel 12 - Satin Nickel 21 - Painted White - RAL 9010 Matte 22 - Painted Custom Color	RD - Remote Driver CC - Clear Insulated Cable (Standard) WC - White Cable BC - Black Cable		
Wattage and Control										
Control (Remote 24V): S - Non-Dim D010 - 0-10V 10% DFPN - Lutron Forward Phase 1%, 120VAC L3DAE - Lutron Hi-Lume 1% EcoSystem L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem		Wattage "L" - 20 Watt 2,700K - 2,666 lm 3,000K - 2,666 lm 3,500K - 2,773 lm 4,000K - 2,826 lm		Technical Data: Form - linear, Operating voltage: 24VDC Color rendering index Ra min: 82 CRI, Available in 90 CRI Viewing angle: 110° Lifetime - L70: 60,000h Working temperature: -20°C to 60°C (-4°F to 140°F)			Remote Drivers: Max. wiring distance / Load Osram Lutron			
							Wire Gauge			
							#18AWG 37' 25' 18' 15' 25'			
							#16AWG 59' 39' 29' 25' 40'			
							#14AWG 95' 63' 47' 40' 60'			

