
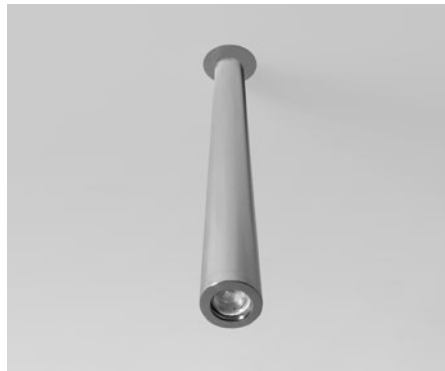


# Stick M

At just under 3" diameter, the all metal Stick M is used individually or in groupings with a custom canopy or attached to ARC, Stick provides functional illumination in the space.

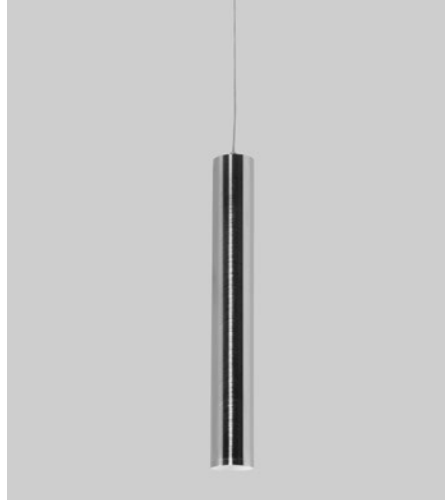

# inter•lux

**Model 1593** **1593**

**Type**  
 C Ceiling  
 P Pendant

**Size**  
 12 12"  
 Custom

**Wattage<sup>1</sup>**  
 M 8.4W (1,311 lm) @ 500 mA  
 H 12.6W (1710lm) @ 700mA



**Color Temp<sup>2</sup>**  
 827 2700  
 830 3000  
 835 3500  
 840 4000

**Voltage**  
 U 120/277  
 I 120VAC only


**Control (Constant Current)**  
 S Non-dim (integral)  
 D010 0-10V 10% (integral)  
 ECO30W EldoLED 0-10V 1% (Remote)  
 DFPN Lutron Forward Phase 1% 120VAC (Remote)  
 PEQ1 Lutron Hi-lume 1% EcoSystem (integral)  
 PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (integral)

**Finish<sup>3</sup>**  
 18 Polished aluminum **18**


**Options**  
 CC Clear insulated cable (standard)<sup>4</sup>  
 WC White cable  
 BC Black cable

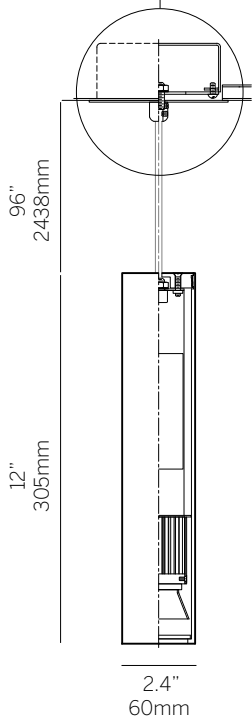

Pendant

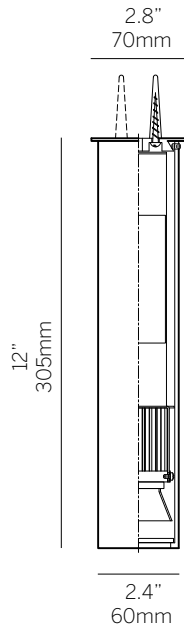

Surface



### Notes

- <sup>1</sup>Nominal lumens
- <sup>2</sup>82 CRI standard / 90 CRI available
- <sup>3</sup>Canopy finish matches housing
- <sup>4</sup>96" clear insulated cable standard



For up to date technical information, refer to [inter-lux.com/alm](http://inter-lux.com/alm)



[inter-lux.com/alm](http://inter-lux.com/alm)