
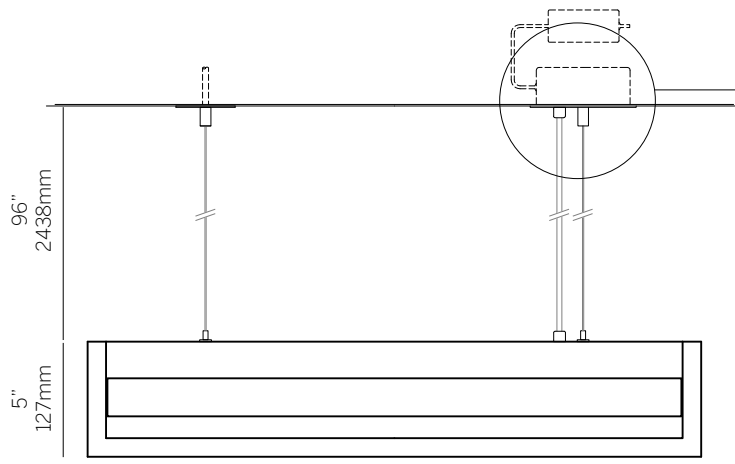
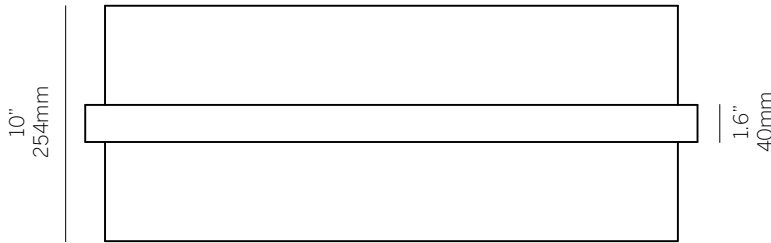



Wing AR

Wing AR pendant or surface mounted provides glare-free direct/indirect illumination from a simple architectural shape. A symmetrical, translucent reflector directs light down as well as allows light to softly illuminate the ceiling above.



26 / 37 / 49"
660 / 940 / 1245mm

Pendant

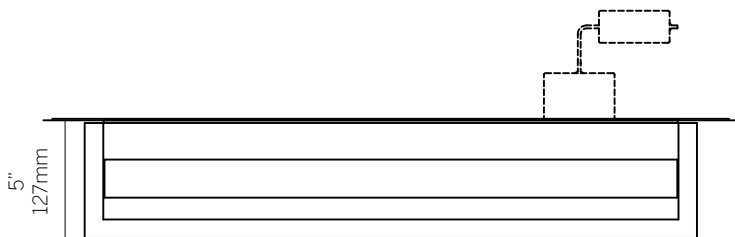

26 / 37 / 49"
660 / 940 / 1245mm

Surface

Model 1821

1821

Type

P Pendant
S Surface

Size

26 26"
37 37"
49 49"
Custom

Wattage¹

26"
L 6W (800lm)
M 12W (1486lm)
H 20W (2348lm)
37"
L 9W (1133lm)
M 17W (2106lm)
H 28W (3326lm)
49"
L 12W (1533lm)
M 23W (2848lm)
H 38W (4500lm)

Color Temp²

827 2700
830 3000
835 3500
840 4000

Voltage

U 120/277
I 120VAC only

Control (Remote 24V)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser

SW Satin opal acrylic

SW

Finish³

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
22 Painted custom color

Options

CC Clear insulated cable (standard)⁴
WC White cable
BC Black cable

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Reflector opal acrylic, Canopy finish matches housing
- ⁴96" clear insulated cable standard



For up to date technical information, refer to inter-lux.com/alm



inter-lux.com/alm