

**CP2204-D – CATENA™**  
4' Length – Disinfecting White LED



Type: Project:

[VisaLighting.com/products/Catena](http://VisaLighting.com/products/Catena)

Fill in shaded boxes using information listed below

Order Code: **CP2204-D** MODEL **A** UPLIGHT SOURCE **L40KD** DOWNLIGHT SOURCE **B** VOLTAGE **C** DIMMING CONTROLS **D** FINISH **E** OPTION **F** OAH



Extend productivity in the classroom or workplace with Catena, direct/indirect linear pendants with unprecedented style, flexible control options. Continuous disinfection models powered by Vital Vio are available.


**DIMENSIONS**

W = Width OAH = Overall Height X = Body Height L = Length

**F** **⚠** OAH must be specified

OAH is the maximum distance (in inches) from the bottom of the fixture to the ceiling plane.  
Example - OAH (24) indicates an overall fixture height of 24"

W	2"	(51 mm)
X	3-5/8"	(92 mm)
L	48-1/2"	(1232 mm)
OAH	24"	(610 mm)

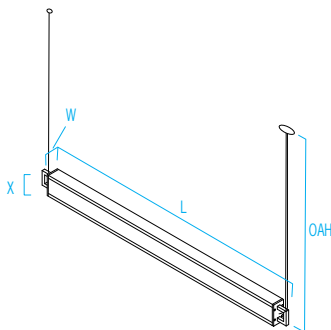

**A** UPLIGHT SOURCE (Select one) **B** VOLTAGE (Select one)

MVOLT fixture accepts 120 through 277 input voltage  
Dimmable 0-10V to 1% and 80+ CRI, within 3-step MacAdam  
VioSafe® White Light Disinfection® powered by **vital vio**

Source	CCT	Uplight Delivered Lumens	Power (Watts)	Voltage
L40K-L	4000K	2100	22	MVOLT, 347V
L40K-H	4000K	3200	33	

Source	CCT	Disinfection Downlight Delivered Lumens	Power (Watts)	Voltage
L40KD	4000K	1700	41	MVOLT, 347V

Uplight and downlight controlled separately

**C** DIMMING CONTROLS (Select one)

**⚠** Option availability may be interdependent with Voltage, Source or Other Options

- DAI** Dimming control (to 1%) via DALI protocol (not available with 347V)
- LDE1** Lutron Hi-Lume dimming control (to 1% with soft-on and fade-to-black) (not available with 347V)
- MLS2** Dual-level switching (100%, 50%, off) (not available with 347V)
- XSR** Dimming control (to 5%) via Phillips Xitanium Sensor Ready protocol (not available with 347V)

**D** FINISH (Select one)


See page 2 for color chart

Powder Coat Painted Finishes (Standard)

<b>AG7038</b> Agate Grey	<b>GLIM</b> Glimmer	<b>PB1035</b> Pearl Beige
<b>BMAT</b> Bronze Matte	<b>GSIL</b> Graphite Silver	<b>RUST</b> Rust
<b>BRNZ</b> Bronze	<b>GW9002</b> Grey White	<b>SUNG</b> Sungold
<b>BSIL</b> Blade Silver	<b>HTHR</b> Heather	<b>TW9016</b> Traffic White
<b>CVBL</b> Cove Blue	<b>JB9005</b> Jet Black	
<b>CW9001</b> Cream	<b>OBRZ</b> Old Bronze	

**E** OPTION

**CRD [Color]** (BLU) Blue, (GRY) Gray. White cord is standard if option is not selected



LED



ETL Listed




5 Year Warranty

**CP2204-D – CATENA**  
4' Length – Disinfecting White LED




**Photometrics**

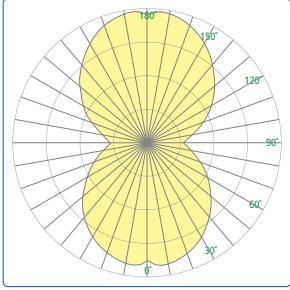

**Technical Information**

- Remote power supply
- L40KD uses Vital Vio's White Light Disinfection source technology to safely, continuously disinfect surfaces over time
- Lambertian uplight and downlight distribution
- Independently switched uplight and downlight output
- Extruded aluminum body with cast endcaps
- Extruded acrylic lenses
- No VOC powder coat paint finish
- ETL listed for damp locations. Not suited for exterior applications

**Relative Scale Drawing**

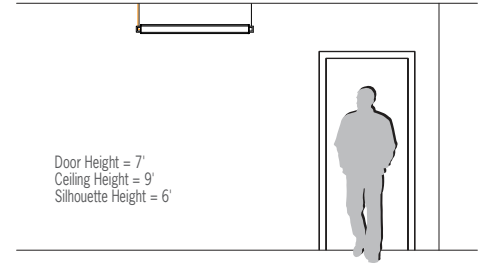

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see [VisaLighting.com/finishes](http://VisaLighting.com/finishes)

**Painted Finishes (Standard)**



This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.