

CM1910-T – UNITY™

3" Dual Overbed Units – Tunable



Type: Project:

VisaLighting.com/products/Unity

Fill in shaded boxes using information listed below

Order Code: **CM1910-T** MODEL **A** SOURCE **MVOLT** VOLTAGE

B FINISH (FLGD mounting option only) **C** MOUNTING OPTION





Incorporating gradual curves along with the soft glow of an illuminated lens, Unity creates a calm and relaxing environment, providing attractive and holistic solutions for your healthcare lighting needs.

Set includes 2 units in tandem. Order one model number per set

DIMENSIONS

W = Width L = Length D = Depth RD = Recessed Depth

W	3"	(76 mm)
L	47-3/4"	(1213 mm)
D	4"	(102 mm)
RD	4"	(102 mm)



Available Only as a Dual Overbed Set (Set includes two units in tandem)

A SOURCE (Select one) and VOLTAGE

MVOLT fixture accepts 120 through 277 input voltage
Dimmable 0-10V to 5%
Minimum 90CRI, 3-step MacAdam (2700K-5000K)

Source	CCT Range	Delivered Lumens*		Power (Watts)	Voltage
		Ambient	Exam		
TUN2	2700K-5000K	3000	6300	39	MVOLT
		39	82	82	
		119	9200	119	

*Delivered lumens can vary slightly as CCT changes

Note: Fixture provided with separate ambient and exam circuits

B FINISH (Select one) Available only with FLGD mounting option


Powder Coat Painted Finishes

See page 2 for color chart

AG7038 Agate Grey	GLIM Glimmer	PB1035 Pearl Beige
BMAT Bronze Matte	GSIL Graphite Silver	RUST Rust
BRNZ Bronze	GW9002 Grey White	SUNG Sungold
BSIL Blade Silver	HTHR Heather	TW9016 Traffic White
CVBL Cove Blue	JB9005 Jet Black	
CW9001 Cream	OBRZ Old Bronze	

C MOUNTING OPTION (Select one)

FLGD (Finish B)	Flanged drywall ceiling (Select Finish Color B)
SBAR	Screw-slot lay-in grid ceiling
TBAR	9/16" and 15/16" standard lay-in grid ceiling



LED



ETL Listed




5 Year Warranty

CM1910-T – UNITY


3" Dual Overbed Units – Tunable



Photometrics




Ambient



Exam


Technical Information

- Integral driver
- 90+ CRI
- Dimming/switching interface accessory available for pillow speaker/nurse call systems
- Left and right models wired discretely; units may be wired together in the field
- Chicago Plenum certified
- Recessed depth minimizes interference with systems within ceiling plenum
- Formed acrylic lenses
- Snap-in acrylic lens for tool-less access
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications



Ambient and Exam

Relative Scale Drawing

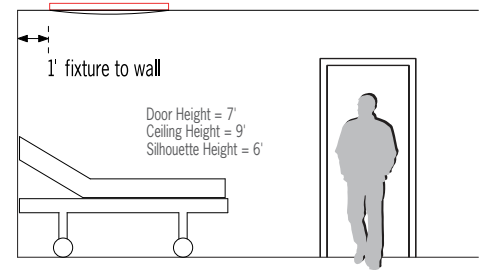

ACCESSORY (Order Separately)

- LVPC-DIM** Low voltage patient control interface (3 load with dimming) requires minimum of one switch per zone (by others), mounts in electrical box (by others)

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see VisaLighting.com/finishes

Painted Finishes (Standard)

