

CM1910-W – UNITY™

3" Dual Overbed Units – White LED



Type: Project:

VisaLighting.com/products/Unity

Fill in shaded boxes using information listed below

Order Code: **CM1910-W**

MODEL

A SOURCE

B VOLTAGE

C SOURCE OPTION

D DIMMING CONTROL

E FINISH
(FLGD mounting option only)

F MOUNTING OPTION





Incorporating gradual curves along with the soft glow of an illuminated lens, Unity creates a calm and relaxing environment, providing attractive and holistic solutions for your healthcare lighting needs.

Set includes 2 units in tandem. Order one model number per set

DIMENSIONS

W = Width L = Length D = Depth RD = Recessed Depth

W	3"	(76 mm)
L	47-3/4"	(1213 mm)
D	4"	(102 mm)
RD	4"	(102 mm)



Available Only as a Dual Overbed Set (Set includes two units in tandem)

A SOURCE (Select one) **B** VOLTAGE (Select one)

MVOLT fixture accepts 120 through 277 input voltage
Dimmable 0-10V to 1%
Minimum 80 CRI, within 3-step MacAdam

Source	Delivered Lumens			Voltage
	Ambient	Exam	Combined	
• L30K	5300	7600	12700	MVOLT, 120V, 277V, or 347V
• L35K	5400	7800	13100	
• L40K	5600	8000	13400	
Power (Watts)	57	89	144	

Note: Fixture provided with separate ambient and exam circuits

C SOURCE OPTION

80CRI within 3-step MacAdam if option is not selected

90CRI Color rendering index 93; minimum R9 value of 50 (delivered lumens reduced by 15%)

D DIMMING CONTROL OPTION (Select one)

⚠ Option availability may be interdependent with Voltage, Source or Other Options
Unit is 0-10V dimmable to 1% if no dimming option is selected

DALI Control via DALI protocol, dimming to minimum 1% (not available with 347V)

LDE1 Lutron EcoSystem dimming control (to 1% with soft-on and fade-to-black) (not available with 347V)


E FINISH (Select one) Available only with FLGD mounting option

Powder Coat Painted Finishes

AG7038 Agate Grey	GLIM Glimmer	OBRZ Old Bronze
BMAT Bronze Matte	GSIL Graphite Silver	PB1035 Pearl Beige
BRNZ Bronze	GW9002 Grey White	RUST Rust
BSIL Blade Silver	HTHR Heather	SUNG Sungold
CVBL Cove Blue	JB9005 Jet Black	TW9016 Traffic White
CW9001 Cream		

See page 2 for color chart

Options continued on Page 2



LED



ETL Listed



5 Year Warranty

CM1910-W – UNITY

3" Dual Overbed Units – White LED




Options continued


F MOUNTING OPTION (Select one)

- FLGD (Finish E)** Flanged drywall ceiling (Select Finish Color E)
- SBAR** Screw-slot lay-in grid ceiling
- TBAR** 9/16" and 15/16" standard lay-in grid ceiling


Photometrics



Ambient



Exam




Ambient and Exam

Technical Information

- Integral driver
- Optional 90+ CRI
- Dimming/switching interface accessory available for pillow speaker/nurse call systems
- Left and right models wired discretely; units may be wired together in the field
- Chicago Plenum certified
- Recessed depth minimizes interference with systems within ceiling plenum
- Formed acrylic lenses
- Snap-in acrylic lens for tool-less access
- Antimicrobial finishes (no VOC) on all interior and exterior painted surfaces
- ETL listed for damp locations. Not suited for exterior applications

Relative Scale Drawing

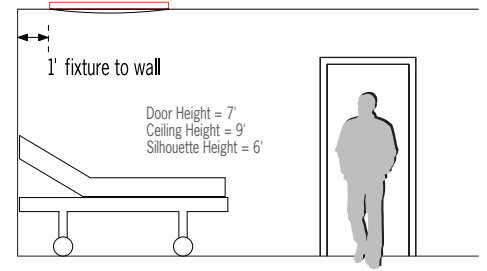


ACCESSORY (Order Separately)

- LVPC-DIM** Low voltage patient control interface (3 load with dimming) requires minimum of one switch per zone (by others), mounts in electrical box (by others)

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see VisaLighting.com/finishes

Painted Finishes (Standard)

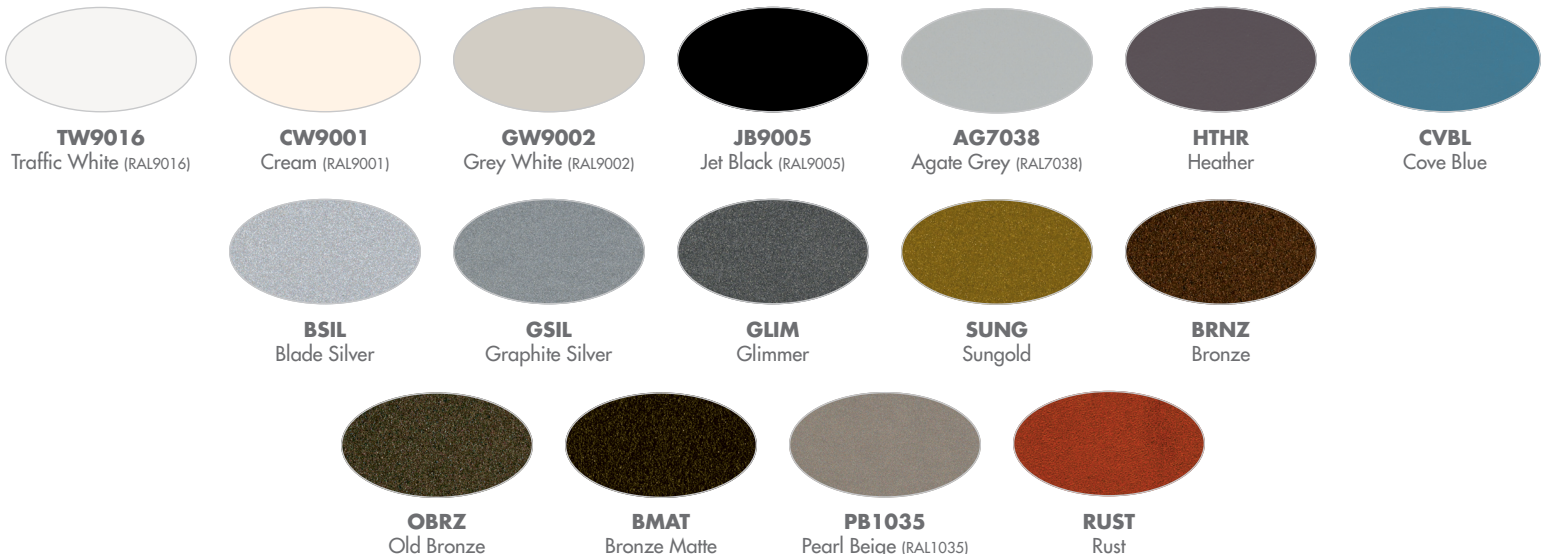

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.