

E

Vertical or Horizontal Wall Mount or Ceiling Mount (wall mount may require modification to existing wall structure)





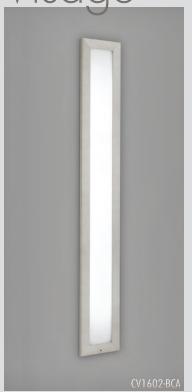

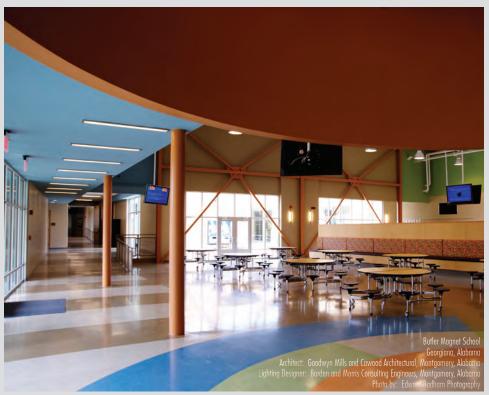





Features


- 5 year product warranty
- ADA compliant
- Extruded aluminum frame
- Flush frame mounts into wall and creates a seamless transition between surfaces
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Optional specialty diffuser materials available, including Vara Kamin's Impressions of Light® images, which are replicated from Kamin's original works of art
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Versatile mounting; ceiling mount, horizontal wall, vertical wall
- Shallow depth recessed housing rated for through-circuit wiring
- Recessed housing is available for pre-shipment for rough-in installation
- ETL listed to UL standards (US and Canada) for indoor damp locations. Not recommended for exterior applications

LED Features


- White source (3000K, 3500K, 4000K), 0-10V dimmable
- Modular design allowing replacement of the LED source and power supply
 Constant current LED technology to protect LEDs from experiencing "over current" conditions that can cause overheating and premature failure
 • Thermally managed within manufacturer specifications to promote long LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric and materials
- Mercury free LED source reduces impact to waste stream






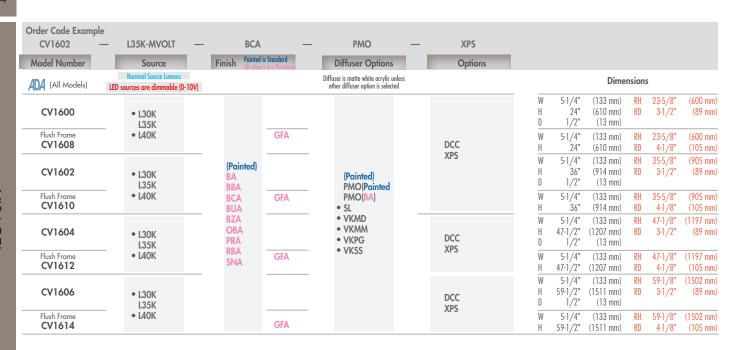


Line Drawings				
Depth is measured from wall to front of fixture				
W = Width	H = Height RH = Recessed Height	D = Depth RD = Recessed Depth		



Mounting Detail One long edge of cutout must be adjacent to the wall stud or other appropriate mounting structure





Mounting Detail (Flush Frame)

Recessed mount must be framed with studs

•	Indicated Finish or Option is not available with XPS		
	Source (Voltage)		
Specify Voltage or MVOLT MVOLT is a ballast that operates 120V through 277V			
	T-5/HO source exceeds VISA standards for brightness		
•	L40K	Cool White, 4000K, LED	(MVOLT)
	L35K	Neutral White, 3500K, LED	(MVOLT)
•	L30K	Warm White, 3000K, LED	(MVOLT)

Abbreviation Key

Finishes (see inside back cover)

Timones (see mistee back cover)				
(Pain	ted)	Color Code Required - see	color	chart
BA	Brushed	Aluminum	OBA	Oil-Rubbed Bronze Alternativ
BBA	Brushed	Brass Alternative	PRA	Pewter Alternative
BCA	Brushed	Chrome Alternative	RBA	Rustic Brass Alternative
BUA	Brushed	Copper Alternative	SNA	Satin Nickel Alternative
BZA	Brushed	Bronze Alternative		

Diffuser Options (see inside back cover)


		opinionio (coo micrao zanic coron)			
	Diffuser is	matte white acrylic unless other diffuser option is selected			
	PMO	Perforated metal overlay PMO Finishes			
		PMO(Painted) Color Code Required - see color chart			
		PMO(BA) Brushed Aluminum			
•	SL	Silver Spun Lumicor®			
•	VKMD	──── Vara Kamin's Moon Drops [®]			
•	VKMM	Vara Kamin's Morning Melody®			
•	VKPG	── Vara Kamin's Priscilla's Garden®			
•	VKSS	— Vara Kamin's Summer of Sundays®			
		Available only with Cool White (4000K) LED source (L40K)			
	Options				
		- 1 1 1 1 1			

Options	
DCC	Damp clear coat for metal finishes
XPS	Express 10 day shipping

Photometrics and 3D Modeling

Complete BIM, Sketchup and Photometric files for these models can be downloaded from www.visalighting.com

LER	Report
28	
31 28	08051
32	00001
33	
28	
31 28 32 33	08051
	28 31 28 32 33 28 31 28 32



Nominal LED Source Wattage					
	LCW	LNW	LWW		
CV1600 CV1608	24.6	24.6	24.6		
CV1602 CV1610	36.9	36.9	36.9		
CV1604 CV1612	49.2	49.2	49.2		
CV1606 CV1614	61.5	61.5	61.5		









Door Height = 7' Ceiling Height = 9' Silhouette Height = 6'				
---	--	--	--	--





FINISHES AND MATERIALS

800-788-VISA VisaLighting.com

Painted Finishes (standard)

Specify color code when ordering.

Individual paint and finish samples are available upon request. For additional information see VisaLighting.com/material-finishes

Acrylic Powder Coat

TW9016





JB9005







Cove Blue

Traffic White (RAL9016)

Grey White (RAL9002)

Jet Black (RAL9005)

Polyester Powder Coat

Agate Grey (RAL7038)

Heather

BSIL Blade Silver



GSIL Graphite Silver



GLIM Glimmer



SUNG Sungold



BRNZ Bronze



OBRZ Old Bronze



BMAT Bronze Matte



PB1035 Pearl Beige (RAL1035)



Rust

Metal Finishes (premium options)

For accurate metal matching use BHMA standard or request finish samples. Individual paint and finish samples are available upon request. For additional information see Visalighting.com/material-finishes



ВА Brushed Aluminum



BBA Brushed Brass Alternative



BCA Brushed Chrome Alternative



BUA Brushed Copper Alternative



BZA Brushed Bronze Alternative



ОВА Oil-Rubbed Bronze Alternative



PRA Pewter Alternative



RBA Rustic Brass Alternative



SNA Satin Nickel Alternative