

OP2130 – ZUME™
16" – Canopy Mount



Type: Project:

VisaLighting.com/products/Zume

Fill in shaded boxes using information listed below

Order Code: **OP2130**
MODEL

A SOURCE – **MVOLT**
VOLTAGE

B FINISH

C DIFFUSER OPTION

D OAH (OVERALL HEIGHT)




This pure glowing sphere appears to be floating in space and is crowned with a unique cap. An ideal addition to a patio, courtyard or boulevard. Offered in two sizes in frosted or white acrylic. The decorative cap can be finished with any of our 16 standard paint finishes.

DIMENSIONS

DIA = Diameter OAH = Overall Height X = Body Height

D ⚠️ OAH must be specified

OAH is the distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(42) indicates an overall fixture height of 42"



DIA	16"	(406 mm)
X	16-1/4"	(413 mm)
OAH	42"	(1067 mm)

A SOURCE (Select one) and VOLTAGE

MVOLT fixture accepts 120 through 277 input voltage
0-10V dimmable to 1%. 83CRI, within 3-step MacAdam

Sources	CCT	Delivered Lumens		Power (watts)	Voltage
		White Globe	Frosted Globe		
L30K-L	3000K	1300	1600	17	MVOLT
L35K-L	3500K	1300	1600		
L40K-L	4000K	1300	1600		
L30K-H	3000K	2000	2400	28	
L35K-H	3500K	2100	2500		
L40K-H	4000K	2100	2500		

B FINISH (Select one)

See page 2 for color chart

Powder Coat Painted Finishes (Standard)

AG7038	Agate Grey	GLIM	Glimmer	PB1035	Pearl Beige
BMAT	Bronze Matte	GSIL	Graphite Silver	RUST	Rust
BRNZ	Bronze	GW9002	Grey White	SUNG	Sungold
BSIL	Blade Silver	HTHR	Heather	TW9016	Traffic White
CVBL	Cove Blue	JB9005	Jet Black		
CW9001	Cream	OBRZ	Old Bronze		

C DIFFUSER OPTION

Globe is white if no option is selected

FRST Frosted translucent globe




White



Frosted Translucent



IP65



LED



ETL Listed




5 Year Warranty


OP2130 – ZUME
16" – Canopy Mount



Photometrics Technical Information Relative Scale Drawing




Frosted Globe



White Globe

- High or low lumen output
- Integral driver
- IP65 rated
- Parallel mounting cables reduce twisting
- Mounts to standard electrical junction box (by others)
- **Cables connecting fixtures to each other are considered to be structural and are to be designed by a qualified structural engineer**
- Cable connections to the fixture accept 3/32" to 1/4" diameter cables
- Tether cables are perpendicular to the canopy cable
- Black power cord
- White acrylic diffuser or optional frosted translucent acrylic diffuser
 - ◆ UV stable
 - ◆ UL-94 HB Flame Class rated
- Spun aluminum cap with laser cut-outs; cast aluminum mounting component
- No VOC powder coat paint finish
- ETL listed for wet locations

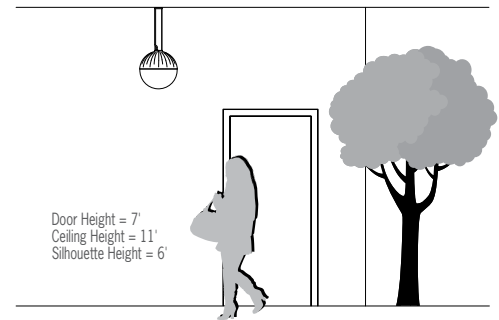

Tether Accessories (Order Separately)

Stainless Steel Compression Sleeve (AY-CS3/32)


3/32" Stainless Steel Cable (AY-CBL3/32-50)



Qty (10)



50 feet



Accessory	Quantity

Accessories are made for Visa Lighting canopy mount fixture applications. If sourced elsewhere, materials must be of equivalent grade. For important information about accessory applications and installation, see Installation Instructions

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see VisaLighting.com/materials-finishes

Painted Finishes (Standard)

TW9016 Traffic White (RAL9016)	CW9001 Cream (RAL9001)	GW9002 Grey White (RAL9002)	JB9005 Jet Black (RAL9005)	AG7038 Agate Grey (RAL7038)	HTHR Heather	CVBL Cove Blue
BSIL Blade Silver	GSIL Graphite Silver	GLIM Glimmer	SUNG Sungold	BRNZ Bronze		
OBZR Old Bronze	BMAT Bronze Matte	PB1035 Pearl Beige (RAL1035)	RUST Rust			

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.