

**Application**

Designed for down lighting atriums, canopies, passages, and other interior and exterior locations featuring a symmetrical wide beam light distribution.

**Materials**

Luminaire housing constructed of die-cast marine grade, copper free ( $\leq 0.3\%$  copper content) A360.0 aluminum alloy  
 Clear safety glass  
 Reflector made of pure anodized aluminum  
 High temperature silicone gasket  
 Stainless steel screw clamps  
 Ceiling mounted driver enclosure constructed of aluminum

**NRTL** listed to North American Standards, suitable for wet locations  
 Protection class IP 65  
 Weight: 0.5 lbs

**Electrical**

Operating voltage	120-277V AC
Minimum start temperature	-30° C
LED module wattage	4.2 W
System wattage	6 W
Controllability	0-10V dimmable
Color rendering index	Ra > 90
Luminaire lumens	299 lumens (3000K)
Lifetime at Ta = 15° C	>500,000 h (L70)
Lifetime at Ta = 25° C	159,000 h (L70)

**LED color temperature**


- 4000K - Product number + **K4**
- 3500K - Product number + **K35**
- 3000K - Product number + **K3**
- 2700K - Product number + **K27**

**BEGA** can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

**Finish**

All BEGA standard finishes are matte, textured polyester powder coat with minimum 3 mil thickness.

Available colors	Black (BLK)	White (WHT)	RAL:
	Bronze (BRZ)	Silver (SLV)	CUS:

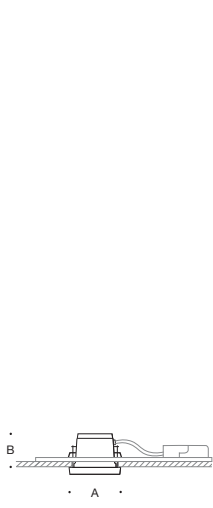

**LED recessed ceiling downlight · wide beam**

	LED	$\beta$	A	B
<b>55 922</b>	4.2 W	81°	3 1/8"	2 1/2"

$\beta$  = Beam angle

**BEGA** 1000 BEGA Way, Carpinteria, CA 93013 (805) 684-0533 info@bega-us.com

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on this sheet is subject to change at the discretion of BEGA North America. For the most current technical data, please refer to bega-us.com  
 © copyright BEGA 2018 Updated 07/10/18

Type:

BEGA Product:

Project:

Modified:

**Mounting options**

**CP** Ceiling pan

