



NANO MIX


Triple Diode DMX Controlled Line Voltage
Small Profile Linear LED Fixture

Customer:

Date:

Type:

Project:

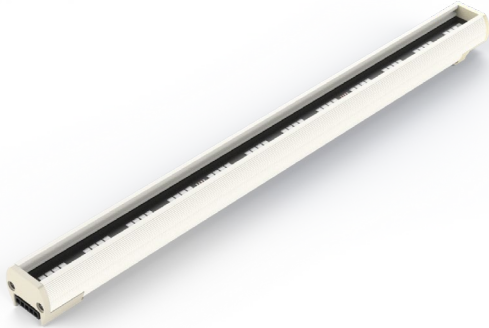

- Even color washing, also at short distances.
- 4 Channel allowing use of white or single color additional LED.
- Compact, variable light fixture for dry and wet location use.
- Fixture comes in 6" increments (12" minimum).
- Many options and accessories to suit a range of projects.
- Integrates with Boca Wireless DMX Router system for ease of installation and control.
- Operates with any standard 512 DMX controller.
- White or black finish, check factory for availability.
- Contact Boca Flasher for tips with custom installations.
- Total linear feet per power feed: 40 ft. @ 120V per port.



PRODUCT SPECIFICATIONS:


	COLOR OPTION	OPTIC	VOLTAGE	FINISH	MOUNTING	LENS	BAFFLE (Not Available with 10° Optics)	REFLECTOR	RATING
NanoMix	RGB(W)	10°	90-120V	W White	F Fixed	C Clear	SQ Square	N No	I Interior
	2000K	15°x40°	230-277V	B Black	H Hinge	CLD Clear Light Diffused (Not Available with Optics)	ASYM Asymmetric	Y Yes (Not Available with Optics)	E Exterior
	2400K	120°				HD Heavy Diffused (Not Available with Optics)			
	2700K								
	3000K								
	3500K								
	4000K								
	5000K								
	6500K								
	Red								
	Blue								
	Amber								
	Green								

DIMENSIONS:

Plan View



Elevation View

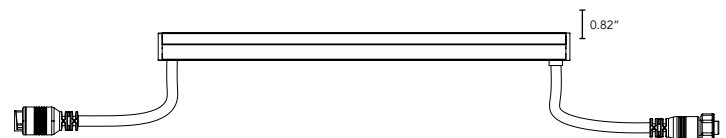

NANO MIX

Triple Diode DMX Controlled Line Voltage
Small Profile Linear LED Fixture




TECHNICAL SPECIFICATIONS:

WATTAGE	6 watts per linear ft.
INPUT VOLTAGE	90-120V, 277V
CONTROL	NanoRouter
POWER CABLE	UL Standard 6 ft.
LENGTH	12-72", in 6" increment
TOTAL WIDTH	1.03"
TOTAL HEIGHT	0.82" (not including clip)
INPUT CURRENT	54mA @ 120V 24mA @ 277V
MOUNTING	Fixed, Hinge
AVAILABLE OPTICS	10°, 15°x40°, 120°
FINISH OPTICS	Interior: White or Black High Temp. ABS Plastic Exterior: Anodized Aluminum
COLOR OPTIONS	RGBW, 2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K, Red, Blue, Amber, Green
TOTAL LINEAR FT. PER POWER FEED	40ft. @ 120V
COLOR RENDERING INDEX (CRI)	90 + CRI
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity
RATING	IP50, IP68 Pending

** Military spec available under special request-lead times may be impacted.

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

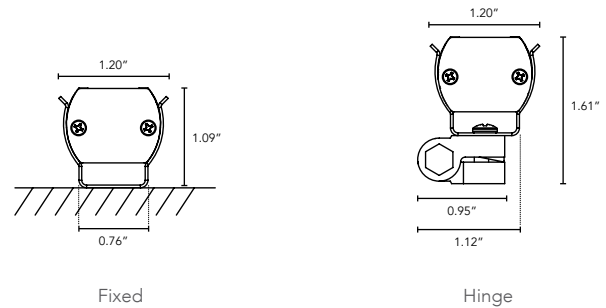

OUTPUT:

Color Temperature (K)	Wattage	Lumens	LM/W
2000	6	365	61
2400	6	470	79
2700	6	560	94
3000	6	695	116
3500	6	760	127
4000	6	800	134