

# SD-SW24/4.0

STRIP: Static White



Part of our Standard collection, SD-SW24/4.0 is an energy-efficient 24-volt, 4.0-watt/foot strip and is available in CCTs of 2400K, 2700K, 3000K, 3500K, and 4000K. Offered in dry or wet.


The SD-SW24/4.0 strip is Quick Ship eligible in CCT's of 2700K, 3000K, and 3500K and is available in full reels or custom cut lengths.

## Technical Information [Calculated L70 = 70000 hours]


Tested with SD-SW24/4.0-DRY

| CCT     | Lumen/ft | Luminous Efficacy | CRI Ra | CRI R9 | TM30 Rf | TM30 Rg |
|---------|----------|-------------------|--------|--------|---------|---------|
| ● 2400K | 358      | 88 Lm/W           | 98     | 90     | 95      | 103     |
| ● 2700K | 361      | 88 Lm/W           | 98     | 99     | 96      | 103     |
| ● 3000K | 379      | 93 Lm/W           | 98     | 95     | 96      | 101     |
| ● 3500K | 387      | 95 Lm/W           | 96     | 84     | 91      | 100     |
| ○ 4000K | 438      | 107 Lm/W          | 98     | 98     | 93      | 101     |

## Dimensions

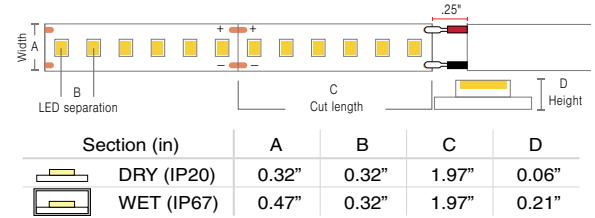

## Part Number Builder

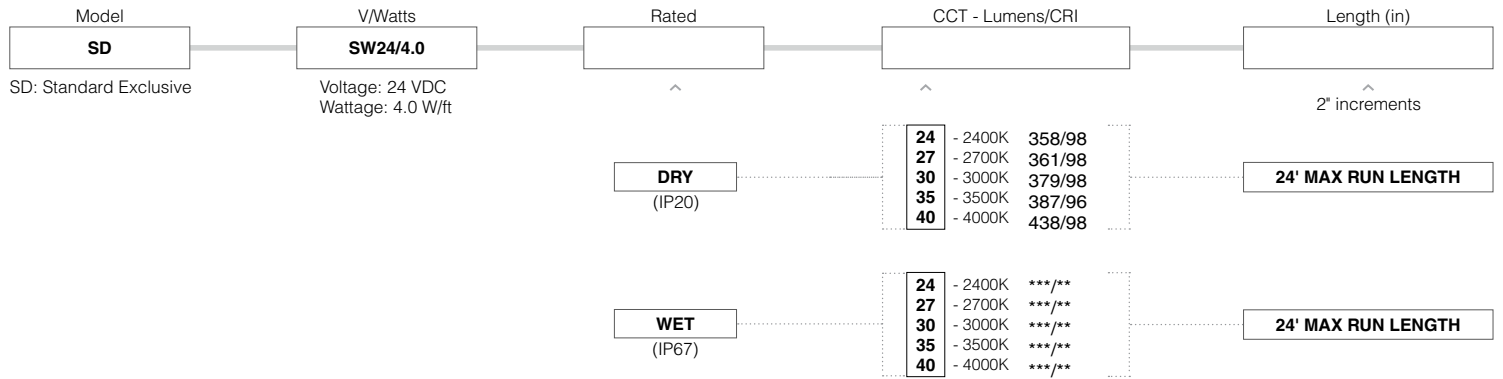

- 5 year warranty
- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void
- All data has +/- 5% tolerance
- UL Listed
- Title 24 - JA8-2016 Strips: DRY and WET rated, 2700K and above
- Suitable for installation in the storage area of a clothes closet when assembled as a fixture at Q-Tran facility
- Available in DRY 25' & 100' reels for field installation. Contact factory



# SD-SW24/4.0

STRIP: Static White



## Compatible Extrusions

|     | SLIM         | WIDE | ROND | TORQ | TRE3 | LALO | TALO |
|-----|--------------|------|------|------|------|------|------|
| DRY | ✓            | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |
| DMP |              |      |      |      |      |      |      |
| ENC |              |      |      |      |      |      |      |
| WET | ✓<br>No Lens | ✓    |      | ✓    | ✓    | ✓    | ✓    |

|     | ARKA | TELA | VEVE | FLUR | EMBD | LATO | MDIN | OPTI |
|-----|------|------|------|------|------|------|------|------|
| DRY | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |
| DMP |      |      |      |      |      |      |      |      |
| ENC |      |      |      |      |      |      |      |      |
| WET | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |      |      |

## Compatible Accessories

| SNP-LEAD                | SNP-INLINE              | CLP-LEAD                | CLP-INLINE              | Q-mini-J | iQ-LED-24-KIT | iQ-JUMP-6-KIT | iQ-LED-67-KIT | iQ-JUMP-67-KIT |
|-------------------------|-------------------------|-------------------------|-------------------------|----------|---------------|---------------|---------------|----------------|
|                         |                         |                         |                         |          |               |               |               |                |
| DRY only<br>22 - 20 AWG | DRY only<br>22 - 20 AWG | DRY only<br>22 - 18 AWG | DRY only<br>22 - 18 AWG |          |               |               |               |                |