

VERS-CLEAR (03)

Linear Fixtures - Surface



VERS Clear delivers the maximum amount of light with a clear lens that sits flush to the fixture housing. The thin profile of the lens allows for maximum variations of LED sources and the most delivered lumens in the VERS family. Versatility in application abounds, allowing for installation in dry, damp, and wet settings.

Part Number Builder

Static White



Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-SW				CL									
Voltage: 24 VDC Typical lumens at 5.0W/ft at 3000K: 427 lm/ft	1.5	20	DRY (IP20)		L1-WH	S1	BW CON6	CLS	WH	CL2	CC	ST	
	3.0	22			L1-BK	S2	CON24		BK	CL2P	MG	BK	
	4.0	24			N/A	S3						BZ	
	5.0	27				S4						WH	
		30				Single (Closed exit)							
		35				P1	BW CON6	BW CON6					
		40				P2	CON24	CON24					
			DMP (IP54)			P3							
						P4							
						Pass through							
	1.5	24											
	3.0	27											
	4.0	30											
	5.0	35											
		40											

*Available in 1" increments for 1.5W/ft - 5.0W/ft and 2" increments for 6.0W/ft. Maximum fixture length of 98". See fixture detail on page 6. Minimum fixture length 6".

See VERS-03-SK for suspended version.

Static White High Efficacy



Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-SW				CL									
Voltage: 24 VDC Typical lumens at 6.0W/ft at 3000K: 692 lm/ft	1.5HE	20	DRY (IP20)		L1-WH	S1	BW CON6	CLS	WH	CL2	CC	ST	
	3.0HE	22			L1-BK	S2	CON24		BK	CL2P	MG	BK	
	6.0HE	24			N/A	S3						BZ	
	9.0HE	27				S4						WH	
		30				Single (Closed exit)							
		35				P1	BW CON6	BW CON6					
		40				P2	CON24	CON24					
			DMP (IP54)			P3							
						P4							
						Pass through							
	1.5HE	24											
	3.0HE	27											
	6.0HE	30											
		35											
		40											

*Available in 2" increments, maximum fixture length of 98". See fixture detail on page 6. Minimum fixture length 6".

See VERS-03-SK for suspended version.

- **BW** comes in standard 36" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
- Specify **CL2P** for plenum rated wire
- **One Step, One Bin** based on 5W/ft

- 5 year warranty
- Field modifications void warranty
- Data subject to change, all data has +/- 5% tolerance

- Compatible for use with Q-Tran power supplies
- Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less

VERS-CLEAR (03)

Linear Fixtures - Surface



Dynamic White



whiteoptics®

5 YEAR WARRANTY

Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-DW	6.0			CL									
Voltage: 24 VDC Typical lumens at 6.0W/ft at 3000K: 256 lm/ft													
		20/27 20/30	DRY (IP20)		L1-WH L1-BK N/A	S1 S2 S3 S4 Single (Closed exit)	BW CON6 CON24	CLS	WH BK	CL2 CL2P	CC MG	ST BK BZ WH	
		24/30	DMP (IP54)										
		20/27 20/30	WET (IP67)			P1 P2 P3 P4 Pass through	BW CON6 CON24	BW CON6 CON24					

*Available in 2" increments, maximum fixture length of 98". See fixture detail on page 6. Minimum fixture length 6".

See VERS-03-SK for suspended version.

Dynamic White High Efficacy



whiteoptics®

5 YEAR WARRANTY

Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-DW				CL									
Voltage: 24 VDC Typical lumens at 5.0W/ft at 3000K: 254 lm/ft													
	3.0HE 5.0HE 8.0HE	20/27 20/30 27/40 27/55	DRY (IP20)		L1-WH L1-BK N/A	S1 S2 S3 S4 Single (Closed exit)	BW CON6 CON24	CLS	WH BK	CL2 CL2P	CC MG	ST BK BZ WH	
	3.0HE 5.0HE	24/30 27/40	DMP (IP54)										
	3.0HE 5.0HE	20/27 20/30 27/40 27/55	WET (IP67)			P1 P2 P3 P4 Pass through	BW CON6 CON24	BW CON6 CON24					

*Available in 2" increments to 96", plus end caps. See fixture detail on page 6. Minimum fixture length 6".

See VERS-03-SK for suspended version.

Warm Dim



whiteoptics®

5 YEAR WARRANTY

Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-WD	6.0			CL									
Voltage: 24 VDC Typical lumens at 6.0W/ft at 3000K: 488 lm/ft													
		19/27 19/30	DRY (IP20)		L1-WH L1-BK N/A	S1 S2 S3 S4 Single (Closed exit)	BW CON6 CON24	CLS	WH BK	CL2 CL2P	CC MG	ST BK BZ WH	
			WET (IP67)										
						P1 P2 P3 P4 Pass through	BW CON6 CON24	BW CON6 CON24					

*Available in 2" increments, maximum fixture length of 98". See fixture detail on page 6. Minimum fixture length 6".

See VERS-03-SK for suspended version.

Only compatible with QZ and QZLP. Not compatible with other power supplies such as QTM-eLED+WD and QOM-eLED+WD.

- **BW** comes in standard 36" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
- Specify **CL2P** for plenum rated wire

- 5 year warranty
- Field modifications void warranty

- Data subject to change, all data has +/- 5% tolerance
- Compatible for use with Q-Tran power supplies

VERS-CLEAR (03)

Linear Fixtures - Surface



Static Color    **5 YEAR WARRANTY** 

Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-SC	5.0			CL									
Voltage: 24 VDC Typical lumens at 5.0W/ft in green: 569 lm/ft													
		GR BL RD AB	DRY (IP20) DMP (IP54) WET (IP67)		L1-WH L1-BK N/A	S1 S2 S3 S4 Single (Closed exit) P1 P2 P3 P4 Pass through	BW CON6 CON24	CLS BW CON6 CON24	WH BK	CL2 CL2P	CC MG	ST BK BZ WH	

*Available in 2" increments, maximum fixture length of 98". See fixture detail on page 6. Minimum fixture length 6".

See VERS-03-SK for suspended version.

RGB    **5 YEAR WARRANTY**

Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-RGB	6.0	RGB		CL									
Voltage: 24 VDC Typical lumens at 6.0W/ft in green: 180 lm/ft													
			DRY (IP20) DMP (IP54) WET (IP67)		L1-WH L1-BK N/A	S1 S2 S3 S4 Single (Closed exit) P1 P2 P3 P4 Pass through	BW CON6 CON24	CLS BW CON6 CON24	WH BK	CL2 CL2P	CC MG	ST BK BZ WH	

*Available in 2" increments, maximum fixture length of 98". See fixture detail on page 6. Minimum fixture length 6".

See VERS-03-SK for suspended version.

RGBW    **5 YEAR WARRANTY**

Product	W/FT	CCT	Rated	Lens	Louver	Input/Output	Connector/Wire In	Connector/Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03-RGBW	6.0			CL									
Voltage: 24 VDC Typical lumens at 6.0W/ft at 3000K: 146 lm/ft													
		RGBW-27 RGBW-30	DRY (IP20) DMP (IP54)		L1-WH L1-BK N/A	S1 S2 S3 S4 Single (Closed exit) P1 P2 P3 P4 Pass through	BW CON6 CON24	CLS BW CON6 CON24	WH BK	CL2 CL2P	CC MG	ST BK BZ WH	

*Available in 4" increments, maximum fixture length of 98". See fixture detail on page 6. Minimum fixture length 6".

- **BW** comes in standard 36" - request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
- Specify **CL2P** for plenum rated wire





- 5 year warranty
- Field modifications void warranty
- Data subject to change, all data has +/- 5% tolerance

- Compatible for use with Q-Tran power supplies
- Florida Fish and Wildlife Conservation Commission (FWC) rated strips: DRY and WET rated, Red and Amber

VERS-CLEAR (03)

Linear Fixtures - Surface



RGBW High Efficacy    

Product	W/FT	CCT	Rated	Lens	Louver	Input/ Output	Connector/ Wire In	Connector/ Wire Out	Wire Color	Wire Type	Mounting	Finish	Length* (in)
VERS-03- RGBW				CL									
<div><div><div>Voltage: 24 VDC</div><div>Typical lumens at 4.0W/ft with FR lens at 3000K: 86 lm/ft</div></div><div><div>4.0HE 8.0HE</div><div>RGBW-27 RGBW-30</div><div>4.0HE RGBW-27 RGBW-30</div></div><div><div>DRY (IP20)</div><div>DMP (IP54)</div><div>WET (IP67)</div></div><div><div>L1-WH L1-BK N/A</div><div>S1 S2 S3 S4</div><div>P1 P2 P3 P4</div></div><div><div>BW CON6 CON24</div><div>CLS</div><div>BW CON6 CON24</div><div>BW CON6 CON24</div></div><div><div>WH BK</div><div>CL2 CL2P</div><div>CC MG</div><div>ST BK BZ WH</div></div></div>													

Single
(Closed exit)

Pass through

*Available in 2" increments, maximum
fixture length of 98". See fixture detail on
page 6. Minimum fixture length 6".

- **BW** comes in standard 36"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is Type S1, Connector/Wire In: BW & Connector/Wire Out: CLS
- Specify **CL2P** for plenum rated wire

- 5 year warranty
 - Field modifications void warranty
- Data subject to change, all data has +/- 5% tolerance
 - Compatible for use with Q-Tran power supplies

VERS-CLEAR (03)

Linear Fixtures - Surface



Technical Information Delivered lumens

See photometric files for complete details.

Static White [Calculated L70 = 70000 hrs]

Tested with VERS-03-SW-**-30-DRY-CL

	1.5W/FT		3.0W/FT		4.0W/FT		5.0W/FT		6.0W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	158	98	276	98	356	98	427	98	500	98

Static White High Efficacy

[Calculated L70 = 70000 hrs]

Tested with VERS-03-SW-**-30-DRY-CL

	1.5HE W/FT		3.0HE W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	200	98	381	98	692	98	1024	98

Dynamic White

[Calculated L70 = 70000 hrs]

Tested with VERS-03-DW-6.0-**-DRY-CL

	2000K		2700K		3000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	222	93	242	97	256	98

Dynamic White High Efficacy

[Calculated L70 = 70000 hrs]

Tested with VERS-03-DW-5.0HE-**-DRY-CL

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	217	93	241	98	254	98	261	97	285	97

Static Color

[Calculated L70 = 30000 hrs]

Tested with VERS-03-SC-5.0-**-DRY-CL

	Red		Green		Blue		Amber	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
CL	119	634	569	519	129	467	90	595

Warm Dim

[Calculated L70 = 70000 hrs]

Tested with VERS-03-WD-6.0-**-DRY-CL

	2700K		3000K	
	LM/FT	CRI	LM/FT	CRI
CL	471	97	488	97

RGB [Calculated L70 = 55000 hrs]

Tested with VERS-03-RGB-6.0-RGB-DRY-CL

	Red		Green		Blue	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
CL	90	632	180	522	48	469

RGBW [Calculated L70 = 30000 hrs]

Tested with VERS-03-RGBW-6.0-**-DRY-CL

	2700K		3000K		Red		Green		Blue	
	LM/FT	CRI	LM/FT	CRI	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
CL	135	93	146	92	40	632	115	514	34	465

RGBW High Efficacy [Calculated L70 = 70000 hrs]

Tested with VERS-03-RGBW-4.0HE-**-DRY-CL

	2700K		3000K		Red		Green		Blue	
	LM/FT	CRI	LM/FT	CRI	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
CL	70	97	86	97	26	628	115	523	30	469

Temperature Ratings Dependent on LED Strip W/FT

Light Engine (LED Strip)	W/FT	Minimum Limit (°F)	Maximum Limit (°F)
Static White	1.5	-40	138
	3.0	-40	124
	4.0	-40	115
	5.0	-40	108
Static White High-Efficacy	1.5HE	-40	152
	3.0HE	-40	140
	6.0HE	-40	118
	9.0HE	-40	95


VERS-CLEAR (03)

Linear Fixtures - Surface




Lens


with LED visibility




Beam Angle



NOTE: Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see IES PDF file.




Finish

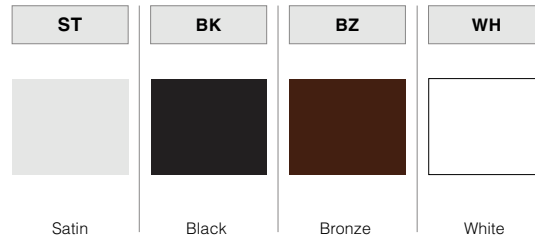


Input/Output


SINGLE (Input only)

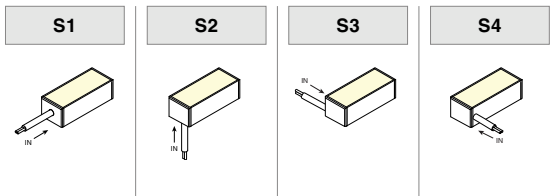


PASS THROUGH (Input/Output)

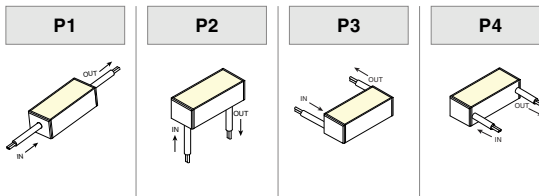


ORDER EXAMPLE




Connector/Wire – In/Out

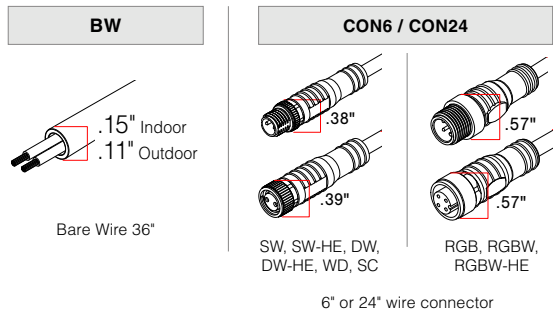


Mounting

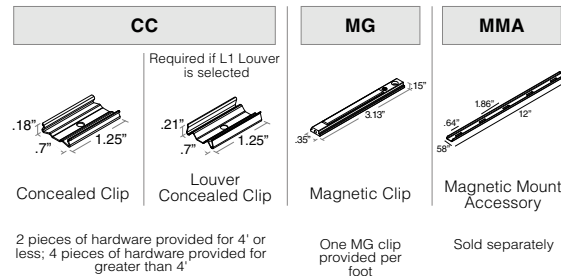


Louver




Dimensions

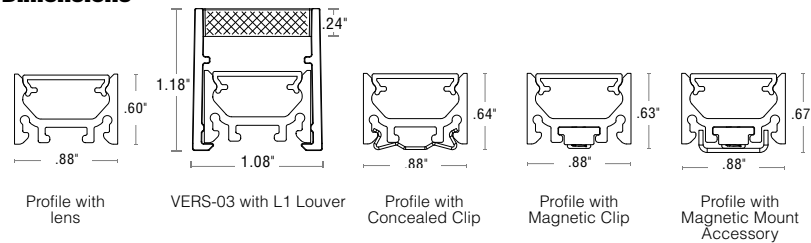

End Caps

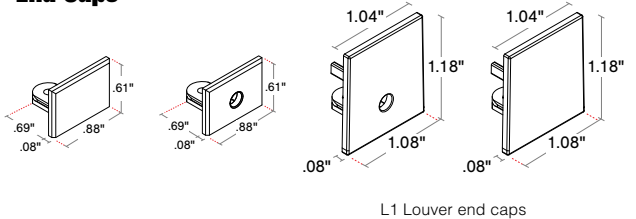

Louver

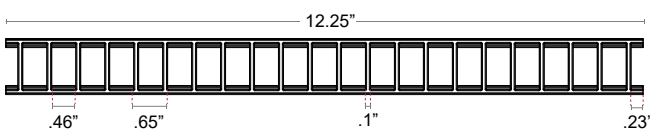

Light Engine Spacing Detail

Add to nominal LED length for fixture length

