

SW-HE+24/3.0

STRIP: High Efficacy Static White



SW-HE+24/3.0, is a 3.0W/ft, 24-volt strip. It is dry- and wet-rated with 2" cutpoints that can be field-cutttable up to 196". Offered with bare wire or barrel connectors, or not soldered. Pair with an aluminum extrusion to create a custom fixture.


Technical Information

[Calculated L70 = 50000 hours]

Tested with SW-HE+24/3.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
● 2700K	613	187 Lm/W	93	65	92	100
● 3000K	587	179 Lm/W	92	63	91	100
● 3500K	637	194 Lm/W	93	78	91	100
○ 4000K	716	210 Lm/W	92	59	89	97

Dimensions

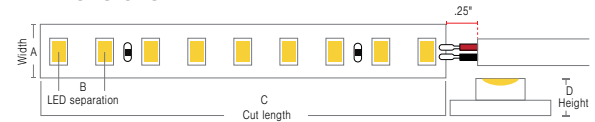

Section (in)	A	B	C	D
DRY (IP20)	0.39"	0.22"	2.00"	0.07"
WET (IP67)	0.47"	0.22"	2.00"	0.18"

Part Number Builder

V/Watts	Rated	CCT - Lumens/CRI	Connector/ Wire In	Connector/ Wire Out	Wire Color	Wire Type	Illuminated Length (in)
SW-HE+24/3.0 Voltage: 24 VDC Wattage: 3.0 W/ft							
	DRY (IP20)	27 - 2700K 613/93 30 - 3000K 587/92 35 - 3500K 637/93 40 - 4000K 716/92	BW BRL CLS CON6 CON24	CLS BW BRL CON6 CON24	WH BK N/A	CL2 CL2P N/A	2" increments 2"-196" OR MATCH
	WET (IP67)	27 - 2700K ***/* 30 - 3000K ***/* 35 - 3500K ***/* 40 - 4000K ***/*	BW BRL	CLS BW BRL	WH BK N/A	CL2 CL2P N/A	2"-196" OR MATCH

- If selecting **BRL**, select **N/A** for wire color and type
- **BW** comes in standard 24"- request custom length (Max 120") by writing it in inches next to "BW" in the order code box (ex. BW48)
- Wire orientation for **MATCH** will be dictated by extrusion Feed In/Feed Out selection
- **Connector/Wire In or Out** not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire Out
- **CL2** wire is standard non-plenum wire, **CL2P** wire is plenum rated
- **ALL HE STRIPS MUST BE USED WITH A COMPATIBLE EXTRUSION**

- 5 year warranty
- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void
- All data has +/- 5% tolerance
- UL Listed
- Suitable for installation in the storage area of a clothes closet when assembled as a fixture at Q-Tran facility



SW-HE+24/3.0

STRIP: High Efficacy Static White



Compatible Extrusions

	SLIM	WIDE	ROND	TORQ	TRE3	LALO	TALO
DRY	✓	✓	✓	✓	✓	✓	✓
DMP							
ENC							
WET		✓				✓	✓

	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI
DRY	✓	✓	✓	✓	✓	✓	✓	✓
DMP								
ENC								
WET	✓	✓			✓			

Connector/Wire – In/Out

BW Bare Wire 24"	BRL Barrel 6"	CON6 Connector 6"	CON24 Connector 24"	CLS Not soldered
--------------------------------	-----------------------------	---------------------------------	-----------------------------------	--------------------------------

Compatible Power Supplies

See website for additional power supply options

QZ 	iQ-PH-80
---------------	---------------------