

# LiNi XL Wallwasher 5T

## Fixture Guide

Indoor | Trimless | Low output up to 500lm/module




### Key applications

- ✓ Ceiling
- ✓ Downlighting
- ✓ Interior
- ✓ Picture display
- ✓ Wall grazing
- ✓ Wallwashing

### Key features

- ✓ High lumen efficacy
- ✓ IP20
- ✓ Lensed
- ✓ Output low
- ✓ Trimless

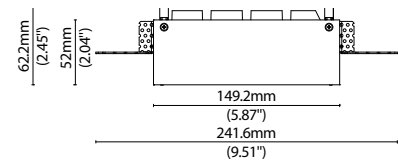



# LiNi XL Wallwasher 5T

## Specification sheet



<b>LED Pitch</b>	12.95mm (0.51in)
<b>Dimension</b>	H62.5/W41.1/D241.6(149.2)mm (H2.46/W1.61/D9.51(5.87) in)
<b>Chip</b>	<b>hcc-line</b> CREE
<b>Beam angle</b>	92.5
<b>Colours</b>	2700K/3000K/4000K
<b>Bin/Step</b>	3-step MacAdam ellipse
<b>CRI</b>	90
<b>Lifetime</b>	50,000 hours @ 25°C (50,000 hours @ 77°F)
<b>Operating temp</b>	T <sub>a</sub> = -20°C to 40°C (T <sub>c</sub> max = 80°C) T <sub>a</sub> = -4 to 104°F (T <sub>c</sub> max = 176°F)
<b>IP rating</b>	IP20
<b>Finish</b>	Matt white/Black paint
<b>Cover/lens</b>	Matt reflector
<b>Mounting</b>	Recessed mounting, Trimless type
<b>Power feed</b>	Single IP20 Connector
<b>Control</b>	Constant current





### PERFORMANCE DATA

Power Consumption	Supply voltage	Supply current
11W	16V	700mA

### Colour Rendering Index (CRI)

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
2700K	91	92	94	92	90	90	93	82	51	83	91	79	92	95
3000K	93	95	96	95	92	96	94	81	61	92	93	80	94	98
4000K	90	93	94	94	92	93	93	81	50	86	93	77	90	97

Reflector		CRI	R9	Rf	Rg
hcc-line	500lm/module 45lm/W	93	63		

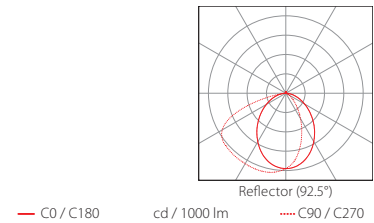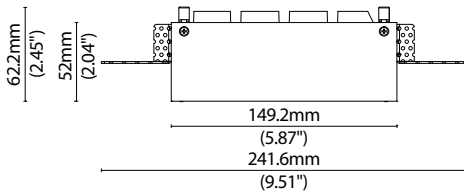

# LiNi XL Wallwasher 5T

## Code Table



### FIXTURE

Model	Finish	Cover	Option	Colour (CCT)	IP	Cable Length	Power Feed	Lens	Control Type	Input				
LiNi XL Spot	LP	Matt White paint MW	Reflector V	5 Wallwasher Trimless <sup>1</sup>	5W2	2700K 27	IP20 20	700mm/27.56" 0700	Single no sheath IP20 connector	S20X	24° 24	40° 40	No Controller 5	CC 700mA i
		Matt Black paint MB				3000K 30								
						4000K 40								

<sup>1</sup> Wallwasher type is only with reflector having the beam angle of 92.5°

### Code Example:

LP	-	MW	-	V	-	5W2	-	30	-	20	-	0700	-	S20X	-	24	-	5	-	i
LiNi XL Spot		Matt White paint		Reflector		5 Wallwasher Trimless		3000K		IP20		700mm/27.56"		Single no sheath IP20 connector		24°		No Controller		CC 700mA

### LED ENGINE VARIANTS (LED STRIP TYPE)

Luminaire	Output	Lumen/module	W	Spec Doc	LED Pitch	Dimension
LiNi XL Spot 5 Trimless	Mid	750	11	LiNi XL Spot 5T	27.5mm (1.08in)	H60/W41/D242(150)mm (H2.36/W1.61/D9.53(5.87)in)
<b>LiNi XL Wallwasher 5 Trimless</b>	<b>Low</b>	<b>500</b>	<b>11</b>	<b>LiNi XL Wallwasher 5T</b>	<b>12.95mm (0.51in)</b>	<b>H62.5/W41.1/D241.6(149.2)mm (H2.46/W1.61/D9.51(5.87)in)</b>

\* Performance data: hcc-line, reflector, 3000K

### AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	HLG-60H-C350A	90-305V	100V-200V	0.35A	70W	-	IP65
	HLG-60H-C700A	90-305V	50V-100V	0.7A	70W	-	IP65
	HLG-80H-C350A	90-305V	128V-257V	0.35A	90W	-	IP65
	HLG-80H-C700A	90-305V	64V-129V	0.7A	90W	-	IP65
	HLG-120H-C350A	90-305V	215-430V	0.35A	150W	-	IP65
	HLG-120H-C700A	90-305V	107V-215V	0.7A	150W	-	IP65
	HLG-185H-C700A	90-305V	143V-286V	0.7A	199W	-	IP65
0-10V (1-10V)	HLG-60H-C350B	90-305V	100V-200V	0.35A	70W	-	IP67
	HLG-60H-C700B	90-305V	50V-100V	0.7A	70W	-	IP67
	HLG-80H-C350B	90-305V	128V-257V	0.35A	90W	-	IP67
	HLG-80H-C700B	90-305V	64V-129V	0.7A	90W	-	IP67
	HLG-120H-C350B	90-305V	215-430V	0.35A	150W	-	IP67
	HLG-120H-C700B	90-305V	107V-215V	0.7A	150W	-	IP67
	HLG-185H-C700B	90-305V	143V-286V	0.7A	199W	-	IP67
DMX	POWERdrive 1060/A	120 - 277V	2V-57V	0.35A, 0.7A	100W	-	-
	POWERdrive 106/M	120 - 277V	2V-57V	0.35A, 0.7A	100W	-	-
	POWERdrive 106/S	120 - 277V	2V-57V	0.35A, 0.7A	100W	-	-
	POWERdrive 1061/M	120 - 277V	2V-57V	0.35A, 0.7A	100W	-	-
	POWERdrive 1061/S	120 - 277V	2V-57V	0.35A, 0.7A	100W	-	-
DALI	ELG-100-C350DA	180-295V	143-286V	0.35A	100W	-	IP67
	ELG-100-C700DA	180-295V	71-143V	0.7A	100W	-	IP67
	ELG-150-C700DA	180-295V	150-300V	0.7A	150W	-	IP67